



# Inductive Angle Sensor With Analog Output RI360P0-QR14-ELIU5X2-0.3-RS5/S1264

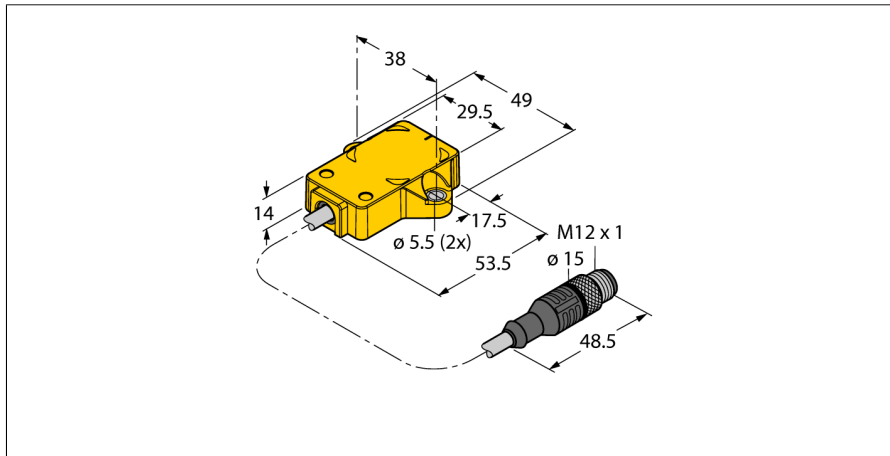

- Rectangular, plastic
- Compact, rugged housing
- Many mounting possibilities
- Measuring range displayed via LED
- Immune to electromagnetic interference
- Resolution, 12-bit
- Output signal returns to 0 V or rather 4 mA, provided the positioning element is outside the measuring range.
- 15...30 VDC
- Analog output
- Programmable measuring range
- 0...10 V and 4...20 mA
- Cable with male connector, M12 × 1


|   |   |
|---|---|
| <b>Type designation</b>                     | RI360P0-QR14-ELIU5X2-0.3-RS5/S1264  |
| Ident-No.                                   | 1590871   |
| <b>Measuring principle</b>                  | inductive   |
| Starting torque shaft load (radial / axial) | Not applicable because of contactless measuring principle                   |
| Resolution                                  | 12 bit  |
| Measuring range                             | 0...360°  |
| Nominal distance                            | 1.5 mm  |
| Linearity deviation                         | ≤ 0.3 % f.s.  |
| Temperature drift                           | ≤ ± 0.01 % / K  |
| Ambient temperature                         | -25...+70 °C  |
| <b>Operating voltage</b>                    | 15...30 VDC   |
| Residual ripple                             | ≤ 10 % U <sub>in</sub>  |
| Isolation test voltage                      | ≤ 0.5 kV  |
| Short-circuit protection                    | yes   |
| Wire breakage/Reverse polarity protection   | yes/ yes (voltage supply)   |
| Output function                             | 5-pin, Analog output  |
| Output type                                 | absolute singleturn   |
| Voltage output                              | 0...10V   |
| Current output                              | 4...20 mA   |
| Load resistance voltage output              | ≥ 4.7 kΩ  |
| Load resistance, current output             | ≤ 0.4 kΩ  |
| Sample rate                                 | 500 Hz  |
| Current consumption                         | < 50 mA   |
| <b>Design</b>                               | Rectangular, QR14   |
| Dimensions                                  | 53.5 x 49 x 14 mm   |
| Shaft Type                                  | Blind hole shaft  |
| Housing material                            | Plastic, PBT-GF30-V0  |
| Electrical connection                       | Cable with connector, M12 × 1   |
| Cable quality                               | 5.2mm, Lif9YH-11YH, PUR, 0.3<br>Flame retardant acc. to VDE 0472, part 804B |
| Cable cross section                         | 5 x 0.34 mm <sup>2</sup>  |
| Vibration resistance                        | 55 Hz (1 mm)  |
| Vibration resistance (EN 60068-2-6)         | 20 g; 10...3000 Hz; 50 cycles; 3 axes                                       |
| Shock resistance (EN 60068-2-27)            | 100 g; 11 ms ½ sinus; each 3x; 3 axes                                       |
| Continuous shock resistance (EN 60068-2-29) | 40 g; 6 ms ½ sinus; each 4000 x; 3 axes                                     |
| Protection class                            | IP68/IP69K  |
| MTTF  | 138 years acc. to SN 29500 (Ed. 99) 40 °C                                   |
| Packaging unit                              | 1   |
| <b>Power-on indication</b>                  | LED, Green  |
| Measuring range display                     | multifunction LED, green  |

### Wiring Diagram

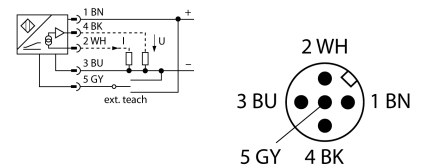

### Functional principle


The measuring principle of inductive angle sensors is based on oscillation circuit coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the angle of the positioning element. The rugged sensors are wear and maintenance-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.

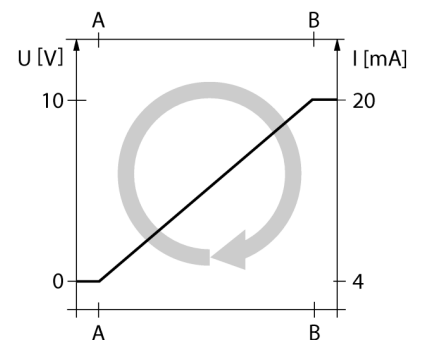

**Inductive Angle Sensor  
With Analog Output  
RI360P0-QR14-ELIU5X2-0.3-RS5/S1264**

**TURCK**  
*works*

Industrial  
Automation

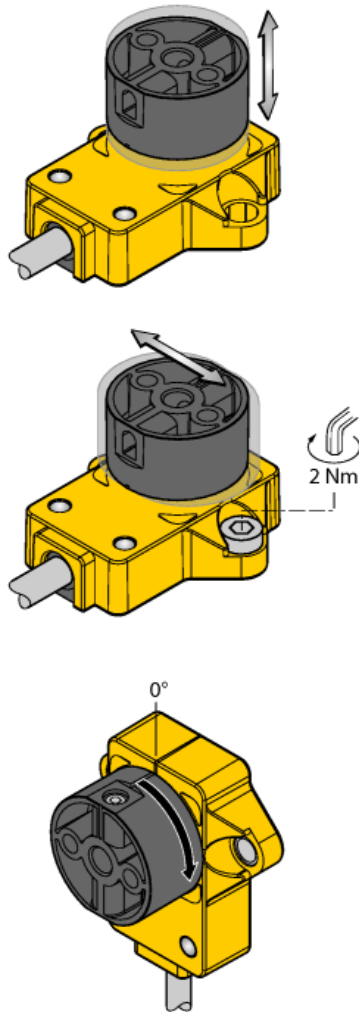

**Adapter pins provide more flexibility**

Extensive range of mounting accessories for easy adaptation to many different shaft diameters.

**LED function**

**Operating voltage**

**Green:** Power on

**Measuring range**

**Green:** Positioning element is in the measuring range

**Green flashing:** Positioning element is in the measuring range, signal low (e.g. distance too large)

**LED OFF:** Positioning element is outside the detection range

**Functional safety through inductive measuring principle**

Based on the functional principle of RLC coupling, the sensor operates absolutely wear-free and is immune to magnetized metal splinters and other interferences. Owing to the differential analysis, the output signal remains almost unchanged, even if the position of the positioning element deviates from the ideal axis of rotation. The distance between the sensor and the positioning element can be up to 5 mm, whereby the nominal distance is 1.5mm.

**Inductive Angle Sensor  
With Analog Output  
RI360P0-QR14-ELIU5X2-0.3-RS5/S1264**



Industrial  
Automation

**Teaching instructions**

**Variably adjustable (teaching with position sensor)**

| Bridge between teach input pin 5 (GY) | Gnd<br>Pin 3 (BU)                              | UB<br>Pin 1 (BN)                              | LED  |
|---------------------------------------|--|---|--|
| 2 seconds                             | Initial value                                  | End value                                     | Power LED flashes then lights steadily after 2 s |
| 10 seconds                            | CCW rotation, then return to last preset value | CW rotation, then return to last preset value | After 10 s power LED flashes quickly for 2 s     |
| 15 seconds                            |  | Factory setting (360°, CW)                    | Power and status LED alternate after 15 seconds  |

**Preset – Mode (teach without position sensor)**

| Bridge between teach input pin 5 (GY) | Gnd<br>Pin 3 (BU)                              | UB<br>Pin 1 (BN)                              | LED   |
|---------------------------------------|--|---|---|
| 2 seconds                             | Activate preset mode                           | Activate preset mode                          | Power LED steady, flashes after 2 s             |
| 10 seconds                            | CCW rotation, then return to last preset value | CW rotation, then return to last preset value | After 10 s power LED flashes quickly for 2 s    |
| 15 seconds                            |  | Factory settings (360°, CW)                   | Power and status LED alternate after 15 seconds |
| Angular range                         | Gnd<br>Pin 3 (BU)                              | UB<br>Pin 1 (BN)                              | Power LED                                       |
| 30°                                   | Press x 1                                      |   | Blinking x 1                                    |
| 45°                                   | Press x 2                                      |   | Blinking x 2                                    |
| 60°                                   | Press x 3                                      |   | Blinking x 3                                    |
| 90°                                   |  | Press x 1                                     | Blinking x 1                                    |
| 180°                                  |  | Press x 2                                     | Blinking x 2                                    |
| 270°                                  |  | Press x 3                                     | Blinking x 3                                    |
| 360°                                  |  | Press x 4                                     | Blinking x 4                                    |

**Inductive Angle Sensor  
With Analog Output  
RI360P0-QR14-ELIU5X2-0.3-RS5/S1264**



**Industrial  
Automation**

**Accessories**

| Type code   | Ident-No. | Description  |  |
|-------------|-----------|--|--|
| P1-RI-QR14  | 1590812   | Positioning element for inductive angle sensors  |  |
| P2-RI-QR14  | 1590819   | Positioning element for inductive angle sensors  |  |
| P3-RI-QR14  | 1590865   | Positioning element for inductive angle sensors, flat design, we recommend using the shield plate SP1 QR14 |  |
| SP1-QR14    | 1590873   | Shield plate Ø 30 mm, aluminium  |  |
| HSA-M6-QR14 | 6901051   | Adapter for Ri-QR14 specific positioning elements, hollow on solid shaft, Ø 6 mm                           |  |

**Inductive Angle Sensor  
With Analog Output  
RI360P0-QR14-ELIU5X2-0.3-RS5/S1264**



**Accessories**

| Type code   | Ident-No. | Description   |  |
|-------------|-----------|---|--|
| HSA-M8-QR14 | 6901052   | Adapter for Ri-QR14 specific positioning elements, hollow on solid shaft, Ø 8 mm                |  |
| DS-RI-QR14  | 1590814   | Spacer sleeves for rear mounting of Ri-QR14, 2 pcs. per bag                                     |  |
| TX1-Q20L60  | 6967114   | Teach adapter for inductive encoders, linear position, angle, ultrasonic and capacitive sensors |  |