



**Model Number**

**LGS100 Serie**

**Light grid**

with fixed cable with 4-pin, M12 x 1 connector, and fixed cable with 8-pin, M12 x 1, connector


**Features**

- Automation light grid
- Optical resolution 100 mm
- Super-fast object detection, even with 3-way beam crossover
- Software-free adjustment of height monitoring
- Object identification using integrated object recognition
- IO-link interface for service and process data
- Optional temperature range to -30 °C

**Product information**


The LGS automation light grid series detects objects ranging in size from small to large. The very slender light grids have a modular design and come in different beam spacings and field heights. All signal evaluation takes place inside the unit. The lightweight systems can be integrated in their surroundings in a well-designed configuration, which means that machines and plants in temperature ranges between -30 °C ... +60 °C can be designed more compactly.

**Dimensions**

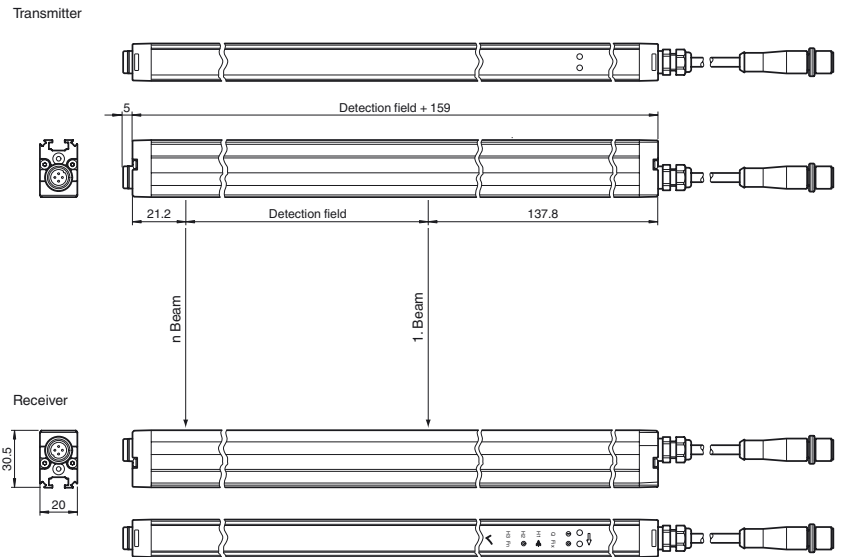


**Electrical connection**


**Transmitter**




**Receiver**

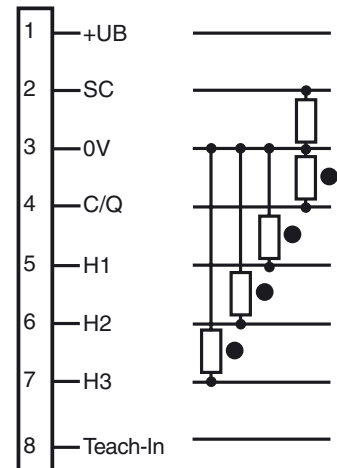

**Pinout**



**Indicators/operating means**



1	Menu button	yellow	7	Height checking 3	yellow
2	Operating indicator	green	8	Object floating	yellow
3	Status display	yellow	9	Crossing	yellow
4	Q object	yellow	10	Peripheral beam tolerance	yellow
5	Height checking 1	yellow	11	2nd level	yellow
6	Height checking 2	yellow	12	OK button	yellow

2nd level: Beam collimation, inverse mode, light-on/dark-on switching, reset factory setting, signal tracking

Release date: 2015-02-26 15:08 Date of issue: 2015-02-26 232508\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**Technical data****General specifications**

Effective detection range	Standard : 0.3 ... 6 m Option /35: 0.5 ... 8 m When beam crossover is activated, the detection range starts at 0.6 m
Threshold detection range	Standard : 7.5 m Option /35: 10 m
Light source	IREDD
Light type	modulated infrared light , 850 nm
Field height	see Table 1, max. 3000 mm
Beam crossover	Factory setting: three beam crossing, deactivateable
Beam blanking	adjustable max. 2 fixed suppressible beam areas (blanking)
Beam spacing	100 mm
Number of beams	see Table 1, max. 31
Operating mode	Emitter: Emitter power adjustable in two ranges
Optical resolution	without beam crossover: 100 mm with beam crossover: 50 mm with in 25% and 75% of the range
Angle of divergence	10 °
Ambient light limit	> 50000 Lux (if external light source is outside the opening angle)

**Functional safety related parameters**

MTTF <sub>d</sub>	78 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	60 %

**Indicators/operating means**

Operation indicator	Power on: LED green, statically lit , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz)
Function indicator	Emitter: Yellow LED, illuminates at high emitting power, off at low emitting power Receiver: Yellow LED: illuminates when an object is detected flashes when falling short of the stability control (4 Hz) Error message: Yellow LED flashes (8 Hz) in emitter and receiver
Control elements	Receiver: 2 touch buttons for programming
Parameterization indicator	IO link communication: green LED goes out briefly (1 Hz)

**Electrical specifications**

Operating voltage	U <sub>B</sub>	18 ... 30 V DC
Ripple		10 %
No-load supply current	I <sub>0</sub>	Emitter ≤: 50 mA Receiver: ≤ 150 mA (without outputs)
Time delay before availability	t <sub>v</sub>	see Table 1, max. 1.1 s

**Interface**

Interface type	IO-Link
Protocol	IO-Link V1.0
Mode	COM 2 (38.4 kBaud)

**Input**

Test input	Emitter switch-off with +UB or 0 V at pin 4 (emitter)
Function input	Range input activation from 1.6 m (or 2 m in case of option /35) with +UB or 0 V on pin 2 (emitter) Teach-In input for programming on pin 8 (receiver)

**Output**

Pre-fault indication output	Stability Control (SC) 1 PNP, short-circuit protected, reverse polarity protected on pin 2 (receiver)
Switching type	Factory setting: dark ON , Switchable to light ON mode
Signal output	Switch output (detection field C/Q) 1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected on pin 4 (receiver), Height monitoring (H1, H2, H3) 3 push-pull (4 in 1) outputs, short-circuit proof, reverse polarity protected on pin 5, pin 6, pin 7 (receiver)
Switching threshold	Factory setting: The signal tracking for the threshold value is deactivated, increasing the optical resolution by a maximum of 4 mm; switchable to active signal tracking
Switching voltage	max. 30 V DC
Switching current	max. 100 mA
Voltage drop	U <sub>d</sub> ≤ 2 V DC
Switching frequency	f see Table 1, max. 135 Hz
Response time	see Table 1, max. 6 ms
Timer function	Off-delay programmable from 0 ... 1.25 s in 5 ms steps (adjustment via IO-Link only)

**Ambient conditions**

Ambient temperature	Standard : -10 ... 60 °C (14 ... 140 °F) Option /146: -30 ... 60 °C (-22 ... 140 °F)
Storage temperature	-30 ... 70 °C (-22 ... 158 °F)

**Mechanical specifications**

Housing length L	see Table 1, max. 3160 mm
Degree of protection	IP67

**Accessories****OMH-LGS-01**

Attachment aid for light grid series LGS/ LGM

**OMH-SLCT-06**

Swivel Bracket

**OMH-SLCT-01**

Quick clamp and adjustment system

**V19-G-EMV-BK0,3M-PVC-V19-G**

Double-ended cordset, M12 to M12, with EMC filter, 8-pin, PVC cable

**OMH-SLCT-03**

Mounting bracket including adjustment

**OMH-SLCT-04**

Mounting bracket including adjustment (with loose bearing)

**OMH-SLCT-05**

Mounting bracket including adjustment

**AA SLCT-01**

Profile alignment aid; simplified alignment of the SLCS and SLCT safety light curtains

**V1-G-BK2M-PUR-U**

Female cordset, M12, 4-pin, PUR cable

**V1-G-BK5M-PUR-U**

Female cordset, M12, 4-pin, PUR cable

**V1-G-BK10M-PUR-U**

Female cordset, M12, 4-pin, PUR cable

**V1-G-BK15M-PUR-U**

Female cordset, M12, 4-pin, PUR cable

**V19-G-BK10M-PUR-IEC**

Female cordset, M12, 8-pin, PUR-cable

**V19-G-BK2M-PUR-IEC**

Female cordset, M12, 8-pin, PUR-cable

**V19-G-BK5M-PUR-IEC**

Female cordset, M12, 8-pin, PUR-cable

**V19-G-BK2M-PUR-U-V1-G**

Connection cable, M12 to M12, 8/4-pin, PUR cable

**IO-Link-Master02-USB**

IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection

**IO-Link-Master-USB DTM**

Communication DTM for use of IO-Link-Master

**PACTware 4.X**

FDT Framework

**IODD Interpreter DTM**

Software for the integration of IODDs in a frame application (e. g. PACTware)

**LGS-Serie IODD**

IODD for communication with LGS-IO-Link sensors

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

Connection Emitter: 200 mm connecting cable with 4-pin, M12x1 connector  
Receiver: 200 mm connecting cable with 8-pin, M12 x 1 connector  
Cable cross section min. 0.25 mm<sup>2</sup>  
Max. cable length 30 m

Material  
Housing extruded aluminum section , Silver anodized  
Optical face Plastic pane , Polycarbonate  
Mass see Table 1, max. 1650 g (per profile)


#### Compliance with standards and directives

Directive conformity  
EMC Directive 2004/108/EC EN 60947-5-2:2007  
Standard conformity  
Product standard EN 60947-5-2:2007  
IEC 60947-5-2:2007

#### Approvals and certificates

Protection class III ( IEC 61140 )  
UL approval cULus Listed  
CCC approval CCC approval / marking not required for products rated ≤36 V

#### Curves/Diagrams

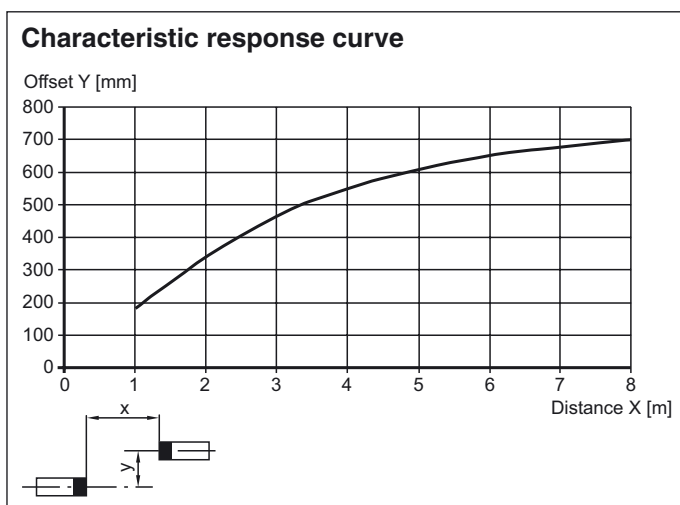

#### Additional information

**Table 1:**

**Switch-on delay, maximum switching frequency and maximum time delay before availability:**

Field height [mm]	Switch-on delay Q [ms] without object parameterization		Switch-on delay Q [ms] with object parameterization, HQn outputs		Max. switching frequency [Hz]	Max. time delay before availability tv [s]
	typ.	max.	typ.	max.		
300	2	4	5	6	136	0.8
600	3	4	5	7	129	0.8
900	3	5	5	7	123	0.9
1200	3	5	5	7	118	0.9
1500	3	5	5	8	113	0.9
1800	3	5	6	8	109	1.0
2100	3	5	6	9	104	1.0
2400	3	5	6	9	101	1.0
2700	3	6	6	9	97	1.1
3000	3	6	6	10	94	1.1

**Number of beams, housing length and weight:**

Field height [mm]	Number of beams	Overall length of the transmitter/receiver unit [mm]	Weight of the transmitter/receiver unit [g]
300	4	460	300
600	7	760	450
900	10	1060	600
1200	13	1360	750
1500	16	1660	900
1800	19	1960	1050

Release date: 2015-02-26 15:08 Date of issue: 2015-02-26 232508\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Field height [mm]	Number of beams	Overall length of the transmitter/receiver unit [mm]	Weight of the transmitter/receiver unit [g]
2100	22	2260	1200
2400	25	2560	1350
2700	28	2860	1500
3000	31	3160	1650

## Design and function

### Safety information

The device must only be operated with Safety Extra Low Voltage (SELV) with safe electrical disconnection. Intervention and repairs must only be carried out by your suppliers.

The system must be serviced and checked regularly.

A clean, soft cloth can be used for cleaning. Aggressive, abrasive cleaning agents that damage the surface must be avoided.

The device must not be subjected to hard knocks or vibration.

### Commissioning

Prerequisites

- The transmitter and receiver must be installed and aligned correctly.
- The electrical connection must be established according to the connection diagram.
- The signal output must respond to object detection.
- If at least one light beam is interrupted, the output remains active as long as the object is detected.

### Fault location

- Measure operating voltage
- Check the cabling.
- Check the transmitter and receiver for dirt and clean if necessary.

### Function displays

Behind the optics cover on the connection side of the profiles there is a green Power ON operating indicator LED and a yellow status display LED.

#### Transmitter

Function	Diagnostic description
Green operating indicator LED lights up statically	Power-On
Green operating indicator LED is dark and yellow status indicator flashes	Power save mode
Yellow status indicator LED is dark	Transmitter with low transmitting power
Yellow status indicator LED lights up statically	Transmitter with high transmitting power
Yellow status indicator LED flashes quickly (approx. 8 Hz)	Error condition
Yellow status indicator LED light changes for short time	Test input is activated

#### Receiver

Function	Diagnostic description
Green operating indicator LED lights up statically	Power-On
Green operating indicator LED is dark	Power save mode
Green operating indicator LED flashes with brief interruption	IO-Link mode active, parameterisation only possible via IO-Link
Green operating indicator LED flashes (4 Hz)	Error condition: Short circuit at the outputs
Yellow status indicator LED lights up statically	Detection field interrupted
Yellow status indicator LED is dark	Detection field is enabled.
Yellow status indicator LED flashes (approx. 4 Hz)	Insufficient function reserve
Yellow status indicator LED flashes quickly (approx. 8 Hz)	Error condition: Incorrect signal measurement


### Resolution and beam clearance

The mechanical beam clearance determines the smallest detectable object size. Crossing the light beams increases the resolution of the light grid.

The devices are delivered without programmed height checking. The beam is crossed three times.

### Resolution of the crossed beam arrangement

If three-way crossing of the beams is programmed, the resolution increases. For a three-way crossing, this means that the increased resolution is offered after 25% of the transmitter range or receiver range. It must therefore be ensured that all objects pass transmitters or receivers with this clearance.

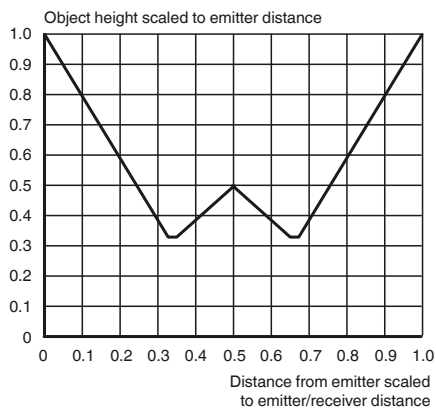

## Model number

L	G	S	x	x	x	-	y	y	y	y	-	IO	/	z	z	z
---	---	---	---	---	---	---	---	---	---	---	---	----	---	---	---	---

Resolution [mm]

(8 mm; 17 mm; 25 mm; 50 mm; 100 mm)

Detection field [mm]

(min. 100 mm ... max. 3200 mm -&gt; see technical data)

IO-Link-interface

## Options

- /35 extended detection range 8 m
- /110 Push-pull output, switch output 0.1 A, short-circuit protected, reverse polarity protection
- /115b with 0.2 m fixed cable and M12 connector
- /146 extended temperature range -30 °C