

7/8"-Splitters/T-Connectors / Power Tap


0906 UTP 316



7/8" Male to Female (5-pole) Feed Through with 5-pole Drop

Splitter/T-connector, with one 5-pole 7/8" male (external threads) to 5-pole female (internal threads) with 5-pole feed through 5-pole 7/8" female.


0906 UTP 316

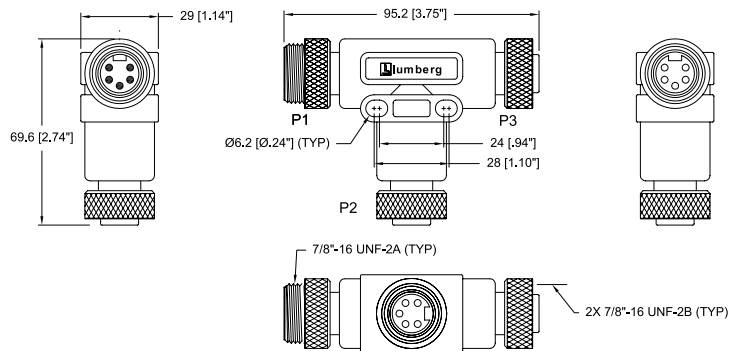

Pin Assignments


Face Views

7/8 - 2 poles



1 = white
2 = red
3 = green
4 = orange
5 = black

Wiring Diagram





7/8"-Splitters/T-Connectors / Power Tap
0906 UTP 316

Technical Data

Environmental

Degree of protection IP 68 / NEMA 6P
Operating temperature range -40°C (-40°F) / +90°C (+194°F)

Mechanical

Housing / Molded body PUR, yellow
Coupling nut Aluminum, black anodized
Contact Solid-machined brass, gold plated
Insert PUR, yellow

Electrical

Nominal current 8 A
Nominal voltage 600 V

Part Number	Pins	Characteristics
0906 UTP 316	5	 

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumberg Automation:](#)

[0906 UTP 316](#)