


P 17 Tempra Pro IP 66/67 - LV 16/32/63/125 A

selection chart

Conform to : BS EN 60309-1, IEC 60309-1, BS EN 60309-2 and IEC 60309-2 IP 44 according to BS EN 60529 and IEC 60529 IK 09 according to BS EN 62262 and IEC 62262 Material : polyamide 6 or plastic (see p. 183 for details) Self-extinguishing : 850 °C (support of active parts) / 650 °C (plastic housing)  Technical information and dimensions p. 184-187			FUNCTIONS					
			PANEL MOUNTING SOCKETS	SURFACE MOUNTING SOCKETS	MOBILE SOCKETS	STRAIGHT PLUGS	APPLIANCE INLETS	
LV								
100 to 130 V 50/60 Hz	16 A	2 P + \perp	5553 81	5553 51	5553 01	5553 21	–	
	32 A	2 P + \perp	5554 81	5554 51	–	5554 31	–	
200 to 250 V 50/60 Hz	16 A	2 P + \perp	5553 84	5553 54	5553 04	5553 24	0568 03 ¹	
	32 A	2 P + \perp	5554 84	5554 54	5554 14	5554 34	0568 23 ¹	
	63 A	2 P + \perp	0587 20 ¹	0587 40 ¹	0587 10 ¹	0587 00 ¹	0587 30 ¹	
380 to 415 V 50/60 Hz	16 A	3 P + \perp	5553 88	5553 58	5553 08	5553 28	0568 07 ¹	
		3 P + N + \perp	5553 89	5553 59	5553 09	5553 29	0568 08 ¹	
	32 A	3 P + \perp	5554 88	5554 58	5554 18	5554 38	0568 27 ¹	
		3 P + N + \perp	5554 89	5554 59	5554 19	5554 39	0568 28 ¹	
	63 A	3 P + \perp	0587 24 ¹	0587 44 ¹	0587 14 ¹	0587 04 ¹	0587 34 ¹	
		3 P + N + \perp	0587 25 ¹	0587 45 ¹	0587 15 ¹	0587 05 ¹	0587 35 ¹	
	125 A	3 P + N + \perp	0591 17 ¹	0591 07 ¹	0591 37 ¹	0591 27 ¹	0591 47 ¹	

¹ : Appliance inlets and all 63 A and 125 A products are P17 Tempra items which are manufactured from plastic
 For pack quantities, see p. 183

ADAPTOR

Conform to BS EN 60309-1,
 BS EN 60309-2, IEC 60309-1
 and IEC 60309-2
 Self-extinguishing : 850 °C
 Temp. rating : –15 °C to +40 °C

 Dimensions
 p. 186

16 A – 230 V

	Pack	Cat. No.
IEC 2 P + \perp plug – 13 A 2 P + \perp B.S. socket	10	0521 01

P 17 Tempra Pro IP 66/67 LV 16 and 32 A



Technical information and dimensions **p. 184-187**
Conformity to International Standards **p. 198**

Conform to BS EN 60309-1, IEC 60309-1, BS EN 60309-2 and IEC 60309-2
IP 44 according to BS EN 60529 and IEC 60529
IK 09 according to BS EN 62262 and IEC 62262
Material : polyamide 6 or plastic (see below)
Self-extinguishing : 850 °C (support of active parts) / 650 °C (plastic housing)

Pack	Cat. Nos.	Panel mounting sockets
		NEW Material : polyamide 6 Can be fixed on the faceplates (p. 195)
5	16 A 32 A 5553 81 5554 81	100/130 V 2 P + ⊥
5	5553 84 5554 84	200/250 V 2 P + ⊥
5	5553 88 5554 88	380/415 V 3 P + ⊥
5	5553 89 5554 89	380/415 V 3 P + N + ⊥


Pack	Cat. Nos.	Surface mounting sockets
		NEW Material : polyamide 6 Two possible angles (5° or 25°)
5	16 A 32 A 5553 51 5554 51	100/130 V 2 P + ⊥
5	5553 54 5554 54	200/250 V 2 P + ⊥
5	5553 58 5554 58	380/415 V 3 P + ⊥
5	5553 59 5554 59	380/415 V 3 P + N + ⊥

Pack	Cat. Nos.	Mobile sockets
		NEW Material : polyamide 6 Supplied unlocked
5	16 A 32 A 5553 01 5554 01	100/130 V 2 P + ⊥
5	5553 04 5554 14	200/250 V 2 P + ⊥
5	5553 08 5554 18	380/415 V 3 P + ⊥
5	5553 09 5554 19	380/415 V 3 P + N + ⊥

Pack	Cat. Nos.	Straight plugs
		NEW Material : polyamide 6 Supplied unlocked
5	16 A 32 A 5553 21 5554 31	100/130 V 2 P + ⊥
5	5553 24 5554 34	200/250 V 2 P + ⊥
5	5553 28 5554 38	380/415 V 3 P + ⊥
5	5553 29 5554 39	380/415 V 3 P + N + ⊥

Pack	Cat. Nos.	Appliance inlets ¹
		Material : plastic
5	16 A 32 A 0 568 03 0 568 23	200/250 V 2 P + ⊥
5	0 568 07 0 568 27	380/415 V 3 P + ⊥
5	0 568 08 0 568 28	380/415 V 3 P + N + ⊥

P 17 Tempra IP 66/67 LV 63 and 125 A

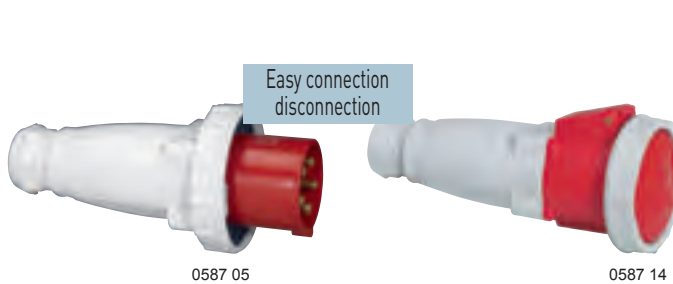

Technical information and dimensions **p. 185-187**
Conformity to International Standards **p. 198**

Conform to BS EN 60309-1, IEC 60309-1, BS EN 60309-2 and IEC 60309-2
IP 44 according to BS EN 60529 and IEC 60529
IK 09 according to BS EN 62262 and IEC 62262
Material : plastic
Self-extinguishing : 850 °C (support of active parts) / 650 °C (plastic housing)

Pack	Cat. Nos.	Panel mounting sockets ¹
		Can be fixed on the faceplates Cat. Nos 0577 17/19 (p. 195)
2	63 A 125 A 0587 20	200/250 V 2 P + ⊥
2 1	0587 24	380/415 V 3 P + ⊥
2 1	0587 25 0591 17	380/415 V 3 P + N + ⊥

Pack	Cat. Nos.	Surface mounting sockets ¹
2	63 A 125 A 0587 40	200/250 V 2 P + ⊥
2 1	0587 44	380/415 V 3 P + ⊥
2 1	0587 45 0591 07	380/415 V 3 P + N + ⊥

Pack	Cat. Nos.	Mobile sockets ¹
2	63 A 125 A 0587 10	200/250 V 2 P + ⊥
2 1	0587 14	380/415 V 3 P + ⊥
2 1	0587 15 0591 37	380/415 V 3 P + N + ⊥

Pack	Cat. Nos.	Straight plugs ¹
2	63 A 125 A 0587 00	200/250 V 2 P + ⊥
2 1	0587 04	380/415 V 3 P + ⊥
2 1	0587 05 0591 27	380/415 V 3 P + N + ⊥

Pack	Cat. Nos.	Appliance inlets ¹
2	63 A 125 A 0587 30	200/250 V 2 P + ⊥
2 1	0587 34	380/415 V 3 P + ⊥
2 1	0587 35 0591 47	380/415 V 3 P + N + ⊥

¹ : Appliance inlets and all 63 A and 125 A products are P17 Tempra items which are manufactured from plastic

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



KEMPSTON
CONTROLS