

Arteor™ hotel equipment

key fob switches



5727 30

Support frames and surround plates selection charts **p. 32-35**


Mechanisms supplied with white or magnesium square cover plates
To be equipped with support frames **p. 31** and surround plates **p. 32-45**

Pack	Cat. Nos.	Key card switches		
1	<table border="1"> <tr> <td>White 5722 30</td> <td>Magnesium 5727 30</td> </tr> </table>	White 5722 30	Magnesium 5727 30	<p>Energise a circuit by inserting a key card or fob (e.g. hotel room, meeting room) Time-delay of approx. 30 secs. after card removal 2 modules 22.5 x 45 mm</p> <p>Mechanical key card switches Key fob switches 230 V Use with key fob Cat. Nos. 5722 59 and 5727 59 or a smart card (access card for a hotel room)</p> <p> Key card switches 12-24 V To be equipped with single pole latching relay Cat. Nos. 5722 27 and 5727 27 p. 17</p> <p>Key card switches RFID Works only with ISO type contactless key card Cat. Nos. 0767 11 or other ISO type 13.56 MHz key card Key card switches RFID Low capacity contact 230 V - 30 VA Lighting of the slot by LED</p>
White 5722 30	Magnesium 5727 30			
1	5722 31 5734 93			
1	<table border="1"> <tr> <td>White 5722 53</td> <td>Magnesium 5727 53</td> </tr> </table>	White 5722 53	Magnesium 5727 53	
White 5722 53	Magnesium 5727 53			

Pack	Cat. Nos.	Key fobs and key card		
10	<table border="1"> <tr> <td>White 5722 59</td> <td>Magnesium 5727 59</td> </tr> </table>	White 5722 59	Magnesium 5727 59	<p>For mechanical key card switches Key fob Enables use of key fob switches in hotels with key locks Supplied complete with a label holder for individual hotel identification</p>
White 5722 59	Magnesium 5727 59			
10	0767 11	<p>For RFID key card switches MIFARE contactless badge card ISO format (50 x 80 mm) Chip: 13.56 MHz Standard 1 KB memory</p>		

Arteor™ hotel equipment

shaver sockets

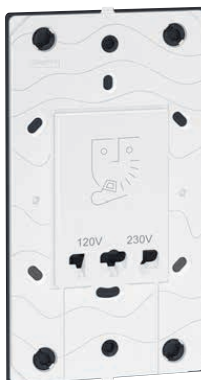

5721 53

Support frames and surround plates selection charts **p. 32-35**

Mechanisms supplied with white or magnesium square cover plates
To be equipped with support frames **p. 31** and surround plates **p. 32-45**

Pack	Cat. Nos.	Shaver sockets		
1	<table border="1"> <tr> <td>White 5721 53</td> <td>Magnesium 5726 53</td> </tr> </table>	White 5721 53	Magnesium 5726 53	<p>Conform to BS EN 61558-2-5. IP 24 For use with European, British, American, Australian 2-pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates micro-switch which energises transformer To be equipped with BS 2 gang - 3 module plates p. 32-35 For flush mounting boxes, use BS 2 gang box depth 48 mm, US type, Italian type boxes depth 48 mm Power supply : 230 V - 50/60 Hz 3 modules 22.5 x 45 mm 230 V / 120-230 V With earth connector</p>
White 5721 53	Magnesium 5726 53			