



AUXILIARY SWITCH BLOCK, DIN EN 50005,
1NO+1NC,
CABLE ENTRY FROM ABOVE SCREW CONNECTION,
FOR CONTACTORS FOR SWITCHING MOTORS,
2-POLE

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts

- instantaneous switching

1

Number of NO contacts / for auxiliary contacts

- instantaneous switching

1

Operating current / of the auxiliary contacts / at AC-15

- at 230 V

A

6

Installation/mounting/dimensions:

Type of mounting

snap-on mounting









Connections:

Design of the electrical connection

- for auxiliary and control current circuit


screw-type terminals

Certificates/approvals:

General Product Approval				Functional Safety / Safety of Machinery	Declaration of Conformity
 CCC	 CSA	 GOST	 UL	Type Examination	 EG-Konf.
Test Certificates	Shipping Approval		other		
Special Test Certificate	 ABS	 GL	 RMRS	Environmental Confirmations	

Further information:

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/industrial-controls/catalogs>
- Industry Mall (Online ordering system)**
<http://www.siemens.com/industrial-controls/mall>
- Cax online generator:**
<http://www.siemens.com/cax>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<http://support.automation.siemens.com/WW/view/en/3RH1921-1LA11/all>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1921-1LA11

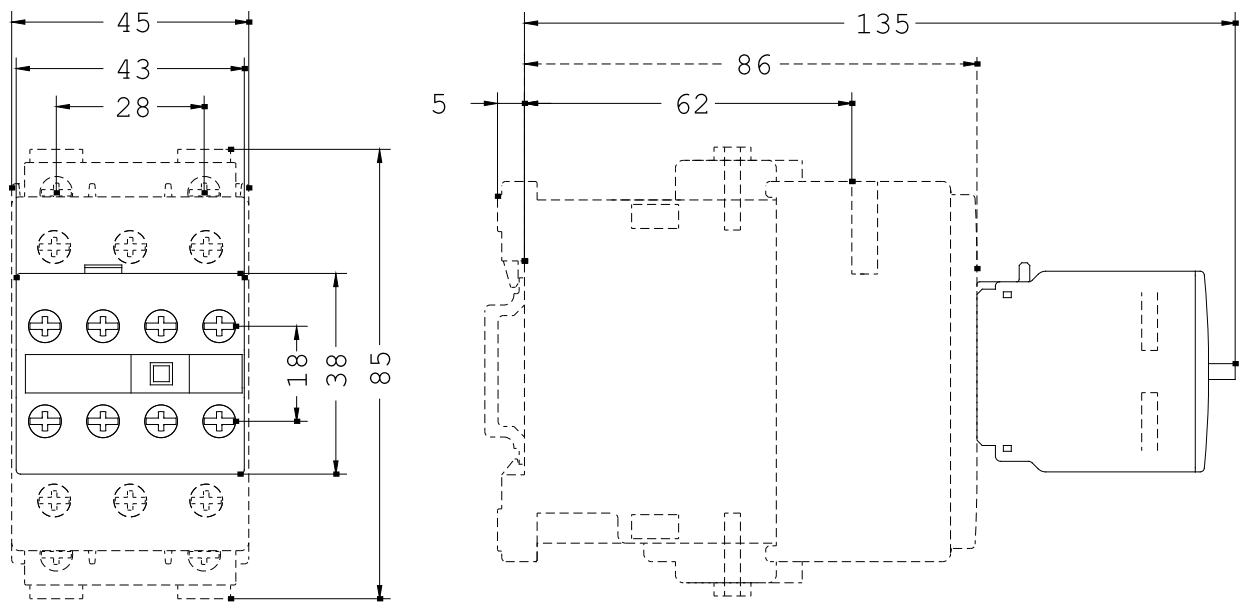

last change: Sep 17, 2012