
SIEMENS

Data sheet

3RF2320-1AA02

Solid-state contactor 1-phase 3RF2 AC 51 / 20 A / 40 °C 24-230 V / 24 V

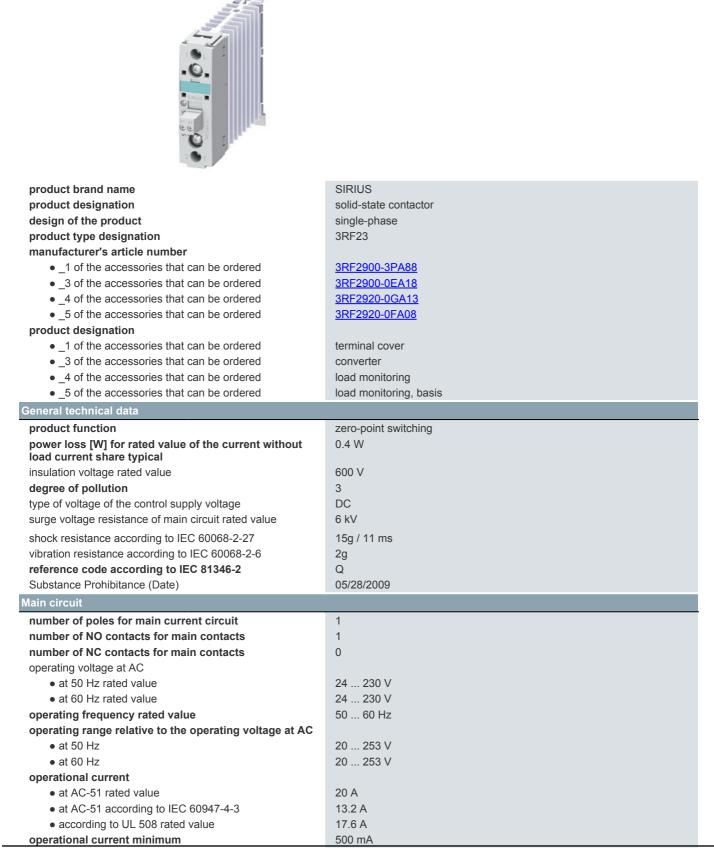

DC screw terminal

	4.000.1//
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/µs
blocking voltage at the thyristor for main contacts maximum permissible	800 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
l2t value maximum	1 800 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
 at DC rated value 	30 V
• at DC	15 24 V
control supply voltage	
 at DC initial value for signal <1> detection 	15 V
 at DC full-scale value for signal<0> recognition 	5 V
control current at minimum control supply voltage	
• at DC	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
 side-by-side mounting 	Yes
height	95 mm
width	22.5 mm
depth	120 mm
Connections/ Terminals	
Connections/ Terminals	screw-type terminals
Connections/ Terminals type of electrical connection	screw-type terminals screw-type terminals
Connections/ Terminals type of electrical connection • for main current circuit	
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit	
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections	
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts	screw-type terminals
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid	screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main	screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ²
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ²
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ²
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ²
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts - solid - finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts - solid - finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts - solid - finely stranded with core end processing - finely stranded with core end processing - finely stranded with core end processing	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12)
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — solid — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — of inely stranded without core end processing — finely stranded without core end processing • at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14 2 2.5 N·m
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing — at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14
Connections/ Terminals type of electrical connection 6 for main current circuit type of connectable conductor cross-sections 6 for main contacts	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14 2 2.5 N·m
Connections/ Terminals type of electrical connection • for main current circuit • for main current circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing • for auxiliary and control contacts — solid — finely stranded with core end processing • finely stranded with core end processing — finely stranded with core end processing • finely stranded with core end processing • finely stranded connectable conductor cross section for main contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14 2 2.5 N·m
Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m
Connections/ Terminals type of electrical connection • for main current circuit • for main current circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts — solid — finely stranded with core end processing • for auxiliary and control contacts — solid — finely stranded with core end processing • finely stranded with core end processing — finely stranded with core end processing • finely stranded with core end processing • finely stranded connectable conductor cross section for main contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf-in
Connections/ Terminals type of electrical connection 6 for main current circuit type of connectable conductor cross-sections 6 for main contacts – solid - finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts connectable conductor cross-section for main contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-sections • for auxiliary and control contacts - solid - finely stranded with core end processing • for auxiliary and control contacts - solid - finely stranded with core end processing - finely stranded with core end processing - finely stranded without core end processing - for main contacts AWG number as coded connectable conductor cross section for main contacts	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf-in
 Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit type of connectable conductor cross-sections for main contacts solid finely stranded with core end processing at AWG cables for main contacts connectable conductor cross-section for main contacts at AWG cables for main contacts connectable conductor cross-section for main contacts a solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts a solid finely stranded with core end processing type of connectable conductor cross-sections for auxiliary and control contacts solid finely stranded with core end processing finely stranded without core end processing at AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque for auxiliary and control contacts with screw-type terminals for auxiliary and control contacts with scre	screw-type terminals 2x (1.5 2.5 mm ²), 2x (2.5 6 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (14 10) 1.5 6 mm ² 1 10 mm ² 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (0.5 2.5 mm ²), 2x (0.5 1.0 mm ²) 1x (AWG 20 12) 10 14 2 2.5 N·m 0.5 0.6 N·m 18 22 lbf-in

stripped length of the cable	
for main contacts	7 mm
 for auxiliary and control contacts 	7 mm
Safety related data	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
during operation	-25 +60 °C
• during storage	-55 +80 °C
Electromagnetic compatibility	
conducted interference	2 W// 5 KHz hohovier eritorian 2
 due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 	2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV behavior criterion 2
 due to high-frequency radiation according to IEC 61000-4-6 	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11	4 kV contact discharging / 8 kV air discharging, behavior criterion 2 Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments
Short-circuit protection, design of the fuse link	
manufacturer's article number	
 of gS fuse for semiconductor protection at NH design usable 	<u>3NE1814-0</u>
• of full range R fuse link for semiconductor protection at cylindrical design usable	<u>5SE1325</u>
 of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for complexity protection 	<u>3NE8015-1</u>
 of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection 	<u>3NC1032</u>
at cylindrical design 14 x 51 mm usable	<u>3NC1450</u>
 of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable manufacturer's article number of the qG fuse 	<u>3NC2263</u>
at NH design usable	<u>3NA6807</u>
 at cylindrical design 10 x 38 mm usable 	<u>3NW6007-1</u>
 at cylindrical design 16 x 66 mm deable at cylindrical design 14 x 51 mm usable 	3NW6107-1
• at cylindrical design 22 x 58 mm usable	<u>3NW6207-1</u> ; These fuses have a smaller rated current than the semiconductor relays
manufacturer's article number	
 of DIAZED fuse usable 	<u>5SB2711</u>
 of NEOZED fuse usable 	<u>5SE2320</u>
Certificates/ approvals	
General Product Approval	EMC Declaration of Conformity
Confirmation	
<u>କ</u> (୩)	EAL 🔊 RR
CSM UL	
Declaration of Conformity Test Certificates	other Railway



Special Test Certificate Type Test Certificates/Test Report **Confirmation**



Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2320-1AA02


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2320-1AA02


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RF2320-1AA02

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2320-1AA02&lang=en

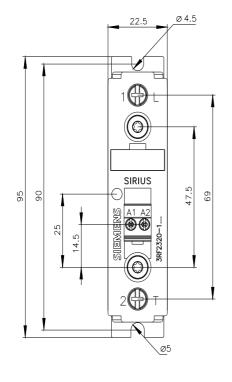

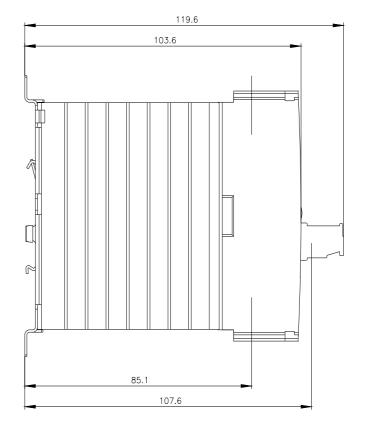

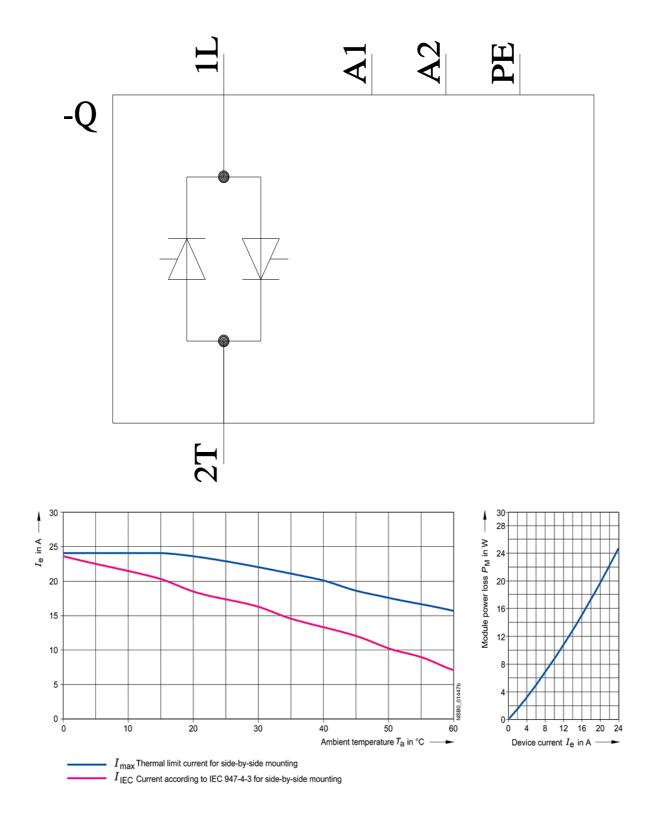

last modified:

1/26/2022 🖸