

Viking 3 heavy duty terminal blocks

selection chart

	TERMINAL TYPE		TERMINAL BLOCK				INSULATION	BRIDGING COMB	PROTECTION		 CAB 3 marking system p. 140
			Max. connection (mm ²)	Width (mm)	Cat. Nos.		Separation and insulation divider	Shunt	Cover 4 blocks	Cover 3 blocks	
					Rail	Rail					
 0390 11 0390 14 Heavy duty terminal blocks p. 133	Cable - cable		-	42	0390 10	-	-	-	0394 46	-	-
			-	55	0390 11	-	-	-	0394 47	-	-
	Cable lug - cable lug		-	36	0390 13	-	-	-	0394 46	-	-
			-	42	0390 14	-	-	-	0394 46	-	-
			-	55	0390 15	-	-	-	0394 47	-	-
			-	42	0390 17	-	-	-	0394 46	-	-
Cable lug - cable		-	55	0390 18	-	-	-	0394 47	-	-	
		-	35	26	0390 71	0390 31	0394 77	-	0394 88	-	
 0390 32 Heavy duty terminal blocks p. 134	For copper bars and cable lugs		-	70	34	0390 72	0390 32	0394 78	-	0394 86	-
			-	120	34	0390 73	0390 33	0394 78	-	0394 86	-
			-	240	46	0390 74	0390 34	0394 78	-	0394 89	0394 86
			-	-	-	-	-	-	-	-	-

CAB 3 marking system p. 140-142




Enclosures p. 14-23



Viking 3 heavy duty terminal blocks

for copper and aluminium cables

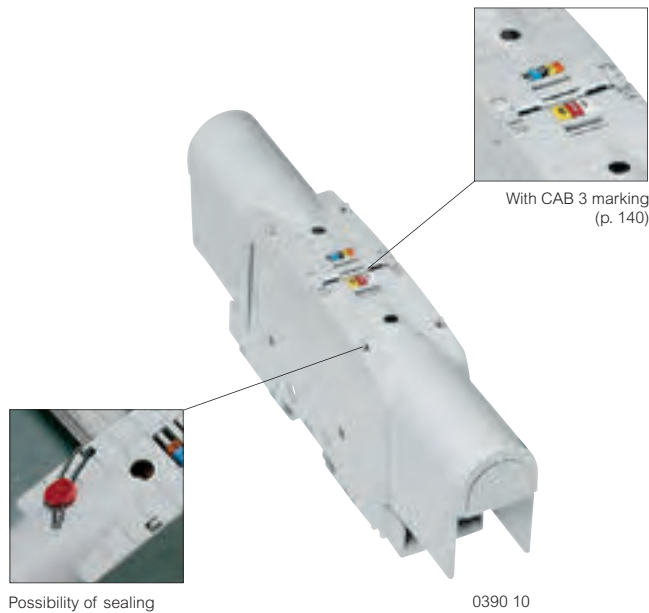

Technical characteristics p. 135

Pack	Cat. Nos.	Heavy duty terminal blocks		
		For copper and aluminium cables		
		IK 04 Conform to IEC 60947-7-1, EN 60947-7-1 UL 1059 and 486 E - CSA 22-2 Fire resistant IEC 60695-2-11 : 960°C (except cover) V2 according to UL 94 Bridging the gap between the enclosure and external cables Fixed using metal clip for rails 15 mm depth and EN 60715, 15 mm depth or on plate with screws Fitted with hinged covers with cut-outs Permits the use of CAB 3 markers Test via test plug Ø4 mm closed covers Blocks with identical width can be joined using a threaded rod Supports shunt with Cat. Nos. 0394 46/47		
5	0390 10	Cable - Cable Rigid or flexible connecting cable (mm ²) Al/Cu 35 to 120	Rigid or flexible connecting cable (mm ²) Cu 35 to 70	Width (mm) 42
5	0390 11	Al/Cu 70 to 300	Cu 70 to 150	55
		Cable lug - Cable lug		
5	0390 13	Connecting plate max. (mm ²) Al/Cu 95	Connecting plate max. (mm ²) Al/Cu 95	Width (mm) 36
5	0390 14	Al/Cu 150	Al/Cu 150	42
5	0390 15	Al/Cu 300	Al/Cu 300	55
		Cable lug - Cable		
5	0390 17	Connecting plate max. (mm ²) Al/Cu 150	Rigid or flexible connecting cable (mm ²) Cu 35 to 95	Width (mm) 42
5	0390 18	Al/Cu 300	Cu 70 to 150	55

Termination options

Cable - Cable



Cable lug - Cable lug



Cable lug - Cable



Pack	Cat. Nos.	Accessories
		Shunt
5	0394 46	For blocks with width 36 and 42 mm
5	0394 47	For blocks with width 55 mm

DIN rails p. 126



Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



KEMPSTON
CONTROLS