



# SIG100-0A0111100

SIG100

SENSOR INTEGRATION GATEWAY

**SICK**  
Sensor Intelligence.



### Ordering information

Type	Part no.
SIG100-0A0111100	1089792

Other models and accessories → [www.sick.com/SIG100](http://www.sick.com/SIG100)



### Detailed technical data

#### Features

<b>Supported products</b>	Binary switching sensors Binary actuators
<b>Further functions</b>	USB connection for easy configuration of the SIG100 Sensor Integration Gateway with SOPAS ET, the engineering tool from SICK, logic editor is available for easy configuration of logic functions

#### Interfaces

<b>Logic editor</b>	✓
<b>USB</b>	✓
<b>IO-Link</b>	✓, V1.1, Port Class A
Function	IO-Link sensor hub (IO-Link slave) with 6 ports which can be used to connect sensors and actuators. the SIG100 Sensor Integration Gateway can therefore connect up to 12 binary switching signals and communicate them via IO-Link to any IO-Link master. SIG100 can also be operated as a standalone system by directly configuring simple logic functions across several connected devices via the SOPAS ET user interface.
<b>IO-Link data transmission rate</b>	≤ 38.4 kBaud, COM2
<b>IO-Link cycle time</b>	< 5.1 ms
<b>IO-Link process data length</b>	8 Byte In und 2 Byte Out
<b>IO-Link process data structure</b>	
8 Byte Process Data In	Bit 0 - Bit 7 = QL1 - QL8 Bit 8 - Bit 19 = Qint1 - Qint12 Bit 20 - bit 31 = Reserved Bit 32 - bit 39 = Analog value 1 (lower byte) Bit 40 - bit 47 = Analog value 1 (upper byte) Bit 48 - bit 55 = Analog value 2 (lower byte) Bit 56 - bit 63 = Analog value 2 (upper byte)
2 bytes process data out (digital mode)	Bit 0 - Bit 15 = IL1 - IL16
2 bytes process data out (analog mode)	Bit 0 - bit 7 = Analog value in (lower byte) Bit 8 - bit 15 = Analog value in (upper byte)

	Comment	<p>QL1 – QL8 = Logic editor outputs</p> <p>Qint1 – Qint12 = Mapping of the individual ports (S1–S6), each with Pin2 and Pin4, onto the IO-Link process data</p> <p>4 bytes analog value 1/2 = Transmission of integer values (e.g., counter value)</p> <p>IL1 – IL16 = Logic editor inputs</p> <p>2 bytes analog value in = Transmission of integer values (e.g., counter value)</p>
<b>Operator interfaces</b>		SOPAS ET, the engineering tool for configuration via USB, SOPAS ET can be downloaded for free from <a href="http://www.sick.com">www.sick.com</a> , the required SSD file for displaying SIG100 via SOPAS ET can either be downloaded from the device or from <a href="http://www.sick.com">www.sick.com</a>
<b>Number of inputs</b>		Max. 12 x PNP, type 1
<b>Number of outputs</b>		Max. 12 x PNP
<b>Inputs/outputs</b>		
	S1-S6	6 ports, Pin2 and Pin4 can be customized as a digital input or digital output to enable the transmission of up to 12 digital input or output signals.
	CONFIG	Port for configuration via USB with SOPAS ET (SOPAS ET can be downloaded for free from <a href="http://www.sick.com">www.sick.com</a> )
<b>Optical indicators</b>		<p>12 Orange (Activity displays, 2 for each port S1–S6 for the display of Pin4 (DI/DO1) and Pin2 (DI/DO2))</p> <p>1 Green (Power/C display)</p>

## Mechanics/electronics

<b>Connections</b>		
	I/O	6 x M12, 5-pin female connector, A-coded
	Power Main	1 x M12, 5-pin male connector, A-coded
	CONFIG	1 x M8, 4-pin female connector, USB 2.0 (USB-A)
<b>Supply voltage</b>		10 V DC ... 30 V DC <sup>1)</sup>
<b>Current consumption</b>		≤ 70 mA without connected sensor
<b>Output current max.</b>		≤ 500 mA total, all connections
<b>Output current</b>		
	S1-S6 I/O supply current	≤ 50 mA
	S1-S6 I/O switching outputs	≤ 50 mA
	Power Port I/O	50 mA
<b>Enclosure rating</b>		IP67
<b>Protection class</b>		III
<b>Electrical safety</b>		EN 60950-1 (2011-01)
<b>Housing material</b>		ABS
<b>Housing color</b>		Light blue (RAL 5012)
<b>Weight</b>		289 g
<b>Dimensions (L x W x H)</b>		198.5 mm x 57 mm x 38.3 mm

<sup>1)</sup> 10 - 30 V DC without IO-Link, 18 - 30 V DC with IO-Link.

## Ambient data

<b>Electromagnetic compatibility (EMC)</b>	<p>EN 61000-6-2:2005-08</p> <p>EN 61000-6-3 (2007-01)</p>
<b>Shock load</b>	EN 60068-2-6
<b>Ambient operating temperature</b>	-40 °C ... +60 °C <sup>1)</sup>

<sup>1)</sup> Permissible relative air humidity: 0 % ... 90 % (non-condensing).


<b>Ambient storage temperature</b>	-40 °C ... +70 °C <sup>1)</sup>
------------------------------------	---------------------------------

<sup>1)</sup> Permissible relative air humidity: 0 % ... 90 % (non-condensing).

### Classifications

<b>ECI@ss 5.0</b>	27242208
<b>ECI@ss 5.1.4</b>	27242608
<b>ECI@ss 6.0</b>	27242608
<b>ECI@ss 6.2</b>	27242608
<b>ECI@ss 7.0</b>	27242608
<b>ECI@ss 8.0</b>	27242608
<b>ECI@ss 8.1</b>	27242608
<b>ECI@ss 9.0</b>	27242608
<b>ETIM 5.0</b>	EC001604
<b>ETIM 6.0</b>	EC001604
<b>UNSPSC 16.0901</b>	32151705

### Dimensional drawing (Dimensions in mm (inch))

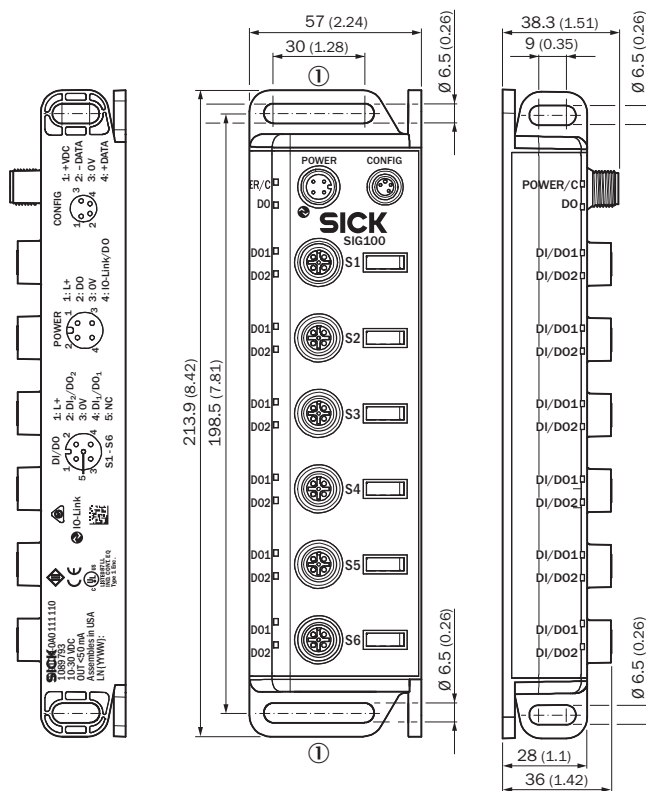


① Elongated mounting hole (4 x), for mounting with M6 screw



Connection diagram

Cd-415



POWER/C



CONFIG




S1-S6





Adjustment possible

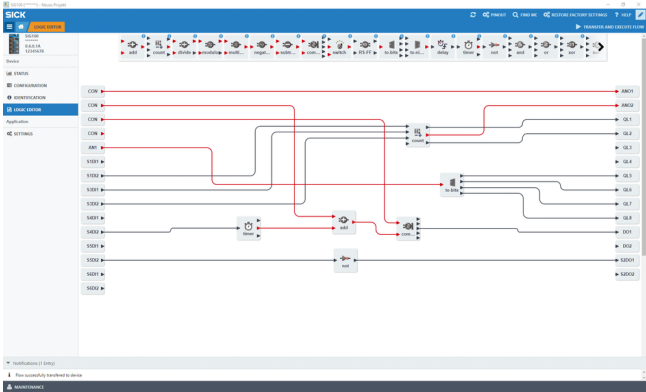





Logic editor



Recommended accessories

Other models and accessories → [www.sick.com/SIG100](http://www.sick.com/SIG100)

	Brief description	Type	Part no.
Adapters and distributors			
		SBO-02C12-SF	6041320
Modules and gateways			
	EtherCAT IO-Link Master, IO-Link V1.1, Port Class A, power supply via 7/8" cable 24 V / 8 A, fieldbus connection via M12 cable	IOLG2EC-03208R01 (IO-Link Master)	6053254

	Brief description	Type	Part no.
	EtherNet/IP IO-Link Master, IO-Link V1.1, Port Class A, power supply via 7/8" cable 24 V / 8 A, fieldbus connection via M12-cable	IOLG2EI-03208R01 (IO-Link Master)	6053255
	PROFINET IO-Link Master, IO-Link V1.1, Port Class A, power supply via 7/8" cable 24 V / 8 A, fieldbus connection via M12 cable	IOLG2PN-03208R01 (IO-Link Master)	6053253
Plug connectors and cables			
	Head A: female connector, M12, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m	YF2A14-050UB3XLEAX	2095608
	Head A: female connector, M12, 4-pin, straight, A-coded Head B: male connector, M12, 4-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 1 m	YF2A14-010UB3M2A14	2095997
	Head A: female connector, M8, 4-pin, angled, A-coded Head B: male connector, M12, 4-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m	YG8U14-050UA3M2A14	2096683
	Head A: male connector, M8, 4-pin, straight Head B: male connector, USB-A, 4-pin, straight Cable: USB 2.0, PVC, shielded, 1.5 m	YM8UA4-015VG3MUSA4	6051163

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)