


Assembled chassis with rails and Lina 25 uprights


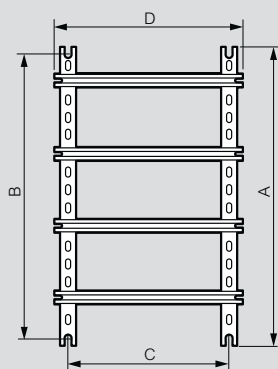


Dimensions of enclosures Height x Width (mm)	Uprights height		Rail length		Chassis fixing	
	A (mm)	D (mm)	B (mm)	C (mm)		
300 x 200	237	143	225	125		
300 x 300	237	243	225	225		
300 x 400	237	343	225	325		
400 x 300	337	243	325	225		
400 x 400	337	343	325	325		
400 x 600	337	543	325	525		
500 x 400	437	343	425	325		
500 x 500	437	443	425	425		
600 x 400	537	343	525	325		
600 x 500	537	443	525	425		
600 x 600	537	543	525	525		
600 x 800	537	743	525	725		
600 x 1000	537	943	525	925		
700 x 500	637	443	625	425		
800 x 600	737	543	725	525		
800 x 800	737	743	725	725		
800 x 1000	737	943	725	925		
1000 x 600	937	543	925	525		
1000 x 800	937	743	925	725		
1000 x 1200	937	1143	925	1125		
1200 x 600	1137	543	1125	525		
1200 x 800	1137	743	1125	725		
1200 x 1000	1137	943	1125	925		
1400 x 800	1337	743	1325	725		

Lina 25 sectioned uprights

Cat. Nos. 0361 50/51/52/53/54/55/56

Cat.No 0361 58/59





1: Saw notch for upright length x pitch 25, the 2 others for uprights Cat. Nos. 0361 50/51/52/53/54/55/56

Rails

Cat. No. 0374 02

Cat. Nos. 0367 80/81/82/83/84



Lock housings for rebate locks or key barrets

Pack	Cat. Nos.	Description
10	0368 04	For Atlantic enclosures Lock



10	0368 05	Handle (with blanking plate)
----	---------	------------------------------



10	0368 06	Handle fitted with key barrel 2433 A
----	---------	--------------------------------------



Padlocking

Padlock adaptor

1	0365 11	Takes 3 safety padlocks Cat. No. 0227 97 Shackle Ø6 mm max. For fitting on Atlantic handle or lock RAL 7021 painted steel
---	---------	---



Large padlock

1	0227 97	To lock the handle of a modular device during maintenance Ø6 mm, 50 mm length Supplied with two keys and labels
---	---------	---

Locking latches

10	0368 43	For Atlantic 1-door enclosure
----	---------	-------------------------------



Metal rebate locks

10	0368 17	For Atlantic enclosures Triangle male 6.5 mm
10	0368 18	Triangle male 8 mm
10	0368 19	Triangle male 9 mm (EDF)



10	0368 20	Double bar
----	---------	------------

Key barrets

10	0368 22	For Atlantic enclosures Supplied with set of 2 key
10	0368 23	For key No 405
10	0368 24	For key No 421
10	0368 24	For key No 455
10	0368 25	For key No 1242 E
10	0368 26	For key No 2433 A
10	0368 27	For key No 3113 A
10	0365 45	Set of two 2433 A keys Other key code: please consult us



Metal keys for rebate locks

10	0365 39	Triangle male 6.5 mm
10	0365 40	Triangle male 8 mm
10	0365 41	Triangle male 9 mm (EDF)
10	0365 42	Double bar



uprights, rails and fixing accessories



For mounting chassis and fixing wiring accessories

Pack	Cat. Nos.	Rails to be cut
10	0374 02	Length 2 m
10	0374 04	EN 60 715
10	0374 07	EN 60 715 depth 7.5 mm depth 15 mm
10	0394 49	45° mounting bracket Set of 2 supports for 45° rail slope Supplied with 4 M6 screws Ø6 mm, nuts and washers
Fixing accessories		
100	NEW 0347 46	On plain plates CBL Z 5.5 x 16 PZ No 3 self-tapping screw
100	NEW 0347 47	CBL Z 5.5 x 19 self-drilling tapping screw
500	0366 44 ¹	On Lina 12.5 plates Rivet reinforced plastic Ø6 mm for drilling Ø6.5 mm
100	0347 45	Screw head H 4.8 x 16 mm self-drilling, self-tapping for Ø3.3 mm
200	0347 50	Screw caps for isolation of screw head Cat. No. 0347 45
On Lina 25 perforated plates		
100	0364 40	Clip-nuts supplied without screw For M4 screws
100	NEW 0364 41	For M5 screws
100	0364 42	For M6 screws
On enclosure frame and crosspieces		
50	NEW 0477 12	Clip-nuts with pins which provide earth continuity For M6 screws
50	NEW 0477 13	For M8 screws

Pack	Cat. Nos.	Fixing accessories (continued)
20	NEW 0364 66	Adaptor For mounting on rail EN 60 715 equipment fitting on rail EN 60 715 Width 17 mm Increase equipment height of 6 mm
100	0364 78	On rails EN 60 715 For M4 screws
100	NEW 0364 79	For M6 screws
10	0044 16	On rails EN 60 715 Claw width 10 mm
50	0044 17	Threaded hole for M4 screw Claw width 17.5 mm Smooth hole 3.8 mm Supplied with fixing screw Ø3.5 mm Length 13 mm
100	NEW 0374 39	Claw width 35 mm Holes for M4 and M6 screws
40	0364 69	Fixomega for M4 screws
Cage nuts		
20	NEW 0364 50	For mounting on square perforation 8.3 x 8.3 mm M4
20	NEW 0364 51	M5
20	NEW 0364 52	M6
50	NEW 0367 75	HF screw with contact washer M 6-10 HF screws with contact washers

1: Can also be used on Lina 25 perforated plate

Download the full file at

<http://assets.kempstoncontrols.com/doc/Atlantic%20New%20IP66%20Metal%20Enclosures.pdf>



KEMPSTON
CONTROLS