


accessories

for Viking 3 terminal blocks - screw connection

TERMINAL BLOCK				INSULATION		BRIDGING COMBS					PROTECTION		MEASURE- MENT	ASSOCIATED PRODUCTS
Nominal cross section (mm ²)	Width (mm)	Colour	Cat. Nos.	End cap	Separation / insulation divider	Comb for 2 blocks, auto. front	Comb for 3 blocks, auto. front	Comb for 10 blocks, auto. front	Comb for 12 blocks, side	Bar for 12 blocks, front	Single pole screen	Cut to length screen	Test meter adaptor	
2-5	5		0371 60	0375 50 ³	0375 60	0375 02	-	0375 01	-	-	0375 65	0375 68	0375 27	<p>End stops p. 126</p>
			0371 00											
			0371 20											
4	6		0371 61	0375 50 ³	0375 60	0375 05	-	0375 04	-	-	0375 65	0375 68	0375 27	<p>Label holder for end stop p. 126</p>
			0371 01											
			0371 21											
			0371 31											
6	8		0371 62	0375 50 ³	0375 60	-	0375 07	-	-	-	0375 66	0375 68	0375 27	<p>End caps p. 126</p>
			0371 78											
10	10		0371 63	0375 50 ³	0375 60	-	-	-	-	0375 40	0375 66	0375 68	-	
16	12		0371 64	0375 51	0375 61	-	-	-	-	0375 42	0375 67	0375 69	-	<p>End caps p. 126</p>
			0371 04											
35	15		0371 65	0375 51	0375 61	-	-	-	-	0375 44	0375 67	0375 69	-	
			0371 05											
70	22		0371 66	built-in	-	-	-	-	-	-	-	-	-	
4	6		0371 69	0375 52	0375 62	0375 05	-	0375 04	-	-	-	-	0375 27	
			0371 09											
2-5	5		0371 67	0375 53	0375 63	0375 02	-	0375 01	-	-	-	-	0375 27 ⁴	
			0371 07											
4	6		0371 68	0375 53	0375 63	0375 05	-	0375 04	-	-	-	-	0375 27 ⁴	<p>Dividers p. 126</p>
			0371 08											
2-5	5		0371 51	0375 54	0375 54	0375 02 ⁴	-	0375 01 ⁴	0375 46 ⁵ 0375 47 ⁵	-	-	-	0375 27 ⁴	
			0371 70											
4	6		0371 71	0375 50 ³	-	-	-	-	-	-	-	-	-	
6	8		0371 72											
10	10		0371 73											
16	12		0371 74	0375 51	-	-	-	-	-	-	-	-	-	<p>Blown fuse indicators p. 127</p>
35	15		0371 75	-	-	-	-	-	-	-	-	-	-	
35	15		0371 76	0375 50	0375 60	0375 05	-	0375 04	-	-	0375 65	0375 68	-	
4	6		0371 77	0375 50	0375 60	-	0375 07	-	-	-	0375 66	0375 68	-	
6	8		0371 78	0375 52	-	-	-	-	-	-	-	-	-	
4	6		0371 79	0375 55	0375 62	0375 05	-	0375 04	-	-	-	-	0375 27	
2-5	6		0371 80	0375 55	0375 62	0375 05	-	0375 04	-	-	-	-	-	<p>Shielding p. 127</p>
			0371 81											
			0371 81 + 0375 24 / 25 ²											
			0371 82											
			0371 83											
			0371 84											
			0371 85											
	0371 86													
10	12		0371 87	0375 55	0375 62	0375 05	-	0375 04	-	-	-	-	0375 27	<p>CAB 3 marking system p. 140</p>
			0371 85											
10	12		0371 87	0375 55	0375 62	0375 05	-	0375 04	-	-	-	-	0375 27	
2-5	5		0371 51	0375 54	0375 54	0375 02 ⁴	-	0375 01 ⁴	0375 46 ⁵ 0375 47 ⁵	-	-	-	0375 27 ⁴	<p>Starfix ferrules p. 148</p>
			0371 52											

Viking 3 terminal blocks – screw connection

for copper cable

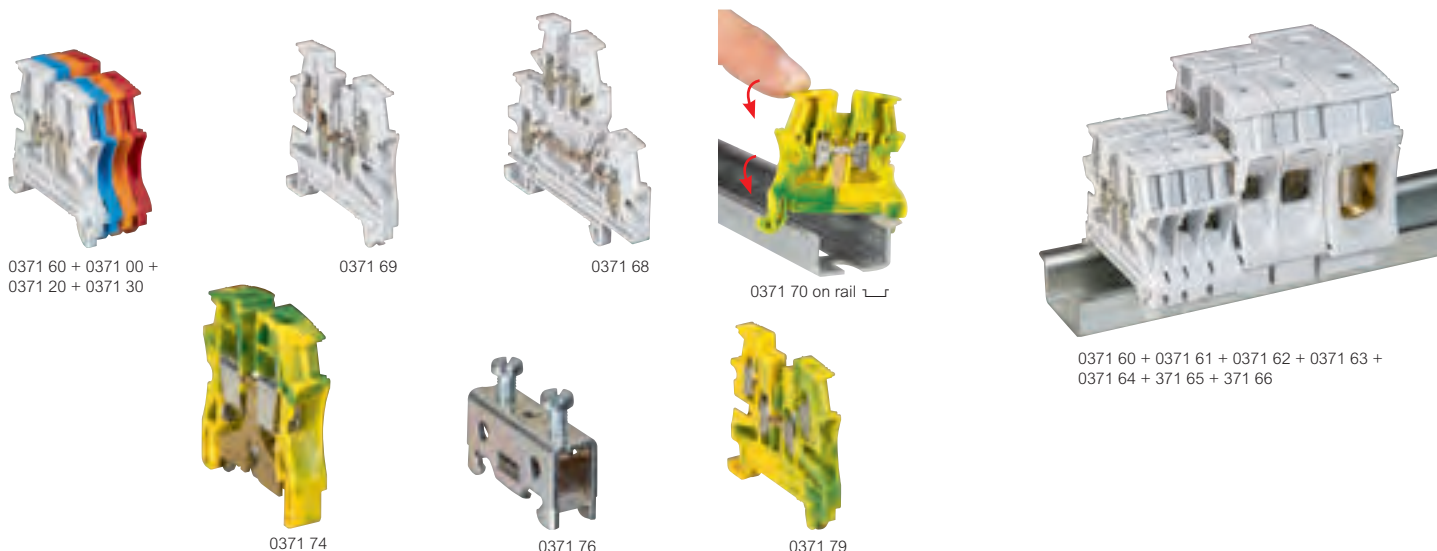

Accessories **p. 126-127**
 Technical characteristics **p. 128-129**

All V2 polyamide UL94 960 °C to IEC EN 60695-2-11
 Compatible with either rigid (0.25 mm² to 95 mm²) or flexible (0.25 mm² to 70 mm²) copper cables
 Facility for 2 bridging combs
 Compatible with rails depth 15 mm and rails EN 60715 depth 7.5 mm and 15 mm
 Range comprises only 2 block heights (2.5 mm² to 10 mm² and 16 mm² to 70 mm²) ensuring a neat installation

Pack	Cat. Nos.	Connection				
		Grey for standard circuit Blue for neutral conductor Orange for circuit not broken by the master isolating device Red for special circuits (safety, protected, etc)				⊕
		1 connection - 1 entry/1 exit				
			Nominal cross section (mm ²)	Capacity		Width (mm)
		Colour	Rigid cable (mm ²)	Flexible cable (mm ²)		
60	0371 60	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5
60	0371 00	Blue ●				
60	0371 20	Orange ●				
60	0371 30	Red ●				
50	0371 61	Grey ●				
50	0371 01	Blue ●				
50	0371 21	Orange ●				
50	0371 31	Red ●				
40	0371 62	Grey ●	6	0.5 to 10	0.25 to 6	8
40	0371 02	Blue ●				
30	0371 63	Grey ●	10	1.5 to 16	2.5 to 10	10
30	0371 03	Blue ●				
20	0371 64	Grey ●	16	1.5 to 25	4 to 16	12
20	0371 04	Blue ●				
20	0371 65	Grey ●	35	2.5 to 50	4 to 35	15
20	0371 05	Blue ●				
10	0371 66 ¹	Grey ●	70	25 to 95	16 to 70	22
		1 connection - 2 entries/2 exits				
25	0371 69	Grey ●	4	0.25 to 6	0.25 to 4	6
25	0371 09	Blue ●				
		2 connections on 2 levels				
60	0371 67	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5
60	0371 07	Blue ●				
60	0371 68	Grey ●	4	0.25 to 6	0.25 to 4	6
60	0371 08	Blue ●				
		3 connections on 3 levels				
50	0371 51 ²	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5

Pack	Cat. Nos.	Protection				
		1 connection - 1 entry/1 exit - metal base Screwless fixing on rail up to 10 mm width PEN from 10 mm ²				⊕
			Nominal cross section (mm ²)	Capacity		Width (mm)
		Colour	Rigid cable (mm ²)	Flexible cable (mm ²)		
60	0371 70	Green/yellow ●	2.5	0.25 to 4	0.25 to 2.5	5
50	0371 71	Green/yellow ●	4	0.25 to 6	0.25 to 4	6
40	0371 72	Green/yellow ●	6	0.5 to 10	0.25 to 6	8
30	0371 73	Green/yellow ●	10	1.5 to 16	2.5 to 10	10
10	0371 74	Green/yellow ●	16	1.5 to 25	4 to 16	12
10	0371 75	Green/yellow ●	35	2.5 to 50	4 to 35	15
		1 connection - bare block - metal base				
10	0371 76	-	35	2.5 to 50	4 to 35	15
		1 connection - 2 entries/2 exits - metal base Screwless fixing on rail				⊕
50	0371 79	Green/yellow ●	4	0.25 to 6	0.25 to 4	6
		1 connection - 1 entry/1 exit - plastic base Can be used for protection conductor inside class II equivalent assemblies				⊕
50	0371 77	Green ●	4	0.25 to 6	0.25 to 4	6
40	0371 78	Green ●	6	0.5 to 10	0.25 to 6	8
		PNE - Phase/Neutral/Earth				
		3 connections on 3 levels - metal base Green/yellow marking for the lower level Screwless fixing on rail				⊕
			Nominal cross section (mm ²)	Capacity		Width (mm)
		Colour	Rigid cable (mm ²)	Flexible cable (mm ²)		
50	0371 52 ²	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5

CAB 3 marking system **p. 140-142**
 Starfix ferrules and crimping tools **p. 148-149**



1 : Built-in end cap
 2 : Cable capacity - 2.5 mm² max. only when used with bridging comb

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



KEMPSTON
CONTROLS