



Figure similar

### MLFB-Ordering data

6SL3210-1KE12-3AF2

Client order no. :

Item no. :

Order no. :

Consignment no. :

Offer no. :

Project :

Remarks :

### Rated data

#### Input

Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -20 %
Line frequency	47 ... 63 Hz
Rated current (LO)	2.90 A
Rated current (HO)	2.50 A

#### Output

Number of phases	3 AC
Rated voltage	400 V
Rated power (LO)	0.75 kW
Rated power (HO)	0.55 kW
Rated current (IN)	2.30 A
Rated current (LO)	2.20 A
Rated current (HO)	1.70 A
Max. output current	3.40 A
Pulse frequency	4.000 kHz
Output frequency for vector control	0 ... 240 Hz
Output frequency for V/f control	0 ... 550 Hz

### Overload capability

#### Low Overload (LO)

150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time

#### High Overload (HO)

200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time

### General tech. specifications

Power factor $\lambda$	0.70 ... 0.85
Offset factor $\cos \varphi$	0.95
Efficiency $\eta$	0.97
Sound pressure level (1m)	49 dB
Power loss	0.04 kW

### Ambient conditions

Cooling Air cooling using an integrated fan

Cooling air requirement 0.005 m<sup>3</sup>/s

Installation altitude 1000 m

### Ambient temperature

Operation -10 ... 40 °C (14 ... 104 °F)

Transport -40 ... 70 °C (-40 ... 158 °F)

Storage -40 ... 70 °C (-40 ... 158 °F)

### Relative humidity

Max. operation 95 % At 40 °C (104 °F), condensation and icing not permissible

### Closed-loop control techniques

V/f linear / square-law / parameterizable Yes

V/f with flux current control (FCC) Yes

V/f ECO linear / square-law Yes

Sensorless vector control Yes

Vector control, with sensor No

Encoderless torque control No

Torque control, with encoder No

### Communication

Communication PROFINET



Figure similar

MLFB-Ordering data

6SL3210-1KE12-3AF2

### Mechanical data

Degree of protection	IP20 / UL open type
Size	F5AA
Net weight	1.40 kg
Width	73.0 mm
Height	173.0 mm
Depth	178.0 mm

### Inputs / outputs

#### Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

#### Fail-safe digital inputs

Number	1
--------	---

#### Digital outputs

Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A

#### Analog / digital inputs

Number	1 (Differential input)
--------	------------------------

#### Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

#### PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy  $\pm 5$  °C

### Standards

Compliance with standards UL, cUL, CE, C-Tick (RCM)

CE marking EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

### Connections

#### Signal cable

Conductor cross-section 0.15 ... 1.50 mm<sup>2</sup> (24 ... 16 AWG)

#### Line side

Version Plug-in screw terminals

Conductor cross-section 1.00 ... 2.50 mm<sup>2</sup> (18 ... 14 AWG)

#### Motor end

Version Plug-in screw terminals

Conductor cross-section 1.00 ... 2.50 mm<sup>2</sup> (18 ... 14 AWG)

#### DC link (for braking resistor)

Version Plug-in screw terminals

Conductor cross-section 1.00 ... 2.50 mm<sup>2</sup> (18 ... 14 AWG)

PE connection On housing with M4 screw


#### Max. motor cable length

Shielded 50 m

Unshielded 100 m

### Converter losses to EN 50598-2\*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-81.03 %

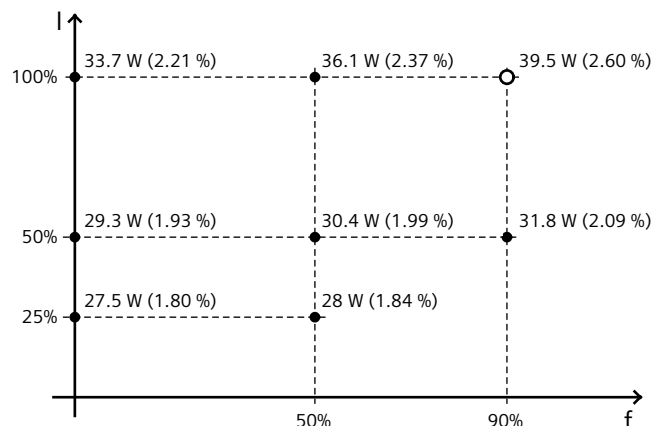

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values