

VARIMETER Current relay BA 9053, MK 9053N




Your Advantages

- Preventive maintenance
- For better productivity
- Quicker fault locating
- Precise and reliable


Features

- According to IEC/EN 60 255, DIN VDE 0435-303, IEC/EN 60 947-1
- to: monitor DC and AC
- BA 9053 with measuring ranges from 2 mA to 25 A
- BA 9053 optionally with 3 measuring ranges 0.1 up to 25 A
- MK 9053N with measuring ranges from 2 mA up to 10 A
- High overload possible
- Input frequency up to 5 kHz
- Galvanic separation between Auxiliary Circuit – measuring circuit
- Auxiliary supply AC/DC; BA 9053 with AC
- BA 9053 optionally with start-up delay (MK = standard)
- with time delay, up to max. 100 sec
- BA 9053 optionally with safe separation to IEC/EN 61 140
- **As option with manual reset**
- MK 9053N optionally with remote potentiometer
- LED indicators for operation and contact position
- MK 9053N as option with pluggable terminal blocks for easy exchange of devices
 - with screw terminals
 - or with cage clamp terminals
- Width MK 9053N: 22.5 mm
- Width BA 9053: 45 mm

Options with Pluggable Terminal Blocks



Screw terminal
(PS/plugin screw)




Cage clamp
(PC/plugin cage clamp)

Notes

Removing the terminal blocks with cage clamp terminals

1. The unit has to be disconnected.
2. Insert a screwdriver in the side recess of the front plate.
3. Turn the screwdriver to the right and left.
4. Please note that the terminal blocks have to be mounted on the belonging plug in terminations.

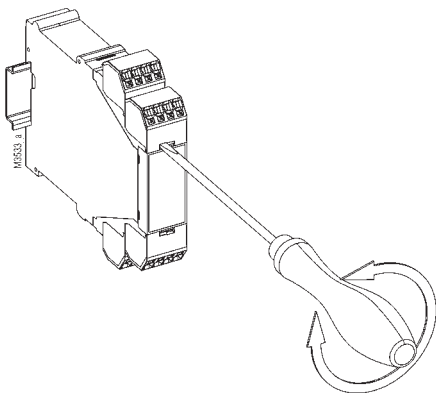

Approvals and Marking



* see variants
1) pending

Applications

Monitoring current in AC or DC systems


Function

The relays measure the arithmetic mean value of the rectified measuring current. The AC units are adjusted to the r.m.s value. They have settings for response value and hysteresis. The units work as overcurrent relays but can also be used for undercurrent detection. The hysteresis is dependent on the response value.


Indicators

green upper LED: on, when auxiliary supply connected
yellow lower LED: on, when output relay activated


Circuit Diagrams

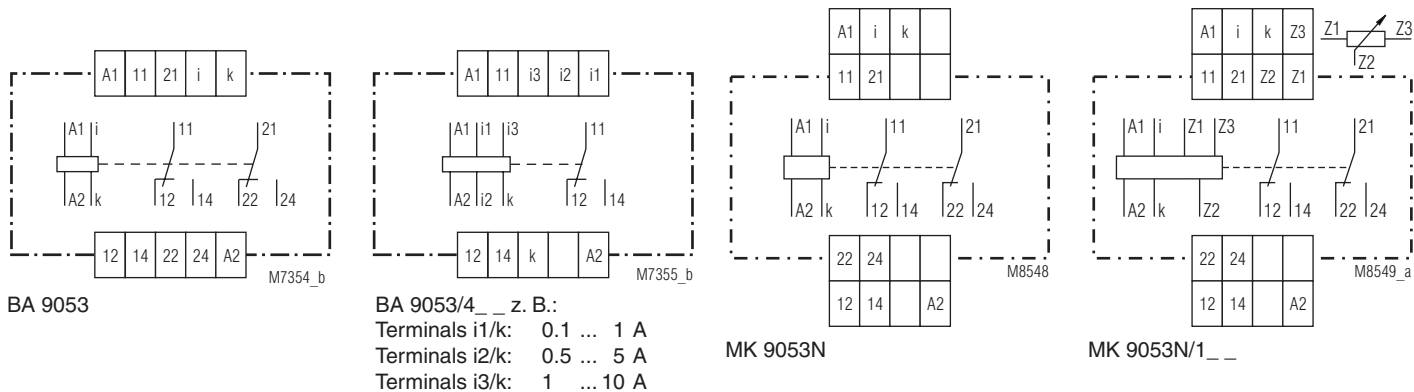

Function Diagram without Start-up Delay

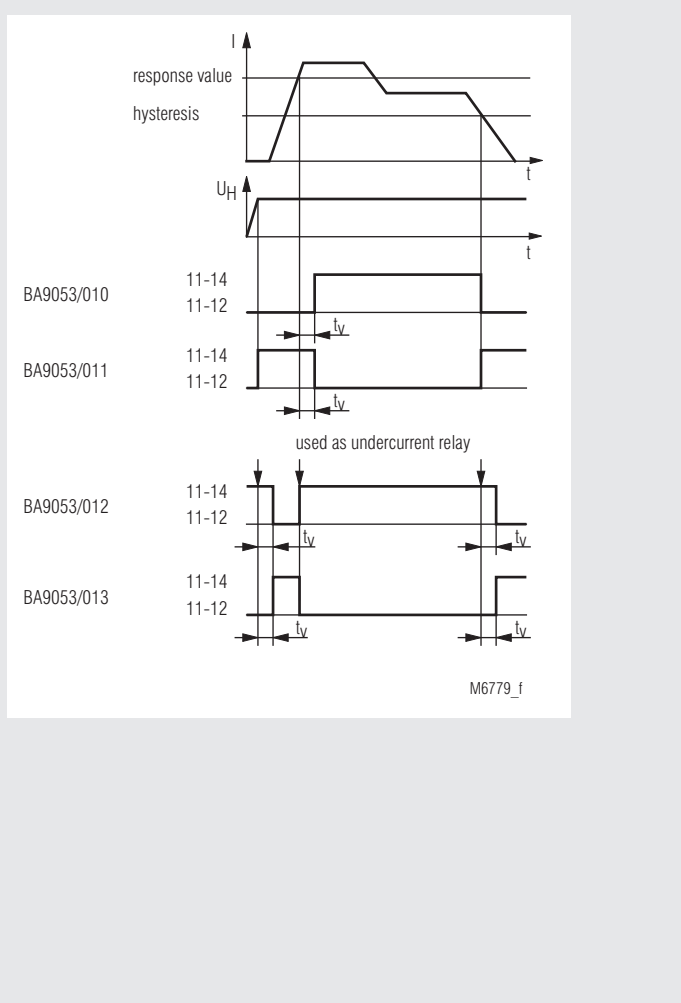

Function Diagram with Start-up Delay

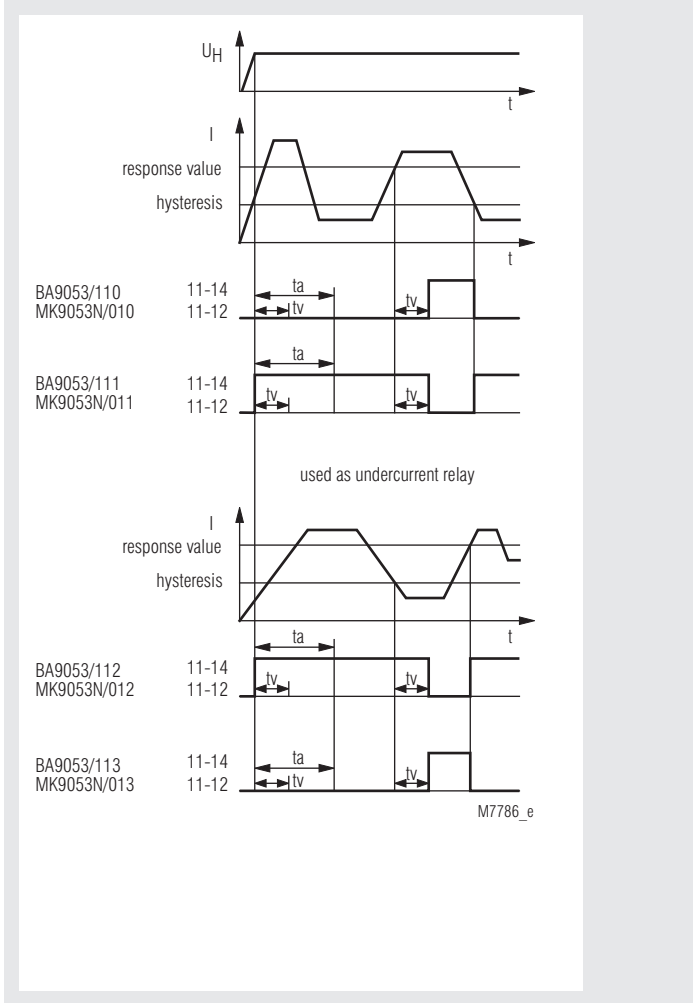

On model BA 9053/6 __ with manual reset the contacts remain in the fault state after detecting a fault or after to has elapsed. The contacts are reset by disconnecting the supply voltage.

Technical Data

Input (i, k)

| BA 9053 for AC and DC | | | | | |
|-------------------------------|---------------|---------------------|---------------------------------|--|---|
| Measuring range ^{*)} | | internal resistance | max. perm. cont. current | | max. permiss. current 3 s On, 100 s Off |
| AC | DC | | Device mounted without distance | | |
| 2 - 20 mA | 1.8 - 18 mA | 1.5 Ω | 0.7 A | | 1 A |
| 20 - 200 mA | 18 - 180 mA | 0.15 Ω | 2 A | | 4 A |
| 30 - 300 mA | 27 - 270 mA | 0.1 Ω | 2.5 A | | 8 A |
| 50 - 500 mA | 45 - 450 mA | 0.1 Ω | 2.5 A | | 8 A |
| 80 - 800 mA | 72 - 720 mA | 40 mΩ | 4 A | | 12 A |
| 0.1- 1 A | 0.09 - 0.9 A | 30 mΩ | 4 A | | 12 A |
| 0.5- 5 A | 0.45 - 4.5 A | 6 mΩ | 10 A | | 30 A |
| 1 - 10 A | 0.9 - 9 A | 3 mΩ | 20 A | | 40 A |
| 1.5- 15 A | 1.35 - 13.5 A | 3 mΩ | 25 A | | 40 A |
| 2 - 20 A | 1.8 - 18 A | 3 mΩ | 25 A | | 40 A |
| 2.5 - 25 A | 2.25 - 22.5 A | 3 mΩ | 25 A | | 40 A |

* DC or AC current 50 ... 5000 Hz
(other frequency ranges of 10 ... 5000 Hz, e.g. 16 2/3 Hz on request)

| BA 9053/4_ _ with 3 measuring ranges: | | | |
|---------------------------------------|-------------------|-------------------|--------------------|
| Range: | Terminals i1/k | Terminals i2/k | Terminals i3/k |
| AC 20 mA / 200 mA / 1A: | AC 2.0 ... 20 mA | AC 20 ... 200 mA | AC 0.1 ... 1 A |
| | DC 1.8 ... 18 mA | DC 18 ... 180 mA | DC 0.09 ... 0.9 A |
| AC 1 / 5 / 10A: | AC 0.1 ... 1 A | AC 0.5 ... 5 A | AC 1.0 ... 10 A |
| | DC 0.09 ... 0.9 A | DC 0.45 ... 4.5 A | DC 0.9 ... 9 A |
| AC 5 / 10 / 25A: | AC 0.5 ... 5 A | AC 1.0 ... 10 A | AC 2.5 ... 25 A |
| | DC 0.45 ... 4.5 A | DC 0.9 ... 9 A | DC 2.25 ... 22.5 A |

| MK 9053N with 1 Measuring range for AC and DC | | | | | |
|--|--------------|---------------------|--------------------------------|--------------------|---|
| Measuring rang ^{*)} | | internal resistance | max. perm. cont. current | | max. permiss. current 3 s On, 100 s Off |
| AC | DC | | Device mount. without distance | with 5 mm distance | |
| 2 - 20 mA | 1.8 - 18 mA | 1.5 Ω | 0.5 A | 0.7 A | 1 A |
| 20 - 200 mA | 18 - 180 mA | 0.15 Ω | 1.5 A | 2 A | 4 A |
| 30 - 300 mA | 27 - 270 mA | 0.1 Ω | 2 A | 2.5 A | 8 A |
| 50 - 500 mA | 45 - 450 mA | 0.1 Ω | 2 A | 2.5 A | 8 A |
| 0.1- 1 A | 0.09 - 0.9 A | 30 mΩ | 3 A | 4 A | 8 A |
| 0.5- 5 A | 0.45 - 4.5 A | 6 mΩ | 8 A | 11 A | 20 A |
| 1 - 10 A | 0.9 - 9 A | 3 mΩ | 12 A | 15 A | 20 A |

* DC or AC current 50 ... 5000 Hz
(Other frequency ranges of 10 ... 5000 Hz, e.g. 16 2/3 Hz on request)

Extending of measuring range:

For DC-current higher then the highest measuring range the voltage relay BA 9054 or MK 9054N measuring range 15 ... 150 mV or 6 ... 60 mV can be used with external Shunt.

For AC current higher then the highest measuring range can be used a current transformer e. g. with secondary winding of 1 A or 5 A together with BA 9053 or MK 9053N. The nominal load of the CT should be ≥ 0.5 VA.

Measuring principle:

arithmetic mean value

Adjustment:

The AC - devices can also monitor DC current. The scale offset in this case is:

$$(I = 0.90 I_{\text{eff}})$$

Temperature influence::

$$< 0.05 \% / K$$

Technical Data

Setting Ranges

Setting

Response value: infinite variable $0.1 I_N \dots 1 I_N$
relative scale

Hysteresis

at AC: infinite variable 0.5 ... 0.98 of setting value
at DC: infinite variable 0.5 ... 0.96 of setting value

Accuracy:

Response value at

Potentiometer right stop (max): $0 \dots + 8 \%$

Potentiometer left stop (min): $- 10 \dots + 8 \%$

Repeat accuracy: $\leq \pm 0.5 \%$

Recovery time

at devices with manual reset

(Reset by braking

of the auxiliary voltage)

BA 9053/6_ _; MK 9053N/6_ _: ≤ 1 s

(dependent to function and auxiliary voltage)

Time delay t_d :

infinite variable at logarithmic scale

from 0 ... 20 s, 0 ... 30 s, 0 ... 60 s, 0 ... 100 s

setting 0 s = without time delay

Start-up delay t_a :

BA 9053/1_ _:

1 ... 20 s; 1 ... 60 s; 1 ... 100 s,

adjustable on logarithmic scale.

t_a is started when the supply voltage

is connected. During elapse of time

the output contact is in good state

MK 9053N:

0.1 ... 20 s; 0.1 ... 60 s; 0.1 ... 100 s

Auxiliary Circuit BA 9053 and MK 9053N

Auxiliary voltage U_H (A1, A2)

BA 9053, Nominal voltages: AC 24, 42, 110, 127, 230, 400 V

Voltage range: $0.8 \dots 1.1 U_H$

Nominal frequency: 50 / 60 Hz

Frequency range: $\pm 5 \%$

Nominal consumption: 2.5 VA

| BA 9053, MK 9053N: | | |
|--------------------|-----------------|--------------------------|
| Nominal voltage | Voltage range | Frequency range |
| AC/DC 24 ... 80 V | AC 18 ... 100 V | 45 ... 400 Hz; DC 48 % W |
| | DC 18 ... 130 V | W $\leq 5 \%$ |
| AC/DC 80 ... 230 V | AC 40 ... 265 V | 45 ... 400 Hz; DC 48 % W |
| | DC 40 ... 300 V | W $\leq 5 \%$ |

| BA 9053 | | |
|-----------------|----------------|-----------------|
| Nominal voltage | Voltage range | Frequency range |
| DC 12 V | DC 10 ... 18 V | battery voltage |

Nominal consumption: 4 VA; 1.5 W at AC 230 V Rel. energized
1 W at DC 80 V Rel. energized

Output

Contacts

BA 9053: 2 changeover contacts

MK 9053N: 2 changeover contacts

Thermal current I_{th} : 2 x 5 A or 1 x 8 A

Switching capacity

to AC 15:

NO contact: 3 A / AC 230 V IEC/EN 60 947-5-1

NC contact: 1 A / AC 230 V IEC/EN 60 947-5-1

Electrical life IEC/EN 60 947-5-1

BA 9053

to AC 15 at 3 A, AC 230 V: 5×10^5 switching cycles

MK 9053N:

to AC 15 at 3 A, AC 230 V: 10^5 switching cycles

Short-circuit strength

max. fuse rating: 6 AgL IEC/EN 60 947-5-1

Mechanical life

BA 9053: 50×10^6 switching cycles

MK 9053N: 30×10^6 switching cycles

Technical Data

General Data

Operating mode: Continuous operation

Temperature range:

BA 9053:
 ≤ 10 A: - 40 ... + 60°C
 ≥ 15 A: - 40 ... + 50°C
 MK 9053N: - 20 ... + 50°C

Clearance and creepage distances

rated impuls voltage /
 pollution degree
 BA 9053 meas. range ≤ 10 A: 6 kV / 2 IEC 60 664-1
 BA 9053 meas. range ≥ 15 A: 4 kV / 2 IEC 60 664-1
 MK 9053N: 4 kV / 2 IEC 60 664-1

EMC

Electrostatic discharge: 8 kV (air) IEC/EN 61 000-4-2
 HF irradiation: 10 V/m IEC/EN 61 000-4-3
 Fast transients: 4 kV IEC/EN 61 000-4-4
 Surge voltages
 between
 wires for power supply: 2 kV IEC/EN 61 000-4-5
 between wire and ground: 4 kV IEC/EN 61 000-4-5
 Interference suppression: Limit value class B EN 55 011

Degree of protection

Housing: IP 40 IEC/EN 60 529
 Terminals: IP 20 IEC/EN 60 529

Housing:

Thermoplastic with V0 behaviour
 according to UL subject 94

Vibration resistance:

Amplitude 0.35 mm IEC/EN 60 068-2-6
 frequency 10 ... 55 Hz

Climate resistance

BA 9053
 ≤ 10 A: 40 / 060 / 04 IEC/EN 60 068-1
 ≥ 15 A: 40 / 050 / 04 IEC/EN 60 068-1
 MK 9053N: 20 / 060 / 04 IEC/EN 60 068-1
Terminal designation: EN 50 005

Wire connection

BA 9053: 2 x 2.5 mm² solid or
 2 x 1.5 mm² stranded wire with sleeve

MK 9053N:

Screw terminals

(integrated): 1 x 4 mm² solid or
 1 x 2.5 mm² stranded ferruled (isolated) or
 2 x 1.5 mm² stranded ferruled (isolated)
 or 2 x 2.5 mm² solid

Insulation of wires

or sleeve length: 8 mm

Plug in with screw terminals

max. cross section
 for connection: 1 x 2.5 mm² solid or
 1 x 2.5 mm² stranded ferruled (isolated)

Insulation of wires

or sleeve length: 8 mm

Plug in with cage clamp terminals

max. cross section
 for connection: 1 x 4 mm² solid or
 1 x 2.5 mm² stranded ferruled (isolated)

min. cross section

for connection: 0.5 mm²

Insulation of wires

or sleeve length: 12 ±0.5 mm

Wire fixing:

BA 9053: Flat terminals with self-lifting
 clamping piece IEC/EN 60 999-1
 MK 9053N: Plus-minus terminal screws M3.5 box
 terminals with wire protection
 or cage clamp terminals

DIN-rail IEC/EN 60 715

Mounting:

Weight
 BA 9053: AC-device: 280 g
 AC/DC-device: 200 g

MK 9053N: 150 g

Dimensions

Width x height x depth

BA 9053: 45 x 75 x 120 mm
 MK 9053N: 22.5 x 90 x 97 mm

Standard Types

BA 9053/010 AC 0.5 ... 5 A AC 230 V
 Article number: 0053128 on stock
 • for Overcurrent monitoring
 • Measuring range: AC 0.5 ... 5 A
 • Auxiliary voltage U_H : AC 230 V
 • Time delay by I_{an} : 0 ... 20 s
 • Width: 45 mm

BA 9053/012 AC 0.5 ... 5 A AC 230 V
 Article number: 0053192 on stock
 • for Overcurrent monitoring
 • Measuring range: AC 0.5 ... 5 A
 • Auxiliary voltage U_H : AC 230 V
 • Time delay by I_{ab} : 0 ... 20 s
 • Width: 45 mm

MK 9053N.12/010 AC 0.5 ... 5 A AC/DC 80 ... 230 V t_v 0 ... 20 s t_a 0.1 ... 20 s
 Article number: 0063176 on stock
 • for Overcurrent monitoring
 • Measuring range: AC 0.5 ... 5 A
 • Auxiliary voltage U_H : AC/DC 80 ... 230 V
 • Time delay by t_v : 0 ... 20 s
 • Start up delay t_a : 0.1 ... 20 s
 • Width: 22.5 mm

Variants

BA 9053/_11: same as BA 9053/010 but with inverted
 relay output (see Function Diagram)

BA 9053/_13*: same as BA 9053/012 but with inverted
 relay output (see Function Diagram)

BA 9053/61: with time delay by I_{ab}
 with UL approval, only with 1 current
 range up to 10 A, U_H max. AC 120 V
 standard version without options

BA 9053/0__:

BA 9053/1__ to BA 9053/6__

BA 9053/1__:
 BA 9053/2__:
 with start-up delay t_a
 with safe electrical separation of
 input- and output circuit, according to
 DIN/EN 61140;

Measuring range up to ≤ 10 A: **DIN/EN 60947-1; 4 kV/2 in relation
 of overvoltage category III with
 basic insulation to DIN/EN 60664-1
 of 4 kV;**

Measuring range up to ≥ 15 A: **overvoltage category II with basic
 insulation to 2.5kV**

BA 9053/3__:
 BA 9053/4__:
 with 5 µm gold plated contacts
 with 3 measuring ranges,
 1 changeover contact

BA 9053/431:
 with safe separation, 3 current ranges
 up to 10 A, 1 changeover contact

with forcibly guided contacts

BA 9053/5__:
 MK 9053N/_11:
 with time delay by I_{an}

MK 9053N/_13*:
 with time delay by I_{ab}

MK 9053N/0__:
 standard version without remote
 potentiometer


MK 9053N/1__:
 connection of remote potentiometer
 for 470 kΩ,

**at this version there is no
 potentiometer for the response value**
 with manual reset, resetting by
 disconnecting the power supply


* The units BA 9053/_13, MK 9053N/_13 are normally used for undercur-
 rent. The delay t_v starts when the current drops under the hysteresis value.

Ordering example for variants

BA 9053 / AC 1 ... 10 A AC 24 V 0 ... 20 s 1 ... 100 s

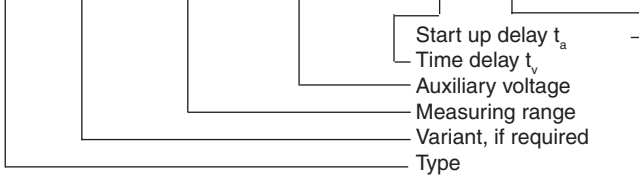

MK 9053N / AC 0.1 ... 1 A AC 230 V 0 ... 20 s 0.1 ... 20 s

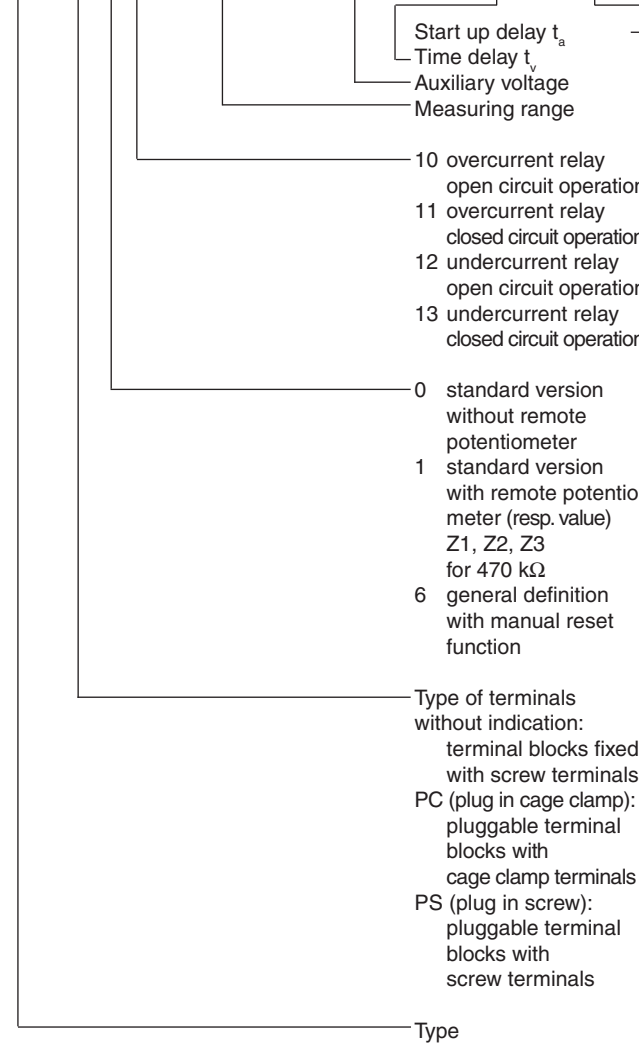

Accessories

AD 3: Remote potentiometer 470 kΩ (article number 0050174)

Geräteinstellung

Example:
Current relay BA 9053 / MK 9053N AC 0.5 ... 5 A

AC according to type plate:
i.e. the unit is calibrated for AC
0.5 ... 5 A = measuring range

Response value AC 3 A
Hysteresis AC 1.5 A

Settings:
upper potentiometer: 0.6 (0.6 x 5 = 3 A)
lower potentiometer: 0.5 (0.5 x 3 = 1.5 A)


The AC - devices can also monitor DC current. The scale offset in this case is: $\bar{I} = 0.90 \times I_{\text{eff}}$

AC 0.5 ... 5 A is equivalent to DC 0.45 ... 4.5 A

Response value DC 3 A
Hysteresis DC 1.5 A

Settings:
upper potentiometer: 0.66 (0.66 x 4.5 = 3 A)
lower potentiometer: 0.5 (0.5 x 3 = 1.5 A)

Characteristics

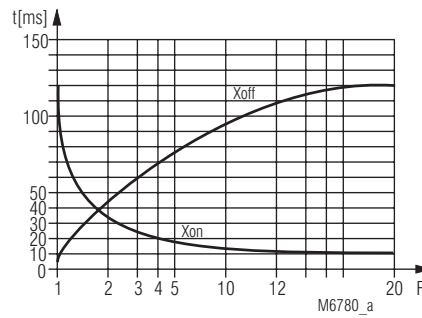

Switching delay

The characteristic shows the switching delay depending on the values of $X_{\text{on}} - X_{\text{off}}$ when switching the current on or off. A slow current change reduces the delay

$$F = \frac{I_{\text{applied}}}{I_{\text{setting}}}$$

