

Datasheet - SRB 302X3-24V-230V

Guard door monitors and Safety control modules for
Emergency Stop applications / General Purpose safety
controllers (Series PROTECT SRB) / SRB 302X3



Preferred typ



- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
- 3 safety contacts, STOP 0
- 2 Signalling outputs

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	SRB 302X3-24V-230V
Article number	1182731
EAN code	4030661318158


Approval

Approval




Classification

Standards	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL	up e (STOP 0)
Control category	up 4 (STOP 0)
DC	99% (STOP 0)
CCF	> 65 points
PFH value	$\leq 2,0.0 \times 10^{-8}/h$ (STOP 0)

SIL	up 3 (STOP 0)
Mission time	20 Years
- notice	The PFH value is applicable for the combinations listed in the table for contact load (K) (current through enabling paths) and switching cycle number (n-op/y). In case of 365 operating days per year and a 24-hour operation, this results in the specified switching cycle times (t-cycle) for the relay contacts. Diverging applications on request.
	

Global Properties

Product name	SRB 302X3
Standards	IEC/EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508
Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-78
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	, self-cleaning, positive action
Weight	200 g
Start conditions	Automatic or Start button (Optional monitored)
Start input (Y/N)	Yes
Feedback circuit (Y/N)	Yes
Start-up test (Y/N)	No
Reset after disconnection of supply voltage (Y/N)	
Automatic reset function (Y/N)	Yes
Reset with edge detection (Y/N)	Yes
Pull-in delay	
- ON delay with reset button	20 ms
Drop-out delay	
- Drop-out delay in case of power failure	60 ms
- Drop-out delay in case of emergency stop	≤ 20 ms

Mechanical data

Connection type	Screw connection
Cable section	
- Min. Cable section	0,25 mm ²
- Max. Cable section	2.5 mm ²
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6 Nm
Detachable terminals (Y/N)	No
Mechanical life	10.000.000 operations
Electrical lifetime	Derating curve available on request
restistance to shock	30 g / 11 ms
Resistance to vibration To EN 60068-2-6	10...55 Hz, Amplitude 0,35 mm

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+60 °C
Storage and transport temperature	
- Min. Storage and transport temperature	-40 °C
- Max. Storage and transport temperature	+85 °C
Protection class	
- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U_{imp}	4 kV
- Overvoltage category	III To VDE 0110
- Degree of pollution	2 To VDE 0110

Electromagnetic compatibility (EMC)

EMC rating	conforming to EMC Directive
------------	-----------------------------

Electrical data

Rated DC voltage for controls	
- Min. rated DC voltage for controls	20.4 V
- Max. rated DC voltage for controls	28.8 V
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	20.4 V ... 195.5 V
- Max. rated AC voltage for controls, 50 Hz	26.4 V ... 253 V
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	20.4 V ... 195.5 V
- Max. rated AC voltage for controls, 60 Hz	26.4 V ... 253 V
Contact resistance	max. 100 mΩ
Power consumption	2.5 W; 5 VA
Type of actuation	AC
Rated operating voltage U_e	230 VAC -15% / +10% 24 VDC -15% / +20%, residual ripple max. 10% 24 VAC -15% / +10%
Operating current I_e	
Frequency range	50 / 60 Hz
Electronic protection (Y/N)	Yes
Fuse rating for the operating voltage	Internal electronic trip, tripping current > 1.0 A
Current and tension on control circuits	
- S11, S12	24 VDC, Test current: 80 mA
- S21, S22	24 VDC, Test current: 40 mA, Start pulse: 450 mA / 5 ms
- S31, S32	24 VDC, Test current: 40 mA
- S13, S14	24 VDC, Start pulse: 150 mA / 20 ms
- S33, S34	24 VDC, Start pulse: 200 mA / 5 ms
Bridging in case of voltage drops	50 ms

Inputs

Monitored inputs

- Short-circuit recognition (Y/N)	optional
-----------------------------------	----------

- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Number of shutters	0 piece
Number of openers	2 piece
Cable length	1500 m with 1.5 mm ² ; 2500 m with 2.5 mm ²
Conduction resistance	max. 40 Ω

Outputs

Stop category	0
Number of safety contacts	3 piece
Number of auxiliary contacts	2 piece
Number of signalling outputs	0 piece
Switching capacity	
- Switching capacity of the safety contacts	max. 250 VAC, 8 A ohmic (inductive in case of appropriate protective wiring)
- Switching capacity of the auxiliary contacts	41-42: 24 VDC, 2 A Y31-Y32: 500 mA slow blow
Fuse rating	
- Protection of the safety contacts	8 A slow blow
- Fuse rating for the auxiliary contacts	2 A slow blow
Utilisation category To EN 60947-5-1	AC-15: 230 V / 6 A DC-13: 24 V / 6 A
Number of undelayed semi-conductor outputs with signaling function	0 piece
Number of undelayed outputs with signaling function (with contact)	2 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	0 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	3 piece
Number of secure, delayed semi-conductor outputs with signaling function	0 piece
Number of secure, delayed outputs with signaling function (with contact).	0 piece

LED switching conditions display

LED switching conditions display (Y/N)	Yes
Number of LED's	3 piece
LED switching conditions display	
- The integrated LEDs indicate the following operating states.	
- Position relay K1	
- Position relay K2	
- Supply voltage U _B	

Miscellaneous data

Applications



Emergency-Stop button



Guard system



Pull-wire emergency stop switches



Safety light curtain

Dimensions

Dimensions

- Width	45 mm
- Height	100 mm
- Depth	121 mm

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

2 channel control shown for a guard-door monitor with two contacts, of which at least one contact has positive break, with external reset button (R).

Relay outputs: Suitable for 2 channel control, for increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

(H2) = Feedback circuit

The control recognises cross-short, cable break and earth leakages in the monitoring circuit.

The wiring diagram is shown with guard doors closed and in de-energised condition.

Documents

Operating instructions and Declaration of conformity (de) 1 MB, 01.07.2010

Code: mrl_srb_302x3_de

Operating instructions and Declaration of conformity (jp) 1 MB, 19.07.2011

Code: mrl_srb_302x3_jp

Operating instructions and Declaration of conformity (fr) 1 MB, 19.07.2011

Code: mrl_srb_302x3_fr

Operating instructions and Declaration of conformity (nl) 771 kB, 07.02.2011

Code: mrl_srb_302x3_nl

Operating instructions and Declaration of conformity (en) 967 kB, 21.01.2010

Code: mrl_srb_302x3_en


Wiring example (99) 18 kB, 04.08.2008

Code: ksr3115

BG-test certificate (de) 62 kB, 05.10.2006

Code: z_302p01

Images

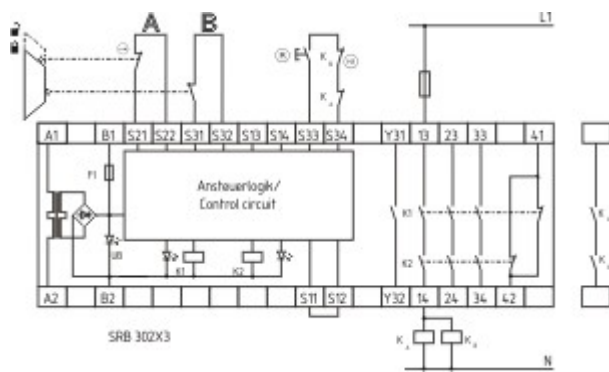

Wiring example

K.A. Schmersal GmbH, Möddinghofe 30, D-42279 Wuppertal
 The data and values have been checked thoroughly. Technical modifications and errors excepted.
 Generiert am 28.09.2011 - 14:12:19h Kasbase 1.5.5 DBI