Effective October 2017 Supersedes July 2015



P20 BS88 Special tags fuse links

Product description

Eaton's Bussmann® series P20 British Standard fuse links are specifically designed for the protection of general industrial applications e.g. power distribution and cable protection.

Standard features

- Good peak let-through current limitation
- 1:1:6 Selective coordination ratio between "minor" and "major" fuse
- gG characteristics for cable protection and general purpose applications
- Power loss values well within the limits of IEC 60269-2



Catalogue symbol:

- 355P20
- 400P20

Technical data:

• Rated voltage: 690 V a.c. / 400 V d.c.

• Rated current: 355 and 400 A

• Breaking capacity: 80 kA a.c. / 40 kA d.c.

• Breaking range and utilisation category: gG

Standards/approvals:

- BS88-1
- IEC 60269-1
- RoHS compliant


Packaging:

• MOQ: 1


Table 1. Technical data

		Rated	Energy integrals I²t (A²S)				Watts loss	
Part number	Rated voltage	current (Amps)	Pre- arcing	Total at 415V	Total at 550V	Total at 660V	w	Product Class
355P20	690 V a.c. / 400 V d.c.	355	490,000	870,000	1,250,000	2,450,000	28	gG
400P20	690 V a.c. / 400 V d.c.	400	670,000	1,200,000	1,700,000	3,350,000	32	gG

Dimensions - mm

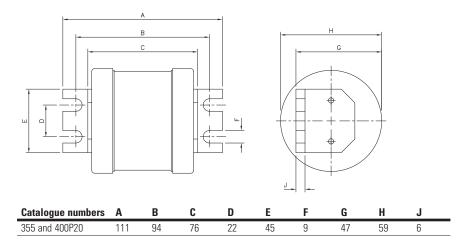


Time current curve

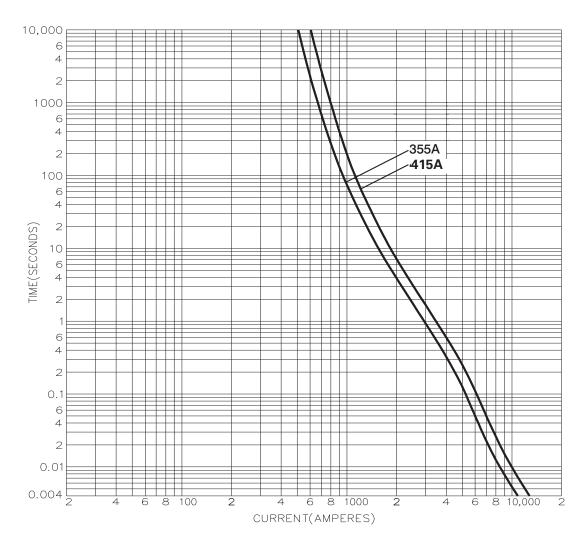

Eaton EMEA Headquarters Route de la Longeraie 7 1110 Morges, Switzerland

Eaton Electrical Products Limited Melton Road Burton-on-the-Wolds Leicestershire, LE12 5TH United Kingdom

© 2017 Eaton All Rights Reserved PDF Only Publication No. 4167 October 2017





All other trademarks are property of their respective owners.

