


# cylindrical cartridge fuses

## HRC (continued)

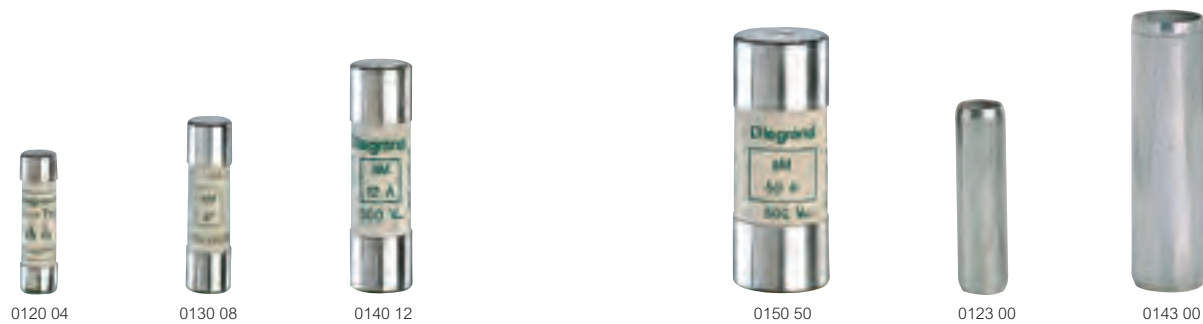

Dimensions p. 79

Numbers refer to physical size of fuse i.e. 10 x 38 means Ø 10 mm x 38 mm length

Pack	Cat. Nos.	Cylindrical type aM (motor rated)		
		Conform to BS EN 60269-1 (BS 88) IEC 60269-1 Bureau Veritas approved		
		Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
	Without indicator	<b>8 x 32</b>		
10	0120 02	2	400	20 000
10	0120 04	4		
10	0120 06	6		
10	0120 10	10		
		HRC (high rupturing capacity) Conform to BS EN 60269-1 and IEC 60269-1, 2 and 2-1 Bureau Veritas approved		
	Without indicator	<b>10 x 38 HRC</b>		
10	0130 95	0.5	500	100 000
10	0130 01	1		
10	0130 02	2		
10	0130 04	4		
10	0130 06	6		
10	0130 08	8		
10	0130 10	10		
10	0130 12	12		
10	0130 16	16		
10	0130 20 <sup>1</sup>	20		
10	0130 25 <sup>1</sup>	25	400	
	Without striker	<b>14 x 51 HRC</b>		
10	0140 04	4	500	100 000
10	0140 06	6		
10	0140 10	10		
10	0140 12	12		
10	0140 16	16		
10	0140 20	20		
10	0140 25	25		
10	0140 32	32		
10	0140 40	40		
10	0140 45 <sup>2</sup>	45		
10	0140 50 <sup>2</sup>	50	400	

Pack	Cat. Nos.	Cylindrical type aM (motor rated) (continued)		
		HRC (high rupturing capacity) Conform to BS EN 60269-1 (BS 88) IEC 60269-1, 2 and 2-1 Bureau Veritas approved		
		Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
	Without striker	<b>22 x 58 HRC</b>		
10	0150 32	32	500	100 000
10	0150 40	40		
10	0150 50	50		
10	0150 63	63		
10	0150 80	80		
10	0150 96	100		
10	0150 97 <sup>2</sup>	125		
		<b>Neutral links</b>		
10	0123 00	8 x 32		
10	0133 00	10 x 38		
10	0143 00	14 x 51		
10	0153 00	22 x 58		

1 : Overrating not described by standards  
2 : Overrating described by standards

# HRC blade type cartridge fuses

gG/aM type



Dimensions p. 79

Pack	Cat. Nos.	Type gG (IEC)/gL (VDE)		
		HRC (high rupturing capacity) Conform to BS EN 60269-1 and 2, IEC 60269-1,2 and 2-1, VDE 0636-21 Bureau Veritas approved Fully insulated end plate and handle lugs		
	With indicator	Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
	<b>Size 00</b>			
10	0163 18	25	500	120 000
10	0163 20	32		
10	0163 25	40		
10	0163 30	50		
10	0163 35	63		
10	0163 40	80		
10	0163 45	100		
10	0163 50	125		
10	0163 55	160		
	<b>Size 0</b>			
3	0168 45	100	500	120 000
3	0168 50	125		
3	0168 55	160		
3	0168 60 <sup>1</sup>	200		
	<b>Size 1</b>			
3	0173 50	125	500	120 000
3	0173 55	160		
3	0173 60	200		
3	0173 65	250		
	<b>Size 2</b>			
3	0178 60	200	500	120 000
3	0178 65	250		
3	0178 70	315		
3	0178 75	400		

Pack	Cat. Nos.	Type aM (motor rated)		
		HRC (high rupturing capacity) Conform to BS EN 60269-1 and 2, IEC 60269-1,2 and 2-1, VDE 0636-21 Bureau Veritas approved Fully insulated end plate and handle lugs		
	With indicator	Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
	<b>Size 00</b>			
3	0160 25	40	500	120 000
3	0160 30	50		
3	0160 35	63		
3	0160 40	80		
3	0160 45	100		
3	0160 50	125		
	<b>Size 0</b>			
3	0165 35	63	500	120 000
3	0165 40	80		
3	0165 45	100		
3	0165 50	125		
3	0165 55	160		
	<b>Size 1</b>			
3	0170 50	125	500	120 000
3	0170 55	160		
3	0170 60	200		
3	0170 65	250		
	<b>Size 2</b>			
3	0175 60	200	500	120 000
3	0175 65	250		
3	0175 70	315		

### Neutral blades

1	0168 04	Size 0
1	0173 04	Size 1
1	0178 04	Size 2
1	0181 04	Size 3

### Handle

5	0199 02	Removable handle for all sizes
---	---------	--------------------------------

1 : Overrating not described by standards

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



**KEMPSTON**  
CONTROLS