

Rittal – The System.

Faster – better – everywhere.

► Section for cable entry, rear for TS, SE, CM, TP – TS 8802.165

Date : Apr 12, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Section for cable entry, rear for TS, SE, CM, TP – TS 8802.165

created: 12.04.2019 build on www.rittal.com/uk-en

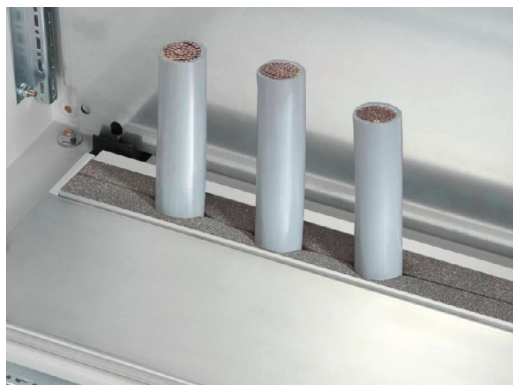

Product description

Description:	For sealing the cable entry at the base opening.
Benefits:	Particularly well-suited to cables with identical cross-sections When installing the mounting plate in the rearmost position, the cables may be routed directly with no large radii.
Applications:	Mount directly on the base opening/base tray and gland plate
Material:	Extruded aluminium section Foam rubber cable clamp strip: PU foam
Technical specifications:	Foam rubber cable clamp strip: Cross-section: 30 x 25 mm
Protection category IP to IEC 60 529:	IP 55 if installed correctly
Supply includes:	Plug-in sections, incl. foam rubber clamp strip
Note:	2 pc(s). are sufficient for one base opening up to an enclosure width of 800 mm From an enclosure width of 1000 mm, two base openings are provided. 4 packs per enclosure may be fitted

Product features

To fit:	Enclosure type: TS 8 Enclosure type: CM Enclosure type: TP Width: = 1600 mm
----------------	--

Weight/pack: 0.6 kg

ETIM 5.0: EC002624

eCl@ss 8.0/8.1: 27189265

eCl@ss 6.0/6.1: 27400604

Product description: TS Section for cable entry, rear, for TS, SE, CM, TP, for W: 1600 mm

Approvals

Certificates: EAC
