

# Motor data sheet


## M3BP 80 MLE 4

Definition	Data	Unit	Remarks
Product code	3GBP 082 450-**L		
Voltage code	S		
Type/Frame	M3BP 80 MLE 4		
Design	CENELEC		
Efficiency class	IE3		
Rated output $P_N$	0.75	kW	
Rated voltage $U_N$	400	V D	± 5 % (IEC 60034-1)
Rated frequency $f_N$	50	Hz	± 2 % (IEC 60034-1)
Rated speed $n_N$	1448	r/min	
Rated current $I_N$	1.7	A	
Starting current $I_S/I_N$	7.4		
Nominal torque $T_N$	4.9	Nm	
Locked rotor torque $T_l/T_N$	3.5		
Maximum torque $T_b/T_N$	4		
Efficiency - full load 100%	82.5	%	Acc. to IEC 60034-2-1
Efficiency - 75%	82.5	%	
Efficiency - 50%	80.3	%	
Power factor - full load 100%	0.78		
Bearing DE/NDE	6204-2Z/C3 6203-2Z/C3		
Sound pressure level $L_{pA}$ dB	50	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm <sup>2</sup>	0	kg-m <sup>2</sup>	
Weight	22	kg	

# Motor data sheet

## M3BP 80 MLE 4

### Running performance chart

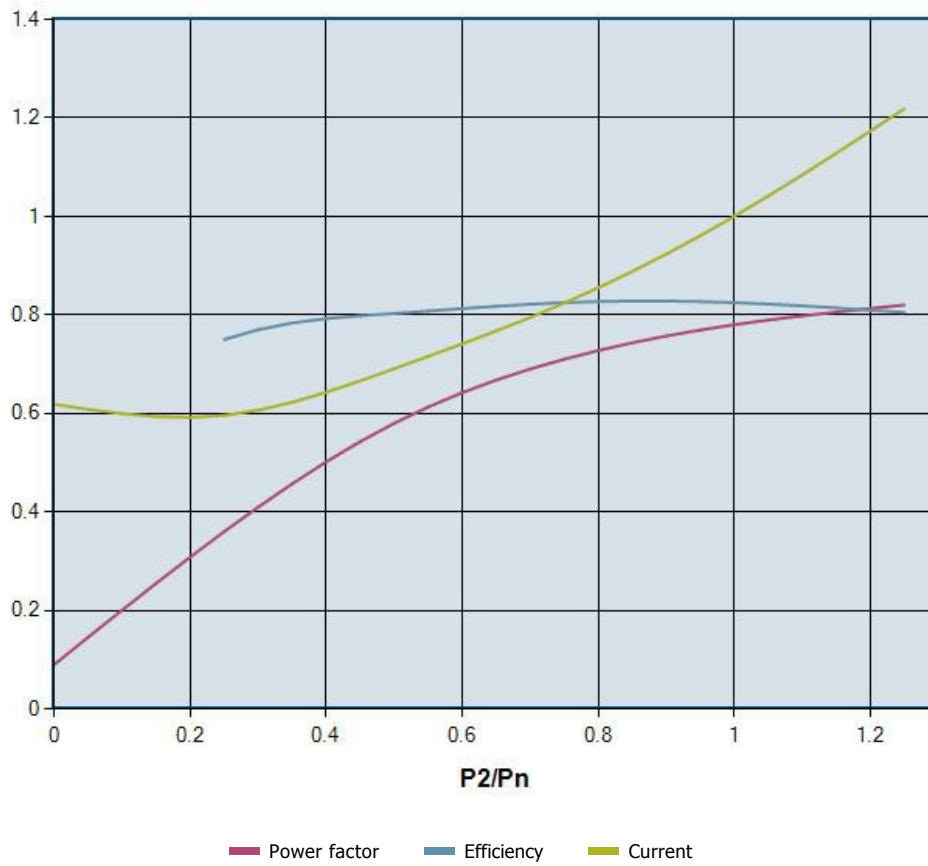

# Motor data sheet

## M3BP 80 MLE 4

### Starting performance chart information

