

## DW-AD-402-M5

Application Type	Standard
Rated operating distance sn	0.8 mm
Mounting	Embeddable
Hysteresis	≤ 20 % sr (10 % typ.)
Repeat accuracy norm	≤ 5 % sr
Supply voltage range UB	10 ... 30 VDC
Permissible ripple content	≤ 20 % UB
Output current	≤ 200 mA
Voltage drop	≤ 2 V
No-load supply current	≤ 10 mA
Off-state current	≤ 0.1 mA
Switching frequency	≤ 5000 Hz
LED	Built-in
Ambient temperature range TA	-25 ... +70 °C
Ambient temperature range TA US	-13 ... +158 °F
Temperature drift of sr	≤ 10 %
Short-circuit protection	built-in
Polarity reversal protection	Built-in
Power on reset	Built-in
Degree of protection	IP 67
Housing material	Stainless-steel V2A
Connection	Cable



More information  
Doc PDF




CAD Download

## Details

Image



Drawing




## Options

Commercial offices

## Technical document(s)

- Dimensional drawing

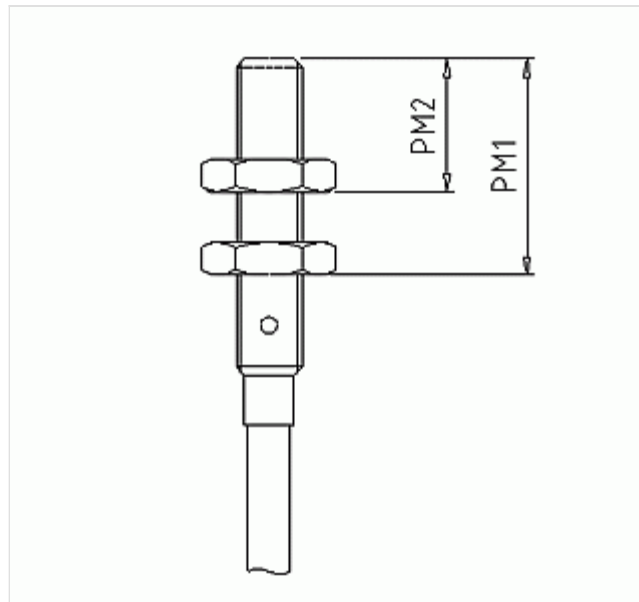

Nut position PM1

mm

Configuration step 2/3

[Contact us](#)

Powered by [TraceParts S.A.](#) © Copyright 1990-2013. All rights reserved. [General Terms of Use](#)