

# Synergy® traditional switches and dimmers



7330 00




7332 02



7330 46



7332 47

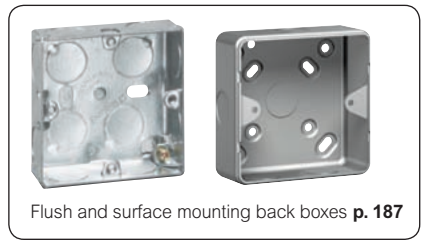

Flush and surface mounting back boxes p. 187



7330 06



7332 07



7330 09



7332 09

Brushed stainless steel front plates : brushed stainless steel with clear epoxy satin lacquer coating  
 Polished stainless steel front plates : electroplated stainless steel plate with trivalent chrome for mirror finish  
 White interiors and rockers  
 Terminal screws captive and backed off ready for cabling

Pack	Cat. Nos.		Stainless steel Brushed   Polished	Single pole plate switches 10 AX - 250 V~	Conform to BS EN 60669-1 : 2000 Flush mounting back box : min. 16 mm deep Nominal plate dimensions : 1, 2 and 3 gang - 86 x 86 mm 4 and 6 gang - 86 x 146 mm
1	7330 00	7332 00			
1	7330 01	7332 01		1 gang - 2 way	
1	7330 05	7332 05		1 gang - intermediate	
1	7330 02	7332 02		2 gang - 2 way	
1	7330 03	7332 03		3 gang - 2 way	
1	7330 04	7332 04		4 gang - 2 way	
1	7330 06	7332 06		6 gang - 2 way	

Pack	Cat. Nos.		Stainless steel Brushed   Polished	Single pole plate switches 20 AX - 250 V~	Conform to BS EN 60669-1 : 2000 Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm
1	7331 31	7333 31			
1	7331 32	7333 32		2 gang - 2 way	
1	7331 33	7333 33		3 gang - 2 way	

Pack	Cat. Nos.		Stainless steel Brushed   Polished	Single pole push switches 10 A - 250 V~	Conform to BS EN 60669-1 : 2000 Flush mounting back box : min. 16 mm deep Nominal plate dimensions : 86 x 86 mm
1	7330 07	7332 07			

Pack	Cat. Nos.		Stainless steel Brushed   Polished	Dimmer units - 230 V~	Conform to BS EN 60669-2-1 : 2000 and BS EN 55015 Not suitable for fluorescent load Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm Dimmers for use with tungsten filament lamps, GU10 halogen lamps and low voltage systems using appropriate transformer
1	7330 46	7332 46			
1	7330 47	7332 47		2 gang - 2 way 50 Hz 40 W-250 W push on/off rotary	

Pack	Cat. Nos.		Stainless steel Brushed   Polished	Dimmer units - 230 V~ - electronic type	Conform to BS EN 60669-2-1 : 2000 and BS EN 55015 Not suitable for fluorescent load Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm Dimmers for use with tungsten filament lamps, good quality wire-wound transformers for low voltage loads
1	7331 56	7333 56			
1	7331 57	7333 57		2 gang - 2 way 50-60 Hz 40 W-400 W push on/off rotary	

Pack	Cat. Nos.		Stainless steel Brushed   Polished	3 pole fan switches 10 A - 250 V~	Conform to BS EN 60669-1 : 2000 With integrated padlockable safety block in OFF position Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm
1	7330 09	7332 09			

# Synergy® traditional socket outlets




7330 70



7332 61



7330 97

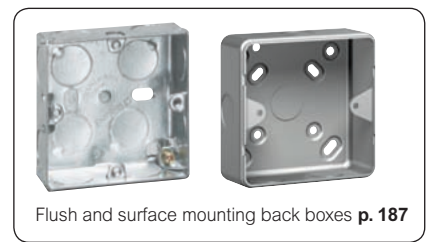

Flush and surface mounting back boxes p. 187



7330 71



7332 74



7330 89



7332 59



Red LED power indicator

Brushed stainless steel front plates : brushed stainless steel with clear epoxy satin lacquer coating  
 Polished stainless steel front plates : electroplated stainless steel plate with trivalent chrome for mirror finish  
 White interiors and rockers  
 Terminal screws captive and backed off ready for cabling

Pack	Cat. Nos.								
			<b>Double pole socket outlets 13 A - 250 V~</b>						
			Conform to BS 1363 - Part 2 : 1995 2 earth terminals Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 60	7332 60	1 gang – switched						
1	7330 61	7332 61	1 gang – switched + red LED power indicator						
1	7330 70	7332 70	2 gang – switched						
1	7330 71	7332 71	2 gang – switched + red LED power indicator						
1	7330 74	7332 74	2 gang – switched outboard for standard and clean earth applications						

Pack	Cat. Nos.								
			<b>Unswitched socket outlets 13 A - 250 V~</b>						
			Conform to BS 1363 - Part 2 : 1995 2 earth terminals Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 65	7332 65	1 gang – unswitched						
1	7330 75	7332 75	2 gang – unswitched						

Pack	Cat. Nos.								
			<b>Key switched socket 13 A - 250 V~</b>						
			Conform to BS 1363 - part 2 : 1995 Flush mounting back box : min. 35 mm deep Nominal plate dimensions : 86 x 146 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	8200 71	8200 72	2 gang single socket with DP key switch						

Pack	Cat. Nos.								
			<b>RCD sockets 13 A - 250 V~</b>						
			Conform to BS 7288 : 1990 and BS 1363 - Part 2 : 1995 Conventional earth pin release shutter Maximum operating current 16 A Incorporate a "test and reset" button Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 146 mm						
			<b>Active (electronically latched)</b> - trips in the event of a power failure - suitable in applications where automatic restoration of supply would be hazardous, e.g. machinery, power tools						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 97	7332 97	RCD unit 2 gang DP 30 mA active						
			<b>Passive (mechanically latched)</b> - does not trip in the event of a power failure - suitable in applications where automatic restoration of supply is required, e.g. fridge, freezer, unmanned areas						
1	7330 98	7332 98	RCD unit 2 gang DP 30 mA passive						

Pack	Cat. Nos.								
			<b>Socket outlets 15 A - 250 V~</b>						
			Conform to BS 546 : 1950 Flush mounting back box : min. 35 mm deep Nominal plate dimensions : 86 x 86 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 88	7332 88	1 gang – unswitched						
1	7330 89	7332 89	1 gang – switched						

Pack	Cat. Nos.								
			<b>Socket outlets 2 A - 250 V~</b>						
			Conform to BS 546 : 1950 Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 59	7332 59	1 gang – unswitched						

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Wiring%20Devices%202012.pdf>



**KEMPSTON**  
CONTROLS