


# Atlantic, Atlantic-E and Marina cabinets equipment



0 462 28 supplied not assembled

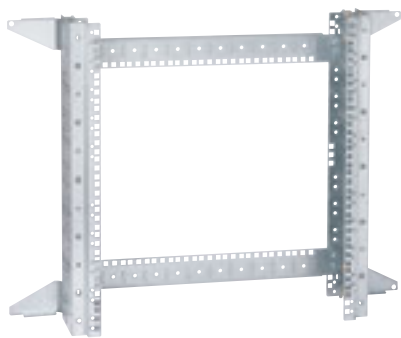

0 475 45



0 367 36



0 363 13



Metal Atlantic cabinet equipped with document holder Cat.No 0 365 82



Cabinet and equipment selection chart **p. 262-263**  
 Technical characteristics **p. 280**

## Pack Cat.Nos Lina 25 sectioned uprights

Pack	Cat.Nos	Set of 2 uprights		Section
		For cabinets height (mm)	Length (mm)	
5	0 361 50	300	237	L
5	0 361 51	400	337	
5	0 361 52	500	437	
5	0 361 53	600	537	
5	0 361 54	700	637	
5	0 361 55	800	737	
5	0 361 56	1000	937	
1	0 361 58	1200	1137	
1	0 361 59	1400	1337	
10	0 361 92	Upright to be cut Length 3 m - Section L		

## Lina 25 rail

### Rail

For fixing onto uprights with clip nut Cat.No 0 364 42 and screw-washer Cat.No 0 367 75 (p. 281)

└ depth 15 mm

Pack	Cat.Nos	For cabinets width (mm)	Crosspiece length (mm)	Section
10	0 367 81	400	343	
10	0 367 82	500	443	
10	0 367 83	600	543	
10	0 367 84	800	743	
10	0 367 85	1000	943	
10	0 367 86	1200	1143	

Pack	Cat.Nos	Rail to be cut, length 2 m	
		EN 60715	depth (mm)
10	0 374 02	Symmetrical	└ depth 15 mm
10	0 374 07	Symmetrical	└ EN 60175 depth 7.5 mm
10	0 374 04	Symmetrical	└ EN 60175 depth 7.5 mm
10	0 477 22	└ depth 7.5 mm with oblongs	
10	0 477 23	└ depth 15 mm with oblongs	

Pack	Cat.Nos	Protective conductor lug
5	0 367 36	Support lug for protection copper bar For Atlantic enclosures only

## Wall-mounting VDI chassis for Atlantic, and Marina cabinets

Pack	Cat.Nos	Wall-mounting VDI chassis for Atlantic, and Marina cabinets
1	0 462 27	For integrating 19" VDI equipment in Atlantic, and Marina cabinets, width 600 or 800 mm and depth 250 mm min. In 400 mm wide cabinets, the chassis can to integrate 10" VDI equipment Can be fixed directly to the wall to create a wall-mounting chassis (without cabinet) Self-locking cable ties and cable ties with tightening indicator (p. 762) can be fitted
1	0 462 28	6 U chassis
1	0 462 29	12 U chassis
1	0 462 29	16 U chassis

## Pack Cat.Nos Copper bars

Pack	Cat.Nos	Copper bars with tapped holes				
		Cross-section (mm)	Permis I (A)	Tapped holes		Length (mm)
10	0 373 88	12 x 2	110	Ø mm	Pitch	990
10	0 373 89	12 x 4	160	M5	18	990
100	0 373 65 <sup>1</sup>	Connectors for bars with tapped holes 1 or 2 conductor from 1.5 to 10 mm <sup>2</sup> (supplied with Ø5 mm screws)				
10	0 373 49	Non perforated copper bar				
100	0 373 60	1.5 to 4 mm <sup>2</sup>	180	991.5		
10	0 373 61	6 to 16 mm <sup>2</sup>				
10	0 373 62	10 to 35 mm <sup>2</sup> (supplied with M6 CHC Ø5 mm)				

Pack	Cat.Nos	Door contact
1	0 363 13	For example, to cut off the air conditioning and the lighting supply as soon as the enclosure or cabinet door is opened 3 A - 240 V 1 NC contact + 1 NO contact For Atlantic, Atlantic-E and Marina cabinets Supplied with fixing lug

Pack	Cat.Nos	Hinged glass doors					
		Width (mm)	Height (mm)	External dim. Width (mm)	Window Height (mm)	Window Depth (mm)	Usable Depth (mm)
1	0 475 45	300	400	50	230	330	42
1	0 475 46	400	400	50	330	330	42
1	0 475 47	500	500	50	430	430	42

## Self adhesive document holder (for plans)

Pack	Cat.Nos	Open - RAL 7035				
		External dimensions		Internal dimensions		
		Width (mm)	Height (mm)	Width (mm)	Height (mm)	Depth (mm)
20	0 365 80	340	235	310	200	18
20	0 365 81	260	165	230	130	18
1	0 365 82	Closed - RAL 7035 Rigid plastic - IP 50 Internal dimensions: 324 x 120 x 18 mm				
10	0 097 99	Transparent Flexible plastic - A4 - 320 x 220 mm				

1: Protective conductor per connector (art. 12 of French decree of 14/11/89)