



Product designation
Product type designation
Motor type

Soft starter
ADXC
Asynchronous
three phase

Electrical features

Supplies voltage

Type of system		Three phase
Rated supply voltage	V	220...400 VAC -15%...+10%
auxiliary supply voltage (Us)		Self powered
Rated frequency	Hz	50/60
Start command (Uc)		110...400VAC -15...+10%
Rated starter current Ie	A	45

Rated motor power

IEC ratings (T≤40°C)

230VAC	kW	11
400VAC	kW	22

UL ratings (T≤40°C)

220-240VAC	HP	15
380-415VAC	HP	25

Number of controlled phases	Nr.	2
Built-in bypass	Yes	
Cooling System	Natural	
Rated insulation voltage Ui	V	630

Programming interface

Display	No
Programming with NFC technology	No
Optical port	No

Startup and stop settings

Startup method	Voltage ramp with current limitation	
Stop method	Voltage ramp or free-wheel stop	
Acceleration ramp	s	1...20
Deceleration ramp	s	0...20
Startup voltage	%	0...85%

Protections

Motor protection	Wrong phase sequence
------------------	-------------------------

Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+60°C (with derating >40°C)


Storage temperature

	min	°C	-40
	max	°C	+80
Max altitude		m	1000
Relative humidity		%	<95 non condensing at 40°C
Pollution degree			2
Installation category			III

Housing

Mounting			Screw-fixing or 35mm DIN rail
IP degree of protection			IP20
Dimensions (W x H x D)	mm		45 x 132 x 153.8
Weight	Kg		0.7

Dimensions

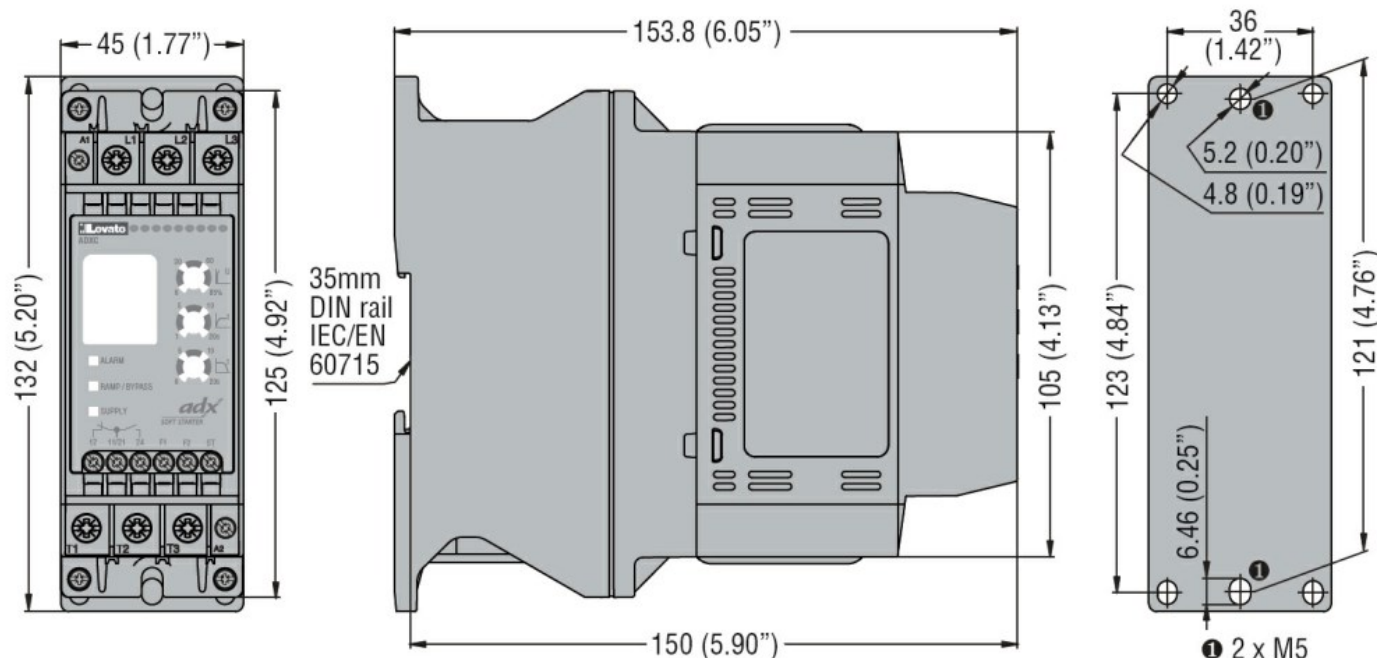

Certifications and compliance

Compliance

CSA C22-2 n° 14
IEC/EN 60947-1
IEC/EN 60947-4-2
UL508

Certificates

cULus
EAC
RCM

ETIM classification

ETIM 8.0

EC000640 - Soft
starter