

M12 male straight field-wireable Replaced Art.-No. 27625

Male straight
5-pole
Clamping range cable entry: 4...6 mm

Image

Vicarious picture


Form	
	12721
Technical Data	
Operating voltage	max. 125 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm ²
Sealing range (cable diameter)	4...6 mm
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C
Commercial data	
Net weight	26
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Minimum order quantity (piece)	1

Comments


Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

Male

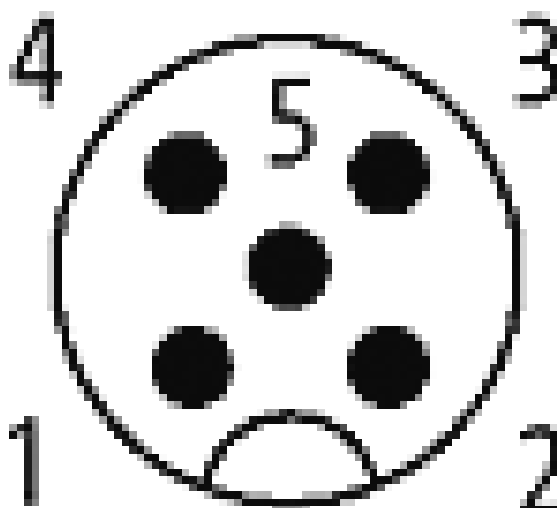

Circuit diagram

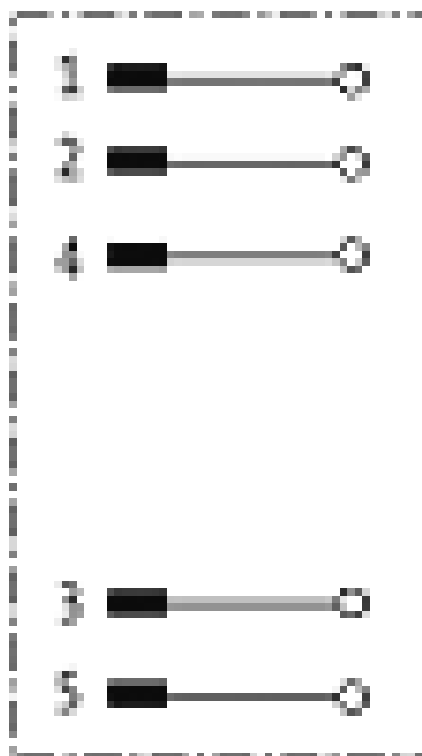

Dimension drawing

