


modular fuse carriers and device accessories



4049 05



4049 26



0016 91



0016 90

Pack	Cat. Nos.	Modular fuse carrier accessory
3	0057 99	Padlock support suitable for Ø 5 mm padlocks

Pack	Cat. Nos.	Modular device accessories	
10	4063 07	Spacing elements For heat reduction - 0-5 module	
2	4063 03	Locking device Attachment for Ø 5 mm padlocks for DX ³	
3	4063 13	Padlock Ø 5 mm	
20	4049 05	Entry terminals Accepts conductors 4-25 mm ² max for single pole busbars only IP 2X	
20	4049 06	Entry terminals Accepts conductors 6-35 mm ² max	
20	4049 26	Supply busbars For 13 single pole units ¹ Reversible blue/black	
10	4049 37	Supply busbars For 57 single pole units ¹ Reversible blue/black	
5	4049 38	Supply busbars For 6 double pole units ^{2,3}	
10	4049 39	Supply busbars For 28 double pole units ^{2,3}	
5	4049 42	Supply busbars For 4 triple pole units ^{2,3}	
10	4049 43	Supply busbars For 19 triple pole units ^{2,3}	
3	4049 44	Supply busbars For 3 four pole units ^{2,3}	
20	4049 88	Insulation shroud For non-utilised busbar prongs	
10	0049 96	Self-adhesive label holder Width : 16 mm Width available for marking : 12 mm Length 430 mm (24 modules)	
10	0016 65	Grey blanking plate RAL 7035 18 module, blanking strip	

1 : 16 mm² section rated at 80 A with central feed
2 : 10 mm² section rated at 63 A with central feed
3 : With insulated ends

Pack	Cat. Nos.	Modular device accessories (continued)
5	0016 91	Protective terminal shield Light grey Ensures the protection of wiring and terminals in modular mechanisms fitted in enclosures (Atlantic or Marina) Width 45 mm, Length 1 m Clips on to support 0016 90 (below)
10	0016 90	Insulated support For protective terminal shield Clips on to rail EN 60715

DX³ MCBs p. 56-57



Enclosures p. 14-23



cylindrical cartridge fuses

HRC



Dimensions p. 79

Numbers refer to physical size of fuse i.e. 10 x 38 means Ø 10 mm x 38 mm length

Pack	Cat. Nos.	Miniature type 5 x 20		
		Type F (fast acting) fuse Ceramic body Conform to IEC 60127-2 For use with transformers (see p. 90), Viking 3 terminals (see p. 118) etc.		
		Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
10	0102 02	0.2		
10	0102 05	0.5		
10	0102 06	0.63		
10	0102 10	1		
10	0102 12	1.25		
10	0102 16	1.6		
10	0102 20	2	250	1 500
10	0102 25	2.5		
10	0102 30	3.15		
10	0102 50	5		
10	0102 63	6.3		
10	0102 96 ¹	10	250	500

Pack	Cat. Nos.	Type gG			
		Conform to BS EN 60269-1, IEC 60269-1 Bureau Veritas approved			
		Without indicator	Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
		8 x 32			
10	0123 01		1		
10	0123 02		2		
10	0123 04		4		
10	0123 06		6		
10	0123 08		8	400	20 000
10	0123 10		10		
10	0123 12		12		
10	0123 16		16		

1 : Overrating not described by standards

Pack	Cat. Nos.	Type gG industrial			
		HRC (high rupturing capacity) Conform to BS EN 60269-1 and 2 (BS 88) IEC 60269-1, 2 and 2-1 Bureau Veritas approved			
		Without indicator	Rating (Amps)	Voltage ~ (Volts)	Breaking capacity (Amps)
		10 x 38			
10	0133 94		0.5		
10	0133 01		1		
10	0133 02		2		
10	0133 04		4		
10	0133 06		6	500	100 000
10	0133 08		8		
10	0133 10		10		
10	0133 12		12		
10	0133 16		16		
10	0133 20		20		
10	0133 25		25		
		Without striker			
		14 x 51			
10	0143 02		2		
10	0143 04		4		
10	0143 06		6		
10	0143 10		10		
10	0143 16		16	500	100 000
10	0143 20		20		
10	0143 25		25		
10	0143 32		32		
10	0143 40		40		
10	0143 50		50		
		Without striker			
		22 x 58			
10	0153 10		10		
10	0153 16		16		
10	0153 20		20		
10	0153 25		25	500	100 000
10	0153 32		32		
10	0153 40		40		
10	0153 50		50		
10	0153 63		63		
10	0153 80		80		
10	0153 96		100		
10	0153 97		125	400	


Pack	Cat. Nos.	Neutral links	
10	0123 00	8 x 32	
10	0133 00	10 x 38	
10	0143 00	14 x 51	
10	0153 00	22 x 58	

High breaking capacity suits industrial applications



Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>

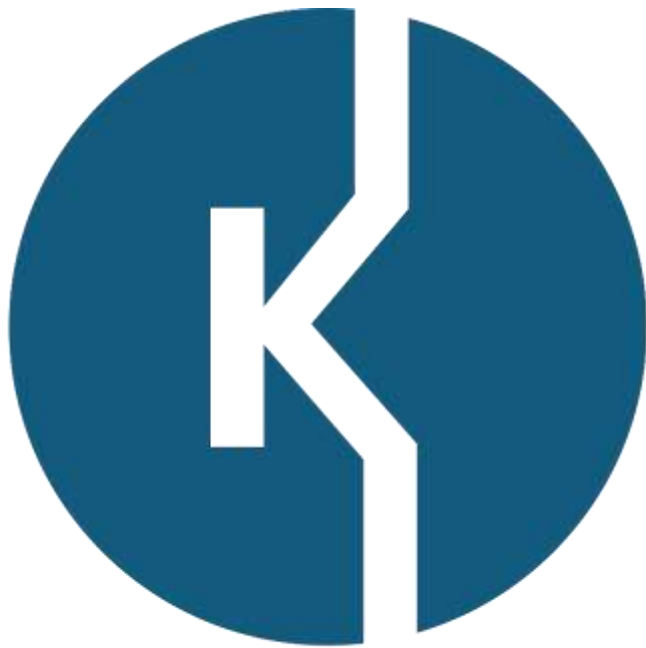

KEMPSTON
CONTROLS