# **SIEMENS**

Product data sheet 3TC4417-0AW4



CONTACTOR, SIZE 2, 2-POLE DC-3 AND 5,RATD.OPERAT.CURR.32A AUXILIARY CONTACTS 22 (2NO+2NC) DC OPERATION DC 48V

General details:				
Size of the contactor		2		
Number of poles		2		
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		К		
Item designation / according to DIN EN 61346-2		Q		
Protection class IP		IP00		
Ambient temperature				
during operating	°C	-25 +55		
Control circuit:				
type of voltage		DC		
type of voltage  Control supply voltage		DC		
	V	DC 48		
Control supply voltage	V V			
Control supply voltage  • for DC / rated value / minimum		48		
Control supply voltage  • for DC / rated value / minimum  • for DC / rated value / maximum		48		
Control supply voltage  • for DC / rated value / minimum  • for DC / rated value / maximum  Main circuit:		48 48		
Control supply voltage  • for DC / rated value / minimum  • for DC / rated value / maximum  Main circuit:  Number of NO contacts / for main contacts		48 48 2		

• at DC-3 / at DC-5 / at 220 V / rated value	Α	32
• at DC-3 / at DC-5 / at 600 V / rated value	Α	21
• at DC-3 / at DC-5 / at 750 V / rated value	Α	7.5
Service power		
• at DC-3 / at DC-5 / at 110 V / rated value	kW	2.5
• at DC-3 / at DC-5 / at 220 V / rated value	kW	5
• at DC-3 / at DC-5 / at 440 V / rated value	kW	9
• at DC-3 / at DC-5 / at 600 V / rated value	kW	9
• at DC-3 / at DC-5 / at 750 V / rated value	kW	4

Auxiliary circuit:		
Identification number and letter for switching elements	22	
Number of NO contacts / for auxiliary contacts	2	
Number of NC contacts / for auxiliary contacts	2	
Number of change-over switches / for auxiliary contacts	0	

Connection type:	
Design of the electrical connection / for main current circuit	screw-type terminals
Design of the electrical connection / for auxiliary and control current circuit	screw-type terminals

Mechanical design:			
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022	
Type of fixing/fixation / series installation		Yes	
Width	mm	70	
Height	mm	85	
Depth	mm	145	

## Certificates/approvals:

General Product Approval

Test Certificates Shipping Approval









Special Test Certificate



### other

Confirmation

Declaration of Conformity

other

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

#### Cax online generator:


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3TC4417-0AW4/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3TC4417-0AW4

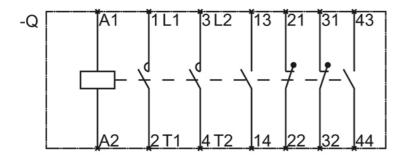

last change: Mar 27, 2012