

Using the specially designed tool, support bars can be easily and cleanly removed

Once the support rib is removed, the base can be snapped to length

By removing individual support ribs, large gaps for T-junctions can be made without the need for a saw

Cable retainers are available for horizontal and inverted installations. Label holders clip onto fingers for easy identification of cables

With its innovative snap to length design, Transcab open slot panel trunking is quick and easy to install without compromising on quality. And with its global standards approvals, Transcab is ideal for almost any industrial application.

Strength and flexibility

Transcab's durable PVC body consists of 6mm gaps and 6.5mm fingers with unique support ribs that provide strength and rigidity. Trunking fingers are easily removed by snapping at support rib or base level without the need for a saw.

FEATURES

- Snap to length design - for quick and simple installation without the need for a saw
- Rounded fingers - easily removed at support rib or base level to create T-junctions
- Clip-on covers with raised lines - for quick installation and easy label alignment
- Available in PVC and PC/ABS halogen-free versions - to suit a variety of applications
- Sizes : width x height - from 15 x 25mm to 150 x 100mm
: supplied in 2m lengths

ACCESSORIES

- Unique cutting tool for removing support ribs - Cat No. 0367 10
- Cable retainer - for vertical and inverted installations
- Label holder clips to fingers - for easy identification of cables

See p. 50

TECHNICAL DATA

APPROVALS: EN 50085 Parts 2 and 3, UL and CSA

SLOTING: Open with 6mm gaps

FLAMMABILITY: UL94 V0 rated


OPERATING TEMPERATURE: -5 to + 60°C

COLOUR: Grey RAL 7030 (PVC), light grey RAL 7035 (PC/ABS halogen-free)



Transcab® open slot panel trunking

PVC and PC/ABS halogen free

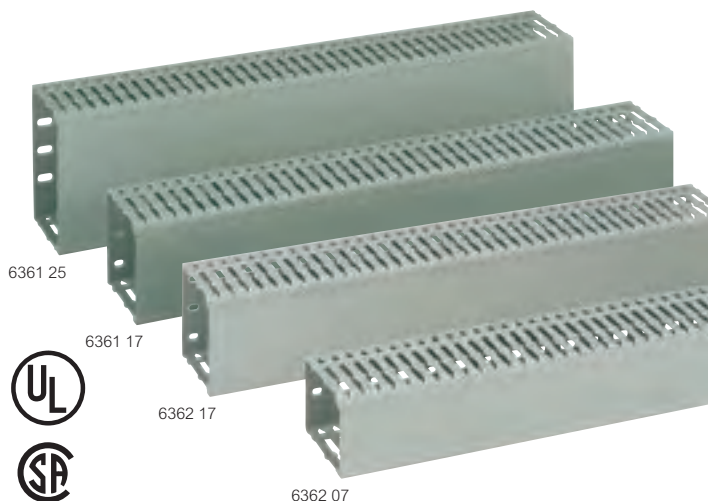

Dimensions and technical information p. 51
Accessories **opposite**

Conforms to EN 50085 Parts 2 and 3. UL and CSA approval
Material : PVC self-extinguishing or PC/ABS halogen free
Colour : grey RAL 7030 (PVC) or light grey RAL 7035 (PC/ABS)
PC/ABS range passes IEC 695-2-1 850 °C glow wire test
Operating temp. : -5 to +60 °C
UL classification : UL94 VO
Oxygen index : 43% (PVC) or 37% (PC/ABS) EN ISO 4589 (low fume)
Metric size body in 2 m lengths (6 mm gap/6.5 mm finger width)
DIN fixing centres of 12.5/25 mm
Maximum space for cables with good heat dissipation
Exit cables at terminal or base level

Pack Cat. Nos. Plastic panel trunking (base + cover)


Pack	Cat. Nos.		Width x Height (mm)	Capacity (mm ²)
	PVC Grey RAL 7030	PC/ABS Grey RAL 7035 halogen free		
2 metre lengths				
32	6360 95		15 x 25	264
60	6361 00		25 x 25	391
56	6361 05		40 x 25	692
40	6360 96		15 x 40	455
56	6361 01		25 x 40	720
48	6361 06		40 x 40	1 245
32	6361 11		60 x 40	1 932
24	6361 15		80 x 40	2 647
24	6361 19		100 x 40	3 363
56	6361 02	6362 02	25 x 60	1 159
48	6361 07	6362 07	40 x 60	2 007
32	6361 12	6362 12	60 x 60	3 115
24	6361 16		80 x 60	4 200
24	6361 20		100 x 60	5 307
40	6361 03		25 x 80	1 600
40	6361 08		40 x 80	2 717
32	6361 13	6362 13	60 x 80	4 216
24	6361 17	6362 17	80 x 80	5 715
16	6361 21		100 x 80	7 215
16	6361 25	6362 25	120 x 80	8 729
24	6361 09		40 x 100	3 354
24	6361 14		60 x 100	5 216
20	6361 18		80 x 100	7 078
16	6361 22		100 x 100	8 960
12	6361 23		150 x 100	13 683

Spare covers

Pack	PVC	Width (mm)	2 metre lengths
36	0370 10	15	- also used for marking ¹
36	0370 11	25	
36	0370 12	40	
36	0370 13	60	
36	0370 14	80	

¹ : Clips to label holder Cat. No. 0367 02

Transcab® accessories

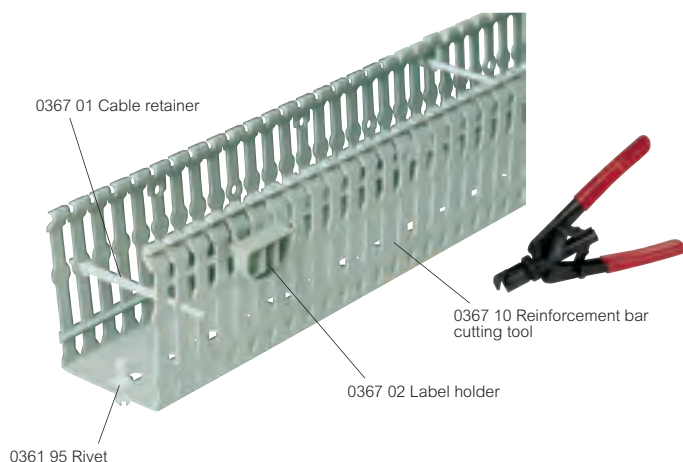

Pack	Cat. Nos.	Transcab cutting tool
1	0367 10	Tool for cutting 6 mm reinforcement bars

Pack	Cat. Nos.	Cable retainer
50	0367 01	Cable retainer - clips through trunking fingers

Pack	Cat. Nos.	Marking accessories
50	0367 02	Label holder Label holder - (clips to finger) for marking
10	0395 98	Black felt tip pen Indelible for marking




Pack	Cat. Nos.	Fixing accessories
100	6361 90	To DIN rail Insulated Nylon fixing screws Ø 6 mm for fixing the panel trunking to DIN rail
500	6361 95	To plain plate Insulated plastic rivets Ø 6 mm for fixing the panel trunking to a plain plate without the need of a screw
20	0366 42	To enclosure door Material : polyamide 6/6 For fixing the panel trunking to an enclosure door Fits under warning lights or other auxiliary controls attached to door Enables direct mounting of trunking by a manual 1/4 turn



Pack	Cat. Nos.	Ø of roll	Ø variations	Braided sleeving
1	0366 38	Ø 20 mm	10 - 30 mm	Material : black polyester 50 m roll in dispenser box Used to protect runs of cables to door equipment
1	0366 39	Ø 30 mm	18 - 54 mm	



Intrinsically safe
Lina 25 available to order
on special request
Contact us on
+44 (0) 845 605 4333



Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



KEMPSTON
CONTROLS