

## Datasheet - MZM 100 ST-1P2PWRE-A

Solenoid interlock / MZM 100



☒ Preferred typ



(Minor differences between the printed image and the original product may exist!)

- Automatic latching
- Solenoid interlocks (for the protection of man) with innovating and unique operating principle
- 40 mm x 179 mm x 40 mm
- Electronic contact-free, coded system
- Thermoplastic enclosure
- Max. length of the sensor chain 200 m
- 3 LEDs to show operating conditions
- Sensor technology permits an offset between actuator and interlock of  $\pm 5$  mm vertically and  $\pm 3$  mm horizontally
- Intelligent diagnosis
- Self-monitoring series-wiring of 31 sensors
- Patented
- Guard locking monitored
- Connector M23, 8+1-pole
- Power to lock

### Ordering details

Product type description	MZM 100 ST-1P2PWRE-A
Article number	101211064
EAN code	4030661389141
eCl@ss	27-27-26-03

### Approval


Approval



### Classification

Standards	EN ISO 13849-1, IEC 61508, IEC 60947-5-3, EN 60947-5-1
PL	e
Control category	up 4
PFH	$3.5 \times 10^{-9}/h$
SIL	up 3
Mission time	20 Years
Classification	PDF-M

### Global Properties

Product name	MZM 100
Standards	IEC 61508, EN ISO 13849-1, EN ISO 13849-1
Compliance with the Directives (Y/N) 	Yes
Suitable for safety functions (Y/N)	Yes
Protection rating	II
Series-wiring	up to 31 components
Length of the sensor chain	max. 200 m
– without detriment to the category to EN ISO 13849-1	
Active principle	inductive
Duty cycle	100 %
Materials	
– Material of the housings	Plastic, glass-fibre reinforced thermoplastic
Housing coating	None
Weight	635 g
Guard locking monitored (Y/N)	Yes
Actuator monitored (Y/N)	No
Idle assignable pushbutton and LED (Y/N)	No
Reaction time	< 150 ms
Duration of risk	< 150 ms
Time to readiness	< 4000 ms
Recommended actuator	MZM 100-B1.1

## Mechanical data

---

Design of electrical connection	Connector M23, 8+1-pole
Mechanical life	≥ 1.000.000 operations
notice - Mechanical life	operations for guards ≤ 5 kg; actuating speed ≤ 0,5 m/s
restistance to shock	30 g / 11 ms
Resistance to vibration	10 ... 150 Hz, Amplitude 0,35 mm
Emergency unlocking device (Y/N)	No
Manual release (Y/N)	No
Emergency release (Y/N)	No
Latching (Y/N)	Yes
electrically adjustable latching force	30 N ... 100 N
Clamping force F	
– typically	750 N
– guaranteed	500 N

## Ambient conditions

---

Ambient temperature	
– Min. environmental temperature	–25 °C
– Max. environmental temperature	+55 °C
Storage and transport temperature	
– Min. Storage and transport temperature	–25 °C
– Max. Storage and transport temperature	+85 °C
Relative humidity	30% ... 95%
– non-condensing	
– non-icing	
Protection class	IP67 to IEC/EN 60529
Air clearances and creepage distances To IEC/EN 60664-1	
– Rated impulse withstand voltage U <sub>imp</sub>	0,8 kV
– Overvoltage category	III
– Degree of pollution	3

Electrical data

Number of auxiliary contacts	0 piece
Number of safety contacts	2 piece
Cross circuit/short circuit recognition possible (Y/N)	Yes
Power to unlock	No
Power to lock	Yes
Supply voltage $U_B$ (stabilised PELV)	
- Min. supply voltage	20.4 VDC
- Max. supply voltage	26.4 VDC
Switch frequency	1 Hz
Rated insulation voltage $U_i$	32 VDC
Operating current $I_e$	1 A
Utilisation category	DC-13
No-load current $I_o$	max. 0,5 A
Required rated short-circuit current	100 A
Device insulation	$\leq 2$ A (if used in accordance with UL 508)
notice	Cable length and cable section alter the voltage drop depending on the output current

Electrical data - Safety inputs

Safety inputs	X1 and X2
Rated operating voltage $U_e$	-3 V ... 5 V (Low) 15 V ... 30 V (High)
Operating current $I_e$	> 2 mA / 24 V

Electrical data - Safety outputs

Safety outputs	Y1 and Y2
Fuse rating	short-circuit proof, p-type
Rated operating voltage	0 V ... 4 V under Supply voltage $U_B$
Residual current $I_r$	$\leq 0,5$ mA
Operating current $I_e$	0,25 A
Utilisation category	DC-12, DC-13

Electrical data - Diagnostic output

Serial diagnostics (Y/N)	No
Fuse rating	p-type, short-circuit proof
Rated operating voltage	-3 V ... 5 V (Low) 15 V ... 30 V (High)
Operating current $I_e$	0,05 A
Utilisation category	DC-12, DC-13
Wiring capacitance for serial diagnostics	-
diagnostic signals	guard door closed
Operating principle of the diagnostic output	The short-circuit proof diagnostic output OUT can be used for central visualisation or control tasks, e.g. in a PLC.
notice	The diagnostic output is not a safety-relevant output!

Electrical data - Solenoid control IN

Rated operating voltage $U_e$	-3 V ... 5 V (Low) 15 V ... 30 V (High)
-------------------------------	--

Operating current I <sub>e</sub>	typically 10 mA / 24 V, dynamically 20 mA
----------------------------------	---

LED switching conditions display

LED switching conditions display (Y/N)	Yes
LED switching conditions display	
- Supply voltage U <sub>B</sub>	green LED
- switching condition	yellow LED
- Error functional defect	red LED

ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None

Dimensions

Dimensions of the sensor	
- Width of sensor	40 mm
- Height of sensor	179 mm
- Length of sensor	40 mm

Pin assignment

1	A1 Supply voltage U <sub>B</sub>
2	X1 Safety input 1
3	A2 GND
4	Y1 Safety output 1
5	OUT Diagnostic output
6	X2 Safety input 2
7	Y2 Safety output 2
8	IN Solenoid control
9	without function

notice

As long as the actuating unit remains inserted in the solenoid interlock, the unlocked safety guard can be relocked. The safety outputs then will be enabled again; opening the safety guard therefore is not required.

Included in delivery

Actuators must be ordered separately.

Ordering code

MZM 100	
	<b>Guard locking monitored</b>
	<b>MZM 100 (1)-(2)(3)(4)-A</b>
(1)	
ST	connector M23, (8 + 1-pole)
ST2	connector M12, 8-pole
(2)	
1P2PW	1 Diagnostic output and 2 Safety outputs, p-type, combined diagnostic

	signal: guard door closed and interlocking device locked serial diagnostic output and 2 Safety outputs, p-type
<b>SD2P</b>	
<b>(3)</b>	
<i>without</i>	without Latching force
<b>RE</b>	electrically adjustable latching force 30 ... 100 N
<b>(4)</b>	
<b>M</b>	Permanent magnet approx. 30 N
	<b>Actuator monitored</b> <b>MZM 100 B (1)-(2)RE(3)-A</b>
<b>(1)</b>	
<b>ST</b>	connector M23, (8 + 1-pole)
<b>ST2</b>	connector M12, 8-pole
<b>(2)</b>	
<b>1P2PW2</b>	1 diagnostic output and 2 safety outputs, all p-type and combined diagnostic signal: safety guard closed and solenoid interlock locked.
<b>SD2P</b>	serial diagnostic output and 2 Safety outputs, p-type
<b>(3)</b>	
<b>M</b>	Permanent magnet approx. 30 N
<b>B</b>	<b>Indication legend</b>
<b>RE</b>	Actuator monitored
<b>A</b>	electrically adjustable latching force 30 ... 100 N Power to lock

Documents

---

- Operating instructions and Declaration of conformity** (it) 322 kB, 29.11.2012  
Code: mrl\_mzm100\_it
- Operating instructions and Declaration of conformity** (cn) 439 kB, 29.05.2017  
Code: mrl\_mzm100-100b\_cn
- Operating instructions and Declaration of conformity** (es) 362 kB, 28.04.2017  
Code: mrl\_mzm100-100b\_es
- Operating instructions and Declaration of conformity** (en) 360 kB, 21.03.2017  
Code: mrl\_mzm100-100b\_en
- Operating instructions and Declaration of conformity** (fr) 362 kB, 28.02.2017  
Code: mrl\_mzm100-100b\_fr
- Operating instructions and Declaration of conformity** (pt) 368 kB, 05.05.2017  
Code: mrl\_mzm100-100b\_pt
- Operating instructions and Declaration of conformity** (pl) 384 kB, 13.07.2017  
Code: mrl\_mzm100-100b\_pl
- Operating instructions and Declaration of conformity** (it) 363 kB, 03.07.2017  
Code: mrl\_mzm100-100b\_it
- Operating instructions and Declaration of conformity** (nl) 347 kB, 04.10.2016  
Code: mrl\_mzm100-100b\_nl
- Operating instructions and Declaration of conformity** (de) 369 kB, 21.03.2017

Code: mrl\_mzm100-100b\_de

**Wiring example** (de) 41 kB, 29.09.2009

Code: kmzm1p01

**Wiring example** (99) 19 kB, 22.01.2009

Code: kmzm1l03

**Brochure** (de) 5 MB, 11.08.2015

Code: b\_css\_brosch\_de

**Brochure** (en) 13 MB, 11.08.2015


Code: b\_css\_brosch\_en

**EAC certification** (ru) 809 kB, 05.10.2015

Code: q\_6040p17\_ru


## Images

---

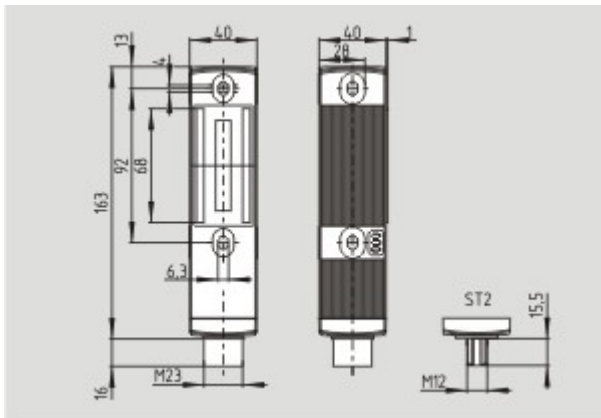


Dimensional drawing (basic component)

---

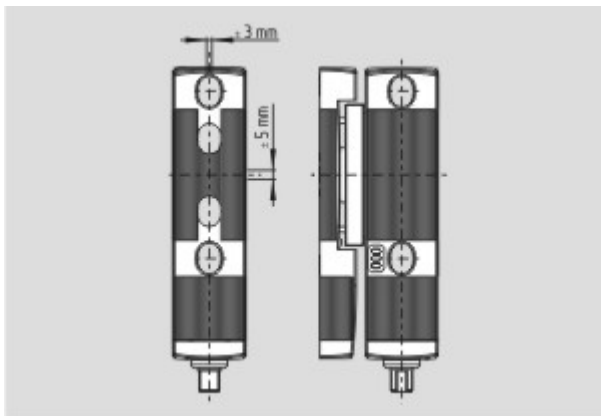


Dimensional drawing (miscellaneous)

---



Contact arrangement

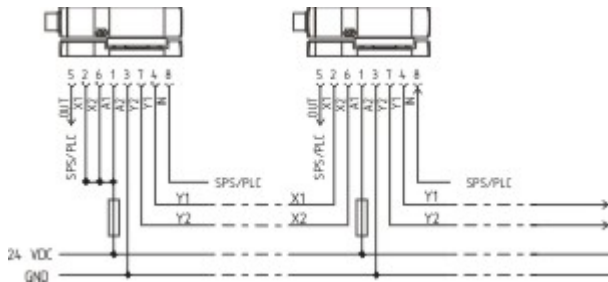

Wiring example

## System components

### Actuator



#### 101204290 - MZM 100-B1.1

- actuator free from play
- i.e. neutralisation of undesired noises

### Accessories



#### 101210642 - MZM 100 TARGET

- for the variable setting of the latching force
- gradually adjustable by steps of approx. 10 N within a range from approx. 30 N to 100 N



#### 101185510 - MS MZM 100-W

### Connector



#### 101209994 - S-K8+1P-M23-S-G-X-X-X-X-4

- Connector without cable
- with shrink connection
- 8+1-pole