

PC CABLE,  
FOR PC/PG COMMUNICATION WITH SIMOCODE PRO  
OR SIRIUS 3RW44 SOFT STARTER OR MODULAR  
SAFETY SYSTEM 3RK3 VIA THE SYSTEM INTERFACE



## General technical data:

<b>product brand name</b>		SIRIUS
<b>product designation</b>		PC cable
<b>Ambient temperature</b>		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +80
<b>Relative humidity</b>		
• during operating phase	%	5 ... 95

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



CCC



CSA



GOST



UL



C-TICK

[Explosion Protection Certificate](#)

#### Test Certificates

[Special Test Certificate](#)

#### Shipping Approval



ABS



DNV



GL

#### other

[Confirmation](#)

[Declaration of Conformity](#)



Profibus

[PROFISafe-Certification](#)

[other](#)

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator



<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3UF7940-0AA00-0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3UF7940-0AA00-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UF7940-0AA00-0)

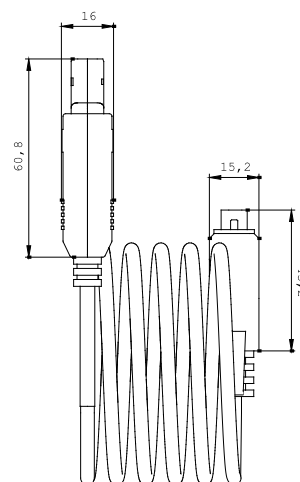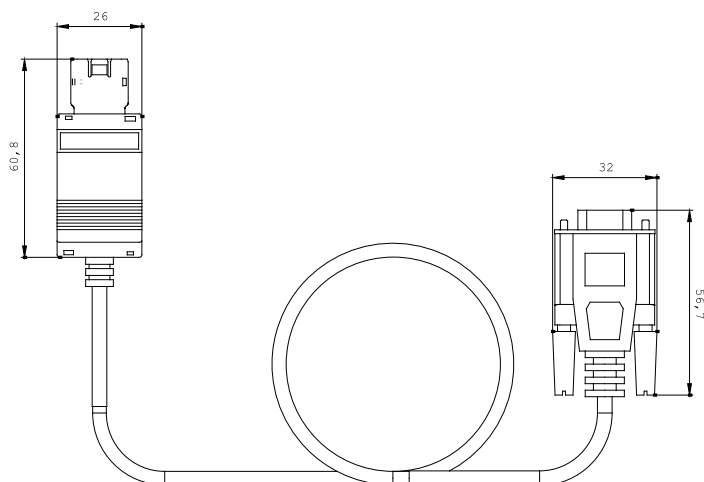

last change:

Aug 4, 2012