


accessories

for Viking 3 terminal blocks - screw connection

TERMINAL BLOCK				INSULATION		BRIDGING COMBS					PROTECTION		MEASURE- MENT	ASSOCIATED PRODUCTS													
Nominal cross section (mm ²)	Width (mm)	Colour	Cat. Nos.	End cap	Separation / insulation divider	Comb for 2 blocks, auto. front	Comb for 3 blocks, auto. front	Comb for 10 blocks, auto. front	Comb for 12 blocks, side	Bar for 12 blocks, front	Single pole screen	Cut to length screen	Test meter adaptor														
2-5	5		0371 60	0375 50 ³	0375 60	0375 02	-	0375 01	-	-	0375 65	0375 68	0375 27														
			0371 00											End stops p. 126													
			0371 20																								
			0371 30																								
			0371 61											0375 50 ³	0375 60	0375 05	-	0375 04	-	-	0375 65	0375 68	0375 27				
			0371 01																					Label holder for end stop p. 126			
			0371 21																								
			0371 31																								
			0371 77																								
4	6		0371 62	0375 50 ³	0375 60	-	0375 07	-	-	-	0375 66	0375 68	0375 27														
			0371 02											End caps p. 126													
			0371 78																								
10	10		0371 63	0375 50 ³	0375 60	-	-	-	-	0375 40	0375 66	0375 68	-														
			0371 03																								
16	12		0371 64	0375 51	0375 61	-	-	-	-	0375 42	0375 67	0375 69	-														
			0371 04																								
35	15		0371 65	0375 51	0375 61	-	-	-	-	0375 44	0375 67	0375 69	-														
			0371 05																								
70	22		0371 66	built-in	-	-	-	-	-	-	-	-	-														
			0371 06																								
4	6		0371 69	0375 52	0375 62	0375 05	-	0375 04	-	-	-	-	0375 27														
			0371 09																								
2-5	5		0371 67	0375 53	0375 63	0375 02	-	0375 01	-	-	-	-	0375 27 ⁴														
			0371 07																								
4	6		0371 68	0375 53	0375 63	0375 05	-	0375 04	-	-	-	-	0375 27 ⁴														
			0371 08																								
2-5	5		0371 51	0375 54	0375 54	0375 02 ⁴	-	0375 01 ⁴	0375 46 ⁵ 0375 47 ⁵	-	-	-	0375 27 ⁴														
			0371 52											Dividers p. 126													
2-5	5		0371 70	0375 50 ³	-	-	-	-	-	-	-	-	-														
			0371 71																								
			0371 72																								
			0371 73																								
			0371 74																								
			0371 75																								
			0371 76																								
4	6		0371 77	0375 50	0375 60	0375 05	-	0375 04	-	-	0375 65	0375 68	-														
			0371 78												Blown fuse indicators p. 127												
6	8		0371 78	0375 50	0375 60	-	0375 07	-	-	-	0375 66	0375 68	-														
			0371 78																								
4	6		0371 79	0375 52	-	-	-	-	-	-	-	-	-														
			0371 79																								
2-5	6		0371 80	0375 55	0375 62	0375 05	-	0375 04	-	-	-	-	0375 27														
			0371 81												Shielding p. 127												
			0371 81 + 0375 24 / 25 ²																								
			0371 82																								
			0371 83																								
			0371 84												0375 55	0375 62	0375 05	-	0375 04	-	-	-	-	-	0375 27		
			0371 85																								CAB 3 marking system p. 140
			0371 86																								
			0371 86																								
		10	12													0371 87	0375 56	-	-	-	-	-	-	-	-	-	
	0371 87																										
2-5	5		0371 51	0375 54	0375 54	0375 02 ⁴	-	0375 01 ⁴	0375 46 ⁵ 0375 47 ⁵	-	-	-	0375 27 ⁴														
			0371 52												Starfix ferrules p. 148												

Viking 3 terminal blocks – screw connection

for copper cable

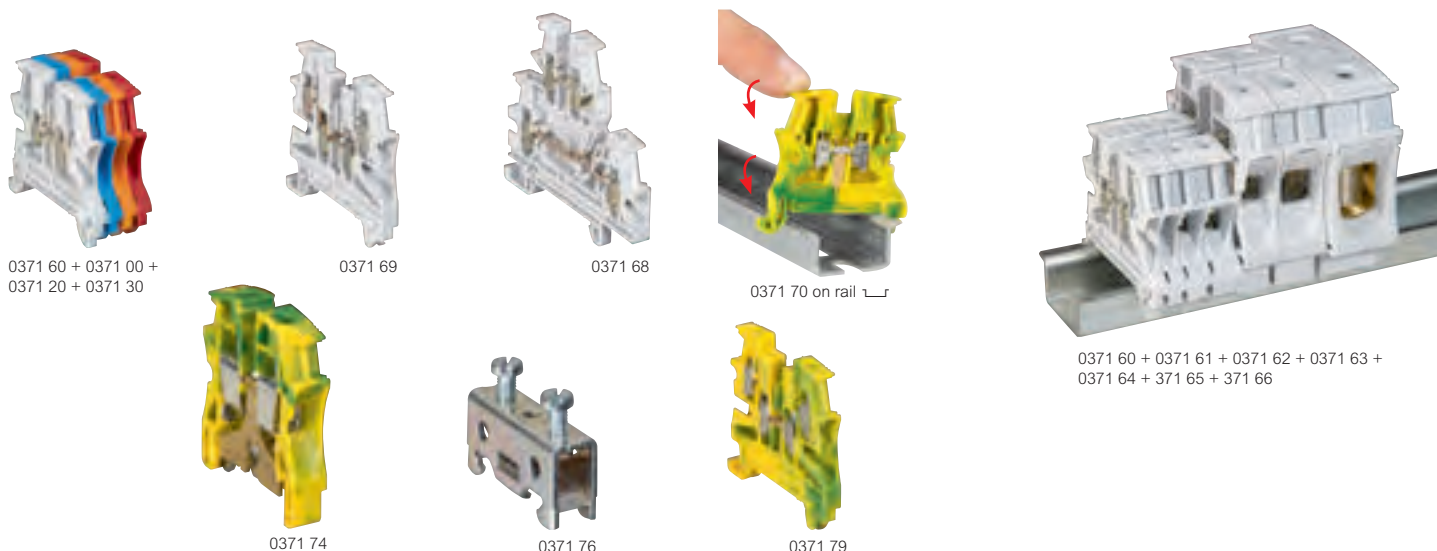

Accessories **p. 126-127**
 Technical characteristics **p. 128-129**

All V2 polyamide UL94 960 °C to IEC EN 60695-2-11
 Compatible with either rigid (0.25 mm² to 95 mm²) or flexible (0.25 mm² to 70 mm²) copper cables
 Facility for 2 bridging combs
 Compatible with rails depth 15 mm and rails EN 60715 depth 7.5 mm and 15 mm
 Range comprises only 2 block heights (2.5 mm² to 10 mm² and 16 mm² to 70 mm²) ensuring a neat installation

Pack	Cat. Nos.	Connection	Capacity			Width (mm)
1 connection - 1 entry/1 exit						
Grey for standard circuit						
Blue for neutral conductor						
Orange for circuit not broken by the master isolating device						
Red for special circuits (safety, protected, etc)						
Colour	Nominal cross section (mm ²)	Rigid cable (mm ²)	Flexible cable (mm ²)			
60	0371 60	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5
60	0371 00	Blue ●				
60	0371 20	Orange ●				
60	0371 30	Red ●				
50	0371 61	Grey ●	4	0.25 to 6	0.25 to 4	6
50	0371 01	Blue ●				
50	0371 21	Orange ●				
50	0371 31	Red ●				
40	0371 62	Grey ●	6	0.5 to 10	0.25 to 6	8
40	0371 02	Blue ●				
30	0371 63	Grey ●	10	1.5 to 16	2.5 to 10	10
30	0371 03	Blue ●				
20	0371 64	Grey ●	16	1.5 to 25	4 to 16	12
20	0371 04	Blue ●				
20	0371 65	Grey ●	35	2.5 to 50	4 to 35	15
20	0371 05	Blue ●				
10	0371 66 ¹	Grey ●	70	25 to 95	16 to 70	22
1 connection - 2 entries/2 exits						
25	0371 69	Grey ●	4	0.25 to 6	0.25 to 4	6
25	0371 09	Blue ●				
2 connections on 2 levels						
60	0371 67	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5
60	0371 07	Blue ●				
60	0371 68	Grey ●	4	0.25 to 6	0.25 to 4	6
60	0371 08	Blue ●				
3 connections on 3 levels						
50	0371 51 ²	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5

Pack	Cat. Nos.	Protection	Capacity			Width (mm)
1 connection - 1 entry/1 exit - metal base						
Screwless fixing on rail up to 10 mm width						
PEN from 10 mm ²						
Colour	Nominal cross section (mm ²)	Rigid cable (mm ²)	Flexible cable (mm ²)			
60	0371 70	Green/yellow ●	2.5	0.25 to 4	0.25 to 2.5	5
50	0371 71	Green/yellow ●	4	0.25 to 6	0.25 to 4	6
40	0371 72	Green/yellow ●	6	0.5 to 10	0.25 to 6	8
30	0371 73	Green/yellow ●	10	1.5 to 16	2.5 to 10	10
10	0371 74	Green/yellow ●	16	1.5 to 25	4 to 16	12
10	0371 75	Green/yellow ●	35	2.5 to 50	4 to 35	15
1 connection - bare block - metal base						
10	0371 76	-	35	2.5 to 50	4 to 35	15
1 connection - 2 entries/2 exits - metal base						
Screwless fixing on rail						
50	0371 79	Green/yellow ●	4	0.25 to 6	0.25 to 4	6
1 connection - 1 entry/1 exit - plastic base						
Can be used for protection conductor inside class II equivalent assemblies						
50	0371 77	Green ●	4	0.25 to 6	0.25 to 4	6
40	0371 78	Green ●	6	0.5 to 10	0.25 to 6	8
PNE - Phase/Neutral/Earth						
3 connections on 3 levels - metal base						
Green/yellow marking for the lower level						
Screwless fixing on rail						
Colour	Nominal cross section (mm ²)	Rigid cable (mm ²)	Flexible cable (mm ²)			
50	0371 52 ²	Grey ●	2.5	0.25 to 4	0.25 to 2.5	5


CAB 3 marking system **p. 140-142**
 Starfix ferrules and crimping tools **p. 148-149**



1 : Built-in end cap
 2 : Cable capacity - 2.5 mm² max. only when used with bridging comb

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>

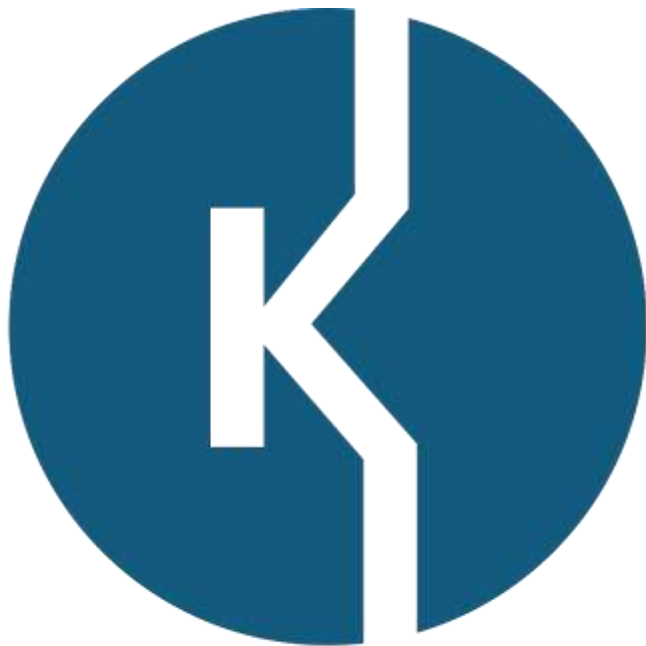

KEMPSTON
CONTROLS