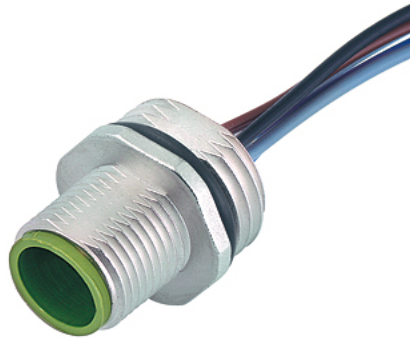


M12 male receptacle A-cod. front mount PP-wires 5x0,34 0,2m

Flange M12 male
with multi-strand wire
5-pole

Image

Vicarious picture


Form	13521	
Technical Data		
Operating voltage	max. 125 V AC/DC	
Operating current per contact	max. 4 A	
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing	
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)	
Temperature range	-25...+85 °C	
Cable		
No./diameter of wires	5 × 0.34 mm ²	
Wire isolation	PP (br, wh, bl, bk, gr)	
Outer diameter	approx. 3.4 mm	
Bend radius (moving)	10 x outer diameter	
Temperature range (fixed)	-40...+80 °C	
Commercial data		
Net weight	16	
Weight unit	Gram	
Basic unit	pc.	
Customs tariff number	85444290	
Unit (piece)	1	
Minimum order quantity (piece)	1	
Accessories	Hexagonal nut M16x1,5 for receptacle	Art.-No. 7000-13581-000000

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 10/14

Contact layout

Male

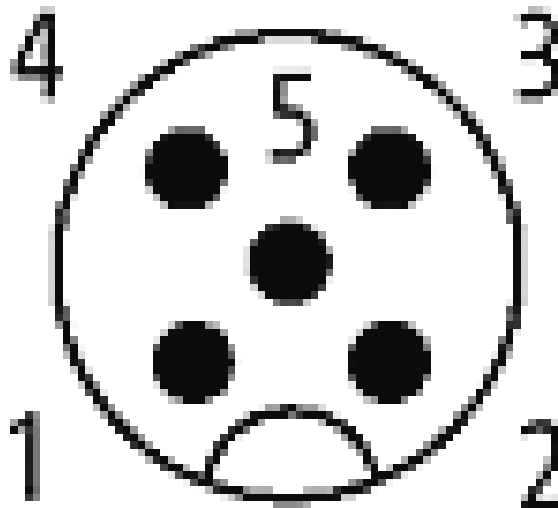

Circuit diagram

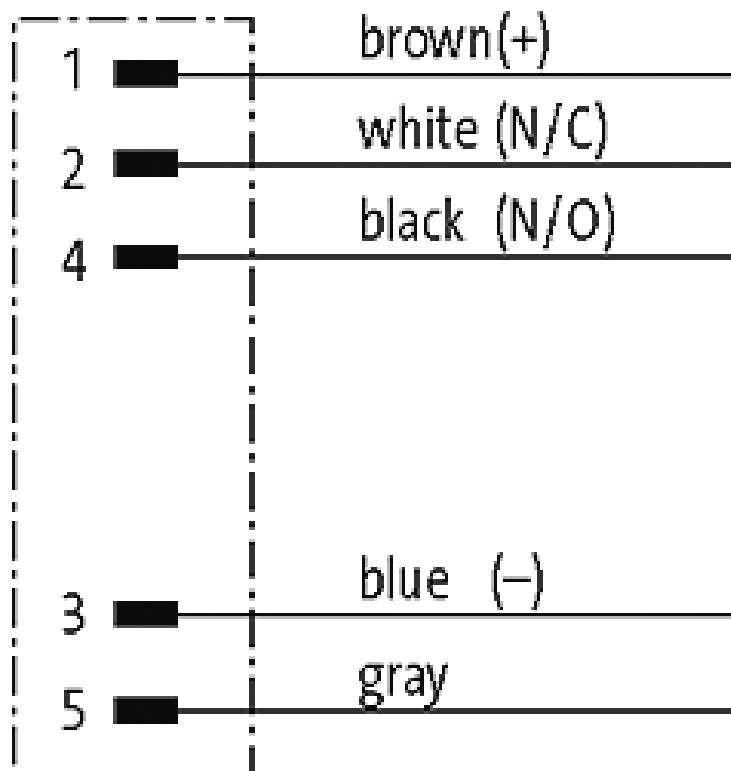

Dimension drawing

