



7300 10



7301 10



7300 18



7300 19



7301 20



7300 23



7300 29

Front plates : white thermoset  
Terminal screws captive and backed off ready for cabling  
Supplied with faceplate screw caps

Pack	Cat. Nos.	Double pole switches 20 A - 250 V <sup>1</sup>
		Conform to BS EN 60669-1 : 2000 Options available as standard with red 'power on' LED indicator LED 'power on' upgrade pack also available Use cord outlet accessory box Cat. No. 7300 53 for flush to wall external cord connection <b>p.38</b> Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm
10	7300 10	20 A DP
10	7301 10	20 A DP marked "WATER HEATER"
10	7300 14	20 A DP with cord outlet
10	7301 14	20 A DP with cord outlet marked "WATER HEATER"
10	7300 16	20 A DP with cord outlet + red LED power indicator
10	7301 16	20 A DP with cord outlet marked "WATER HEATER" + red LED power indicator
10	7300 12	20 A DP + red LED power indicator
10	7301 12	20 A DP marked "WATER HEATER" + red LED power indicator
10	7300 18	20 A sink/bath dual switch + red LED power indicator

Pack	Cat. Nos.	Cable outlet 20 A - 250 V <sup>1</sup>
		Conforms to BS 5733 : 1995 Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm
10	7300 19	20 A – with terminal block and outlet gland

### Red power indicator LED pack **p.38**

1 : Range of engraving available on most products, see table on **p.41**

Pack	Cat. Nos.	Double pole switches 45 A - 250 V <sup>1</sup>
		Conform to BS EN 60669-1 : 2000 Options available as standard with red 'power on' LED indicator LED 'power on' upgrade pack also available Flush mounting back box : min. 48 mm deep Nominal plate dimensions : 2 gang - 146 x 86 mm 1 gang - 86 x 86 mm
5	7300 20	45 A DP
5	7301 20	45 A DP with red rocker marked "COOKER"
5	7300 21	45 A DP + red LED power indicator
10	7300 22	45 A DP
10	7301 22	45 A DP with red rocker marked "COOKER"
10	7300 23	45 A DP + red LED power indicator

Pack	Cat. Nos.	Cooker control units 45 A - 250 V <sup>1</sup>
		Conform to BS 4177 : 1992 Options available as standard with red 'power on' LED indicator LED 'power on' upgrade pack also available 45 A - 250 V <sup>1</sup> double pole switch with 13 A - 250 V <sup>1</sup> double pole switched socket outlet Flush mounting back box : min. 48 mm deep Nominal plate dimensions : 86 x 146 mm
5	7300 28	DP with DP switched socket
5	7300 29	DP with DP switched socket + red LED power indicator


### Flush and surface mounting back boxes **p. 39**



Pack	Cat. Nos.	Cable outlet 45 A - 250 V <sup>1</sup>
		Conforms to BS 5733 : 1995 2 piece design for safety Flush mounting back box : min. 48 mm deep Nominal plate dimensions : 86 x 86 mm
5	7300 26	45 A – with terminal block

# Synergy® white

## TV, telephone and data sockets

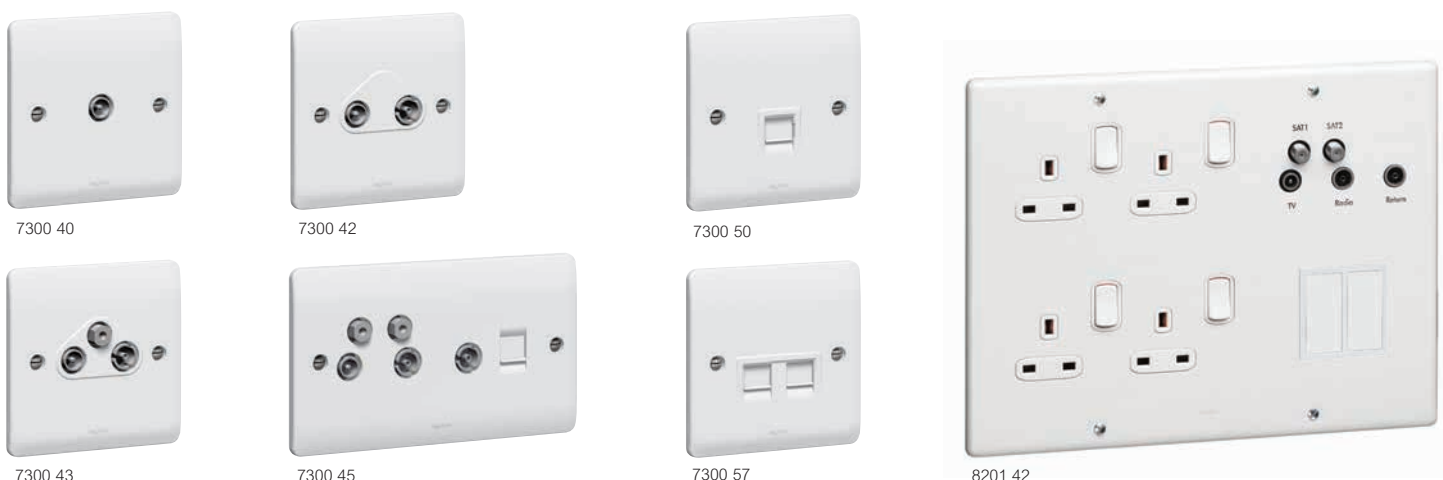

Front plates : white thermoset  
Supplied with faceplate screw caps

Pack	Cat. Nos.	TV, radio and satellite sockets
		Flush mounting back box : min. 35 mm deep Nominal plate dimensions : 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm
10	7300 40	Screened TV – single, male Non-isolated
10	7301 40	Screened TV – single, female Non-isolated
1	7300 41	Screened satellite – single, 'F' type
10	7300 42	Screened TV + FM Isolated
1	7300 43	Screened TV + FM + satellite, 'F' type
1	7300 45 <sup>1</sup>	Quad outlet, TV, radio + 2 satellite + TV return with secondary telephone outlet

Pack	Cat. Nos.	Telephone sockets
		Shuttered Flush mounting back box : min. 35 mm deep Nominal plate dimensions : 86 x 86 mm
10	7300 50 <sup>1</sup>	Single master
10	7300 51 <sup>1</sup>	Single secondary
10	7300 54	Single RJ11/12

Pack	Cat. Nos.	Data sockets
		CAT 6 compliant UTP Rapid cable connection Flush mounting back box : min. 35 mm deep Nominal plate dimensions : 86 x 86 mm
1	7300 56	RJ45 – single
1	7300 57	RJ45 – double
<b>Also available :</b> Euro module plates for 25 x 50 mm data modules <b>p.38</b>		

Pack	Cat. Nos.	Media plate (monobloc)
		Comprising : • 2 x independent satellite feeds • 1 x terrestrial TV socket suitable for analogue and digital signals • 1 x video return • 1 gang x 2 modules Arteur carrier plate with blanks, suitable for Arteur mechanisms (telephone, HDMI, RJ45, RCA) • 2 x Synergy 2 gang switched double pole 13 A sockets To be used with back box Cat. No. 8204 88 (see below) Nominal plate dimensions : 206 x 267 mm
1	8201 42	White (metal)

Pack	Cat. Nos.	Back box for media plate
		Dimensions : 194 x 254 x 35 mm With phase barrier Material : grey epoxy coated steel
1	8204 58	35 mm deep box

Flush and surface mounting  
back boxes **p. 39**



1 : Not suitable for use in the ROI

Download the full file at

<http://assets.kempstoncontrols.com/doc/Synergy%20Wiring%20Accessories.pdf>



**KEMPSTON**  
CONTROLS