

# Synergy® traditional socket outlets



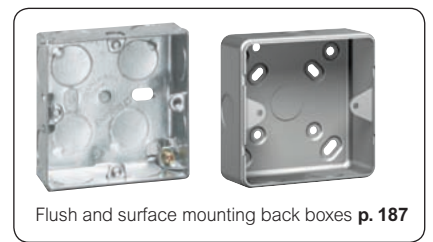
7330 70



7332 61



7330 97

Flush and surface mounting back boxes **p. 187**

7330 71



7332 74



7330 89



7332 59



Red LED power indicator

Brushed stainless steel front plates : brushed stainless steel with clear epoxy satin lacquer coating  
 Polished stainless steel front plates : electroplated stainless steel plate with trivalent chrome for mirror finish  
 White interiors and rockers  
 Terminal screws captive and backed off ready for cabling

Pack	Cat. Nos.								
			<b>Double pole socket outlets 13 A - 250 V~</b>						
			Conform to BS 1363 - Part 2 : 1995 2 earth terminals Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 60	7332 60	1 gang – switched						
1	7330 61	7332 61	1 gang – switched + red LED power indicator						
1	7330 70	7332 70	2 gang – switched						
1	7330 71	7332 71	2 gang – switched + red LED power indicator						
1	7330 74	7332 74	2 gang – switched outboard for standard and clean earth applications						

Pack	Cat. Nos.								
			<b>Unswitched socket outlets 13 A - 250 V~</b>						
			Conform to BS 1363 - Part 2 : 1995 2 earth terminals Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 1 gang - 86 x 86 mm 2 gang - 86 x 146 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 65	7332 65	1 gang – unswitched						
1	7330 75	7332 75	2 gang – unswitched						

Pack	Cat. Nos.								
			<b>Key switched socket 13 A - 250 V~</b>						
			Conform to BS 1363 - part 2 : 1995 Flush mounting back box : min. 35 mm deep Nominal plate dimensions : 86 x 146 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	8200 71	8200 72	2 gang single socket with DP key switch						

Pack	Cat. Nos.								
			<b>RCD sockets 13 A - 250 V~</b>						
			Conform to BS 7288 : 1990 and BS 1363 - Part 2 : 1995 Conventional earth pin release shutter Maximum operating current 16 A Incorporate a "test and reset" button Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 146 mm						
			<b>Active (electronically latched)</b> - trips in the event of a power failure - suitable in applications where automatic restoration of supply would be hazardous, e.g. machinery, power tools						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 97	7332 97	RCD unit 2 gang DP 30 mA active						
			<b>Passive (mechanically latched)</b> - does not trip in the event of a power failure - suitable in applications where automatic restoration of supply is required, e.g. fridge, freezer, unmanned areas						
1	7330 98	7332 98	RCD unit 2 gang DP 30 mA passive						

Pack	Cat. Nos.								
			<b>Socket outlets 15 A - 250 V~</b>						
			Conform to BS 546 : 1950 Flush mounting back box : min. 35 mm deep Nominal plate dimensions : 86 x 86 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 88	7332 88	1 gang – unswitched						
1	7330 89	7332 89	1 gang – switched						

Pack	Cat. Nos.								
			<b>Socket outlets 2 A - 250 V~</b>						
			Conform to BS 546 : 1950 Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm						
			<table border="0"> <tr> <td colspan="2">Stainless steel</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Brushed</td> <td>Polished</td> </tr> </table>	Stainless steel				Brushed	Polished
Stainless steel									
Brushed	Polished								
1	7330 59	7332 59	1 gang – unswitched						

# Synergy® traditional

socket outlets (continued) and fused connection units



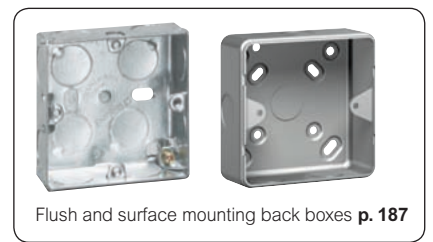
7330 68



7330 35



7332 30

Flush and surface mounting back boxes **p. 187**

7330 69



7330 90



7330 37



7332 32



Red LED power indicator

Brushed stainless steel front plates : brushed stainless steel with clear epoxy satin lacquer coating  
 Polished stainless steel front plates : electroplated stainless steel plate with trivalent chrome for mirror finish  
 White interiors and rockers  
 Terminal screws captive and backed off ready for cabling

Pack	Cat. Nos.		Socket outlets 5 A - 250 V~
	Stainless steel Brushed      Polished		Conform to BS 546 : 1950 Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm
1	7330 68	7332 68	1 gang – unswitched
1	7330 69	7332 69	1 gang – switched

Pack	Cat. Nos.		Shaver sockets
	Stainless steel Brushed      Polished		Conform to BS EN 61558-2-5 : 1998 IP 24 For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box : min. 47 mm deep Nominal plate dimensions : 146 x 86 mm
1	7330 90	7332 90	Supply : 230 V - 50/60 Hz Output : 230/120 V - 20 VA max.

Pack	Cat. Nos.		Fused connection units 13 A - 250 V~
	Stainless steel Brushed      Polished		Conform to BS 1363 - Part 4 : 1995 Fuse drawer retained by quarter turn catch, drawer padlockable in open position for safety Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm
			<b>Switched</b>
1	7330 34	7332 34	Switched, DP
1	7330 35	7332 35	Switched, DP with red LED power indicator
1	7330 36	7332 36	Switched, DP with cord outlet
1	7330 37	7332 37	Switched, DP with cord outlet + red LED power indicator
			<b>Unswitched</b>
1	7330 30	7332 30	Unswitched
1	7330 31	7332 31	Unswitched with red LED power indicator
1	7330 32	7332 32	Unswitched with cord outlet
1	7330 33	7332 33	Unswitched with cord outlet + red LED power indicator

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Wiring%20Devices%202012.pdf>



**KEMPSTON**  
CONTROLS