


Viking™ 3 accessories for terminal blocks



End stop 0 375 10, screwless mounting

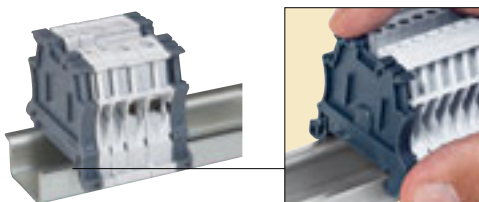

0 375 11 with label holder 0 395 96

0 375 12 with CAB 3 labelling

0 375 13 with label holder Duplix 0 384 98




Technical characteristics p. 309

Pack Cat.Nos Rails for cutting to length

Pack	Cat.Nos	Rails for cutting to length
10	0 374 04	Length 2 m
10	0 374 07	EN 60715 depth 7.5 mm
10	0 477 22	depth 15 mm
10	0 477 23	depth 7.5 mm with oblong holes
10	0 477 23	depth 15 mm with oblong holes


Pack	Cat.Nos	45° mounting bracket
10	0 394 49	Set of 2 supports for 45° rail slope Supplied with 4 M6 screws, nuts and washers



Pack	Cat.Nos	Adaptor
20	0 364 66	For mounting on rail equipment fitting on rail Width 17 mm Increase equipment height for 6 mm



Pack	Cat.Nos	End stops
50	0 375 10	Accept CAB 3 markers Automatic 6 mm pitch Screwless mounting For rails depth 15 mm and EN 60715 depth 7.5 mm and 15 mm Accepts label holder Cat.No 0 395 96 Acts as end cap for screw terminal blocks 1 entry/1 outlet 5, 6, 8 and 10 mm pitch
20	0 375 11	8 mm pitch For rails depth 15 mm and EN 60715 depth 7.5 mm and 15 mm Accepts label holder Cat.No 0 395 96
10	0 375 12	10 mm pitch For rails depth 15 mm and EN 60715 depth 7.5 mm (except for rail fixed on plate) and 15 mm For supporting protection or shielding bar: - Brass bar Cat.Nos 0 373 00/01 - Copper bar 12 x 4 mm with clamps Cat.No 0 373 02 - IP 2X terminal block with flat steel bar 12 x 2 mm Cat.No 048 19 - Copper bar 12 x 4 mm Cat.No 373 49 or 373 89 - Shielding bar 10 x 3 mm Cat.No 375 34
20	0 375 13	12 mm pitch For rails EN 60715, depth 15 mm and EN 60715 depth 7.5 mm and 15 mm After cutting out the upper divider, can be labelled using Duplix label holder Cat.No 0 384 98



Pack Cat.Nos Identification accessories

20	0 395 96	Transparent label holder with variable angle Fixing on end stops Cat.Nos 375 10/11 Supplied with label 32 x 9.5 mm Can take label Cat.No 395 97
20	0 395 97	Label for engraving 28 x 9.5 mm For label holder Cat. No 395 96. Flexible ABS
10	0 395 98	White background, black engraving Black felt tip pen for permanent marking



Pack	Cat.Nos	End caps
100	0 375 50	Grey
20	0 375 51	For screw terminal blocks 1 entry/1 outlet 5, 6, 8 and 10 mm pitch
20	0 375 52	1 entry/1 outlet 12 and 15 mm pitch
20	0 375 53	2 entries/2 outlets
20	0 375 54	2 levels
20	0 375 55	3 levels
20	0 375 56	Disconnect type 6 mm pitch and function blocks 5 mm pitch
10	0 375 57	Disconnect type fuse cartridge 5 x 20 and 6.3 x 32 with screwed plug Disconnect for measurement
50	0 375 86	For spring terminal blocks with 5 mm pitch Allows the block to become 6 mm pitch and take a flexible wire fitted with a 4 mm ² ferrule (p.312)
50	0 375 87	1 entry/1 outlet
20	0 375 88	1 entry/2 outlets
20	0 375 89	2 entries/2 outlets
20	0 375 89	2 levels
20	0 375 90	For spring terminal blocks with 6 mm pitch Disconnect type

