


cylindrical cartridge fuses

HRC (continued)

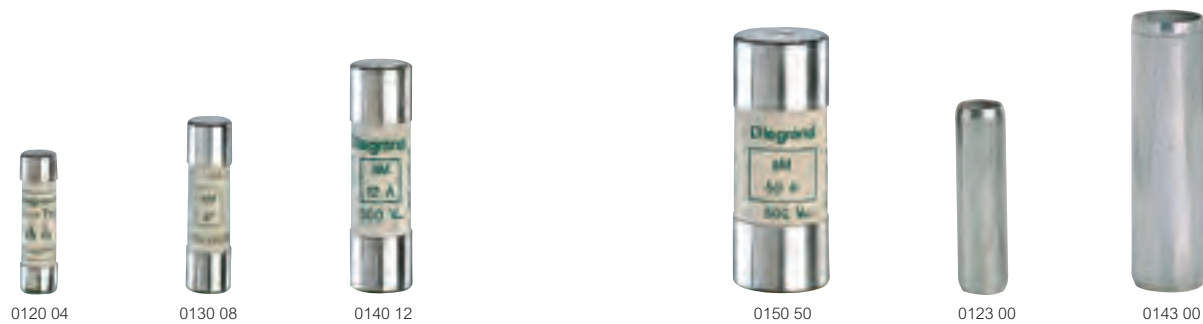

Dimensions p. 79

Numbers refer to physical size of fuse i.e. 10 x 38 means Ø 10 mm x 38 mm length


| Pack | Cat. Nos. | Cylindrical type aM (motor rated) | | |
|------|----------------------|--|-------------------|--------------------------|
| | | Conform to BS EN 60269-1 (BS 88) IEC 60269-1 Bureau Veritas approved | | |
| | | Rating (Amps) | Voltage ~ (Volts) | Breaking capacity (Amps) |
| | Without indicator | 8 x 32 | | |
| 10 | 0120 02 | 2 | 400 | 20 000 |
| 10 | 0120 04 | 4 | | |
| 10 | 0120 06 | 6 | | |
| 10 | 0120 10 | 10 | | |
| | | HRC (high rupturing capacity) Conform to BS EN 60269-1 and IEC 60269-1, 2 and 2-1 Bureau Veritas approved | | |
| | Without indicator | 10 x 38 HRC | | |
| 10 | 0130 95 | 0.5 | 500 | 100 000 |
| 10 | 0130 01 | 1 | | |
| 10 | 0130 02 | 2 | | |
| 10 | 0130 04 | 4 | | |
| 10 | 0130 06 | 6 | | |
| 10 | 0130 08 | 8 | | |
| 10 | 0130 10 | 10 | | |
| 10 | 0130 12 | 12 | | |
| 10 | 0130 16 | 16 | | |
| 10 | 0130 20 ¹ | 20 | | |
| 10 | 0130 25 ¹ | 25 | 400 | |
| | Without striker | 14 x 51 HRC | | |
| 10 | 0140 04 | 4 | 500 | 100 000 |
| 10 | 0140 06 | 6 | | |
| 10 | 0140 10 | 10 | | |
| 10 | 0140 12 | 12 | | |
| 10 | 0140 16 | 16 | | |
| 10 | 0140 20 | 20 | | |
| 10 | 0140 25 | 25 | | |
| 10 | 0140 32 | 32 | | |
| 10 | 0140 40 | 40 | | |
| 10 | 0140 45 ² | 45 | | |
| 10 | 0140 50 ² | 50 | 400 | |

| Pack | Cat. Nos. | Cylindrical type aM (motor rated) (continued) | | |
|------|----------------------|--|-------------------|--------------------------|
| | | HRC (high rupturing capacity) Conform to BS EN 60269-1 (BS 88) IEC 60269-1, 2 and 2-1 Bureau Veritas approved | | |
| | | Rating (Amps) | Voltage ~ (Volts) | Breaking capacity (Amps) |
| | Without striker | 22 x 58 HRC | | |
| 10 | 0150 32 | 32 | 500 | 100 000 |
| 10 | 0150 40 | 40 | | |
| 10 | 0150 50 | 50 | | |
| 10 | 0150 63 | 63 | | |
| 10 | 0150 80 | 80 | | |
| 10 | 0150 96 | 100 | | |
| 10 | 0150 97 ² | 125 | | |
| | | Neutral links | | |
| 10 | 0123 00 | 8 x 32 | | |
| 10 | 0133 00 | 10 x 38 | | |
| 10 | 0143 00 | 14 x 51 | | |
| 10 | 0153 00 | 22 x 58 | | |

1 : Overrating not described by standards
2 : Overrating described by standards

HRC blade type cartridge fuses

gG/aM type

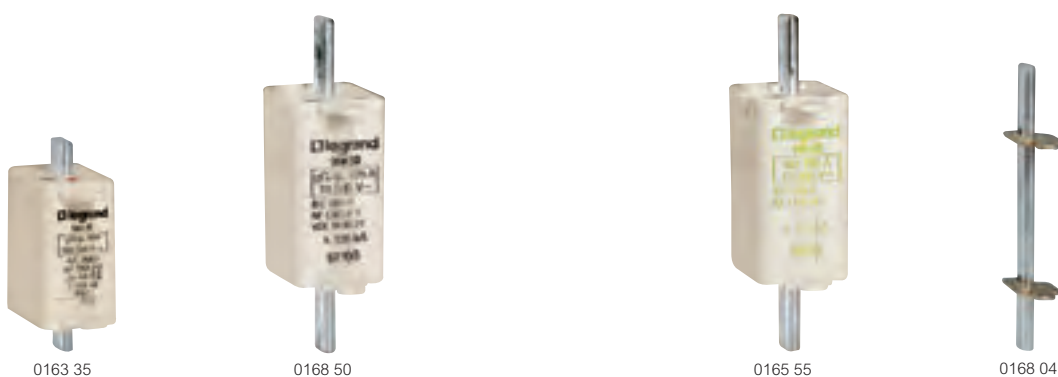

Dimensions p. 79

| Pack | Cat. Nos. | Type gG (IEC)/gL (VDE) | | |
|------|----------------------|--|-------------------|--------------------------|
| | | HRC (high rupturing capacity) Conform to BS EN 60269-1 and 2, IEC 60269-1,2 and 2-1, VDE 0636-21 Bureau Veritas approved Fully insulated end plate and handle lugs | | |
| | With indicator | Rating (Amps) | Voltage ~ (Volts) | Breaking capacity (Amps) |
| | | Size 00 | | |
| 10 | 0163 18 | 25 | 500 | 120 000 |
| 10 | 0163 20 | 32 | | |
| 10 | 0163 25 | 40 | | |
| 10 | 0163 30 | 50 | | |
| 10 | 0163 35 | 63 | | |
| 10 | 0163 40 | 80 | | |
| 10 | 0163 45 | 100 | | |
| 10 | 0163 50 | 125 | | |
| 10 | 0163 55 | 160 | | |
| | | Size 0 | | |
| 3 | 0168 45 | 100 | 500 | 120 000 |
| 3 | 0168 50 | 125 | | |
| 3 | 0168 55 | 160 | | |
| 3 | 0168 60 ¹ | 200 | | |
| | | Size 1 | | |
| 3 | 0173 50 | 125 | 500 | 120 000 |
| 3 | 0173 55 | 160 | | |
| 3 | 0173 60 | 200 | | |
| 3 | 0173 65 | 250 | | |
| | | Size 2 | | |
| 3 | 0178 60 | 200 | 500 | 120 000 |
| 3 | 0178 65 | 250 | | |
| 3 | 0178 70 | 315 | | |
| 3 | 0178 75 | 400 | | |

| Pack | Cat. Nos. | Type aM (motor rated) | | |
|------|----------------|--|-------------------|--------------------------|
| | | HRC (high rupturing capacity) Conform to BS EN 60269-1 and 2, IEC 60269-1,2 and 2-1, VDE 0636-21 Bureau Veritas approved Fully insulated end plate and handle lugs | | |
| | With indicator | Rating (Amps) | Voltage ~ (Volts) | Breaking capacity (Amps) |
| | | Size 00 | | |
| 3 | 0160 25 | 40 | 500 | 120 000 |
| 3 | 0160 30 | 50 | | |
| 3 | 0160 35 | 63 | | |
| 3 | 0160 40 | 80 | | |
| 3 | 0160 45 | 100 | | |
| 3 | 0160 50 | 125 | | |
| | | Size 0 | | |
| 3 | 0165 35 | 63 | 500 | 120 000 |
| 3 | 0165 40 | 80 | | |
| 3 | 0165 45 | 100 | | |
| 3 | 0165 50 | 125 | | |
| 3 | 0165 55 | 160 | | |
| | | Size 1 | | |
| 3 | 0170 50 | 125 | 500 | 120 000 |
| 3 | 0170 55 | 160 | | |
| 3 | 0170 60 | 200 | | |
| 3 | 0170 65 | 250 | | |
| | | Size 2 | | |
| 3 | 0175 60 | 200 | 500 | 120 000 |
| 3 | 0175 65 | 250 | | |
| 3 | 0175 70 | 315 | | |

| Pack | Cat. Nos. | Neutral blades |
|------|-----------|----------------|
| 1 | 0168 04 | Size 0 |
| 1 | 0173 04 | Size 1 |
| 1 | 0178 04 | Size 2 |
| 1 | 0181 04 | Size 3 |

| Pack | Cat. Nos. | Handle |
|------|-----------|--------------------------------|
| 5 | 0199 02 | Removable handle for all sizes |

1 : Overrating not described by standards

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



KEMPSTON
CONTROLS