


# Lina 25™ cable ducting



Manually separable trunking

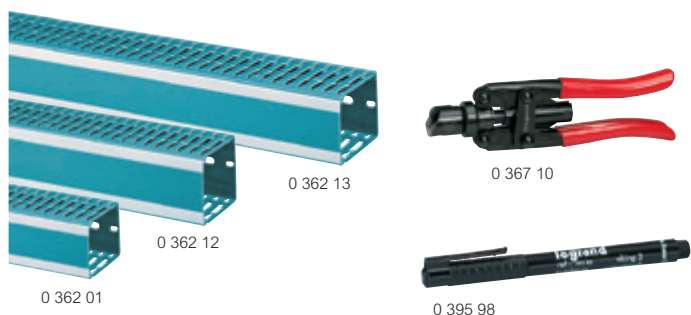

Tabs can be separated using pliers  
Cat.No 0 367 10

Technical characteristics p. 329  
Approvals p. 906

Pack	Cat.Nos	Lina 25 ducting	
		RAL 2525 blue PVC Conform to EN 50085-2-3 Side perforations at intervals of 12.5 mm Length: 2 m Width x height (mm)	
60 <sup>1</sup>	0 362 00	25 x 25	
56 <sup>1</sup>	0 362 01	25 x 40	
56 <sup>1</sup>	0 362 02	25 x 60	
40 <sup>1</sup>	0 362 03	25 x 80	
56 <sup>1</sup>	0 362 05	40 x 25	
48 <sup>1</sup>	0 362 06	40 x 40	
48 <sup>1</sup>	0 362 07	40 x 60	
40 <sup>1</sup>	0 362 08	40 x 80	
32 <sup>1</sup>	0 362 11	60 x 40	
32 <sup>1</sup>	0 362 12	60 x 60	
32 <sup>1</sup>	0 362 13	60 x 80	
24 <sup>1</sup>	0 362 16	80 x 60	
24 <sup>1</sup>	0 362 17	80 x 80	
16 <sup>1</sup>	0 362 25	120 x 80	


Pack	Cat.Nos	Lina 25 cutter tool	
1	0 367 10	For a straight break with fingers	

		Sleeving	
		<b>Braided sleeving</b> Black polyester Supplied in 50 m roll in dispenser box with an indicator 3 m before end	
		Ø of roll	Ø variations
1	0 366 38	20 mm	10 to 30 mm
1	0 366 39	30 mm	18 to 54 mm
		<b>Spiral sleeving</b> Colourless	
25	6 361 78	Ø12 mm	
25	6 361 83	Ø22 mm	



Pack	Cat.Nos	Black felt-tip pen	
10	0 395 98	Black felt-tip pen indelible for marking	

Pack	Cat.Nos	Linafix isolating fixing accessories	
20	0 367 00	Material polyamide 6/6 Enable fixing of cable ducting on any support by 1/4 turn On chassis-rail Holds the ducting in place vertically	
100	0 366 40	On rails □, □ 15 mm depth 1/4 turn	
20	0 366 41	On Lina 25 perforated plates Clip-on 1/4 turn	
20	0 366 42	On door Fits under control and signalling auxiliaries Osmoz (Ø22) Also enables direct fixing of test-lamps	
10	0 366 43	On Lina 25 uprights Double adjustment to enable alignment with the perforations at the bottom of cable ducting Can be used to fix vertical or horizontal ducting (possible reinforcement with rail 2, 15 mm depth)	
100	0 366 46	To be clipped on On plain plates plastic rivet length 12 mm for solid plates up to 30 / 10 <sup>th</sup> Drilling Ø: 5.5 to 6 mm	
500	0 366 44	On plain plates, Lina 12.5 and perforated plates, Lina 25 for cabinets Reinforced plastic rivet Ø6 mm Drilling Ø: 6.5 mm	
100	0 347 45	Screw caps H 4.8 x 16 mm self-drilling, self-tapping for Ø3.3 mm	
200	0 347 50	Screw cover, for isolating screws head Cat.No 0 347 45 inside the trunking	
50	0 367 01	Cable retainer To clip-on the fingers	

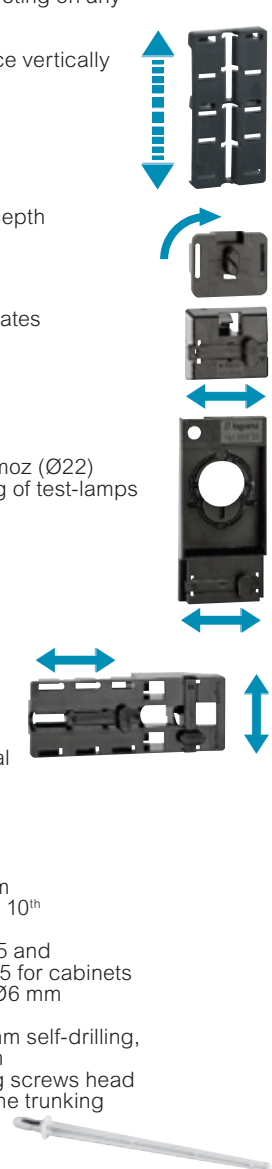

1: Number of metres in pack