



Figure similar

SIRIUS safety relay with relay enabling circuits (EC) 24 V DC, 45 mm overall width Screw terminal EC instantaneous: 2 NO EC delayed: 2NO, 0.5...30 s SC: 1NC AUTOSTART Basic device Maximum achieved SIL: 3/2, PL: e/d

General technical data	
product brand name	SIRIUS
product designation	safety relays
design of the product	für Schutztüren
protection class IP of the enclosure	IP20
protection class IP of the terminal	IP20
touch protection against electrical shock	finger-safe
insulation voltage rated value	300 V
ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
air pressure acc. to SN 31205	90 ... 106 kPa
relative humidity during operation	10 ... 95 %
installation altitude at height above sea level maximum	2 000 m
vibration resistance acc. to IEC 60068-2-6	5 ... 500 Hz: 0,075 mm
shock resistance	8g / 10 ms
surge voltage resistance rated value	4 000 V
EMC emitted interference	EN 60947-5-1
installation environment regarding EMC	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	KT
reference code acc. to DIN EN 61346-2	F
number of sensor inputs	
• 1-channel or 2-channel	1
design of the cascading	none
type of the safety-related wiring of the inputs	single-channel and two-channel
product feature cross-circuit-proof	Yes
Safety Integrity Level (SIL)	
• acc. to IEC 61508	3
• for delayed release circuit acc. to IEC 61508	SIL2
SIL Claim Limit (subsystem) acc. to EN 62061	3
performance level (PL)	
• acc. to EN ISO 13849-1	e
• for delayed release circuit acc. to EN ISO 13849-1	d
category acc. to EN ISO 13849-1	4
hardware fault tolerance acc. to IEC 61508	1

<b>safety device type acc. to IEC 61508-2</b>	Type A
<b>PFHD with high demand rate acc. to EN 62061</b>	0.0000000027 1/h
<b>Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508</b>	0.0000024 1/y
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>number of outputs as contact-affected switching element</b>	
• as NC contact	
— for signaling function instantaneous contact	1
• as NO contact	
— safety-related instantaneous contact	2
— safety-related delayed switching	2
<b>number of outputs as contact-less semiconductor switching element</b>	
• safety-related	
— delayed switching	0
— instantaneous contact	0
• for signaling function	
— delayed switching	0
— instantaneous contact	0
<b>stop category acc. to DIN EN 60204-1</b>	0 + 1
<b>Inputs</b>	
<b>design of input</b>	
• cascading input/functional switching	No
• feedback input	Yes
• start input	Yes
<b>Outputs</b>	
<b>type of electrical connection plug-in socket</b>	Yes
<b>operating frequency maximum</b>	1 000 1/h
<b>switching capacity current</b>	
• of the NO contacts of the relay outputs for delayed release circuit	
— at AC-15 at 230 V	3 A
— at DC-13 at 24 V	2 A
• of the NO contacts of the relay outputs for instantaneous enabling circuit	
— at AC-15 at 230 V	5 A
— at DC-13 at 24 V	5 A
<b>thermal current of the switching element with contacts maximum</b>	5 A
<b>electrical endurance (switching cycles) typical</b>	100 000
<b>mechanical service life (switching cycles) typical</b>	10 000 000
<b>design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required</b>	gL/gG: 6 A, or quick: 10 A
<b>DC resistance of the cable maximum</b>	30 Ω
<b>wire length between sensor and electronics evaluation device with Cu 1.5 mm² and 150 nF/km maximum</b>	1 000 m
<b>make time with automatic start</b>	
• at DC maximum	80 ms
<b>backslide delay time in the event of power failure</b>	
• maximum	100 ms
<b>adjustable OFF-delay time after opening of the safety circuits</b>	0.5 ... 30 s
<b>recovery time after power failure typical</b>	1 s
<b>pulse duration</b>	
• of the sensor input minimum	25 ms
• of the ON pushbutton input minimum	0.025 s
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage 1</b>	

<ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>	24 V
<b>operating range factor control supply voltage rated value of magnet coil</b>	
<ul style="list-style-type: none"> <li>• at AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> <li>• at DC</li> </ul>	0.85 ... 1.1 0.85 ... 1.1 0.85 ... 1.1
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting
<b>width</b>	44.8 mm
<b>height</b>	138.5 mm
<b>depth</b>	120 mm
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded <ul style="list-style-type: none"> <li>— with core end processing</li> </ul> </li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<b>type of connectable conductor cross-sections at AWG cables</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	2x (20 ... 14)
<ul style="list-style-type: none"> <li>• stranded</li> </ul>	2x (20 ... 14)
<b>Product Function</b>	
<b>product function</b>	
<ul style="list-style-type: none"> <li>• light barrier monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• standstill monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• protective door monitoring</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• automatic start</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• magnetically operated switch monitoring NC-NO</li> </ul>	No
<ul style="list-style-type: none"> <li>• rotation speed monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• laser scanner monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• monitored start-up</li> </ul>	No
<ul style="list-style-type: none"> <li>• light array monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• magnetically operated switch monitoring NC-NC</li> </ul>	No
<ul style="list-style-type: none"> <li>• EMERGENCY OFF function</li> </ul>	No
<ul style="list-style-type: none"> <li>• pressure-sensitive mat monitoring</li> </ul>	Yes
<b>suitability for interaction press control</b>	No
<b>suitability for use</b>	
<ul style="list-style-type: none"> <li>• monitoring of floating sensors</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• monitoring of non-floating sensors</li> </ul>	No
<ul style="list-style-type: none"> <li>• safety switch</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• position switch monitoring</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• EMERGENCY-OFF circuit monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• valve monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• tactile sensor monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• magnetically operated switch monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• safety-related circuits</li> </ul>	Yes
<b>Certificates/ approvals</b>	
<b>certificate of suitability</b>	BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508
<ul style="list-style-type: none"> <li>• TÜV (German technical inspectorate) certificate</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• UL approval</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• BG BIA approval</li> </ul>	Yes
<b>General Product Approval</b>	
EMC	



Functional Safety/Safety of Machinery	Test Certificates	other
---------------------------------------	-------------------	-------

[Type Examination Certificate](#)

[Special Test Certificate](#)

[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2828-1BB40>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2828-1BB40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TK2828-1BB40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TK2828-1BB40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TK2828-1BB40&lang=en)

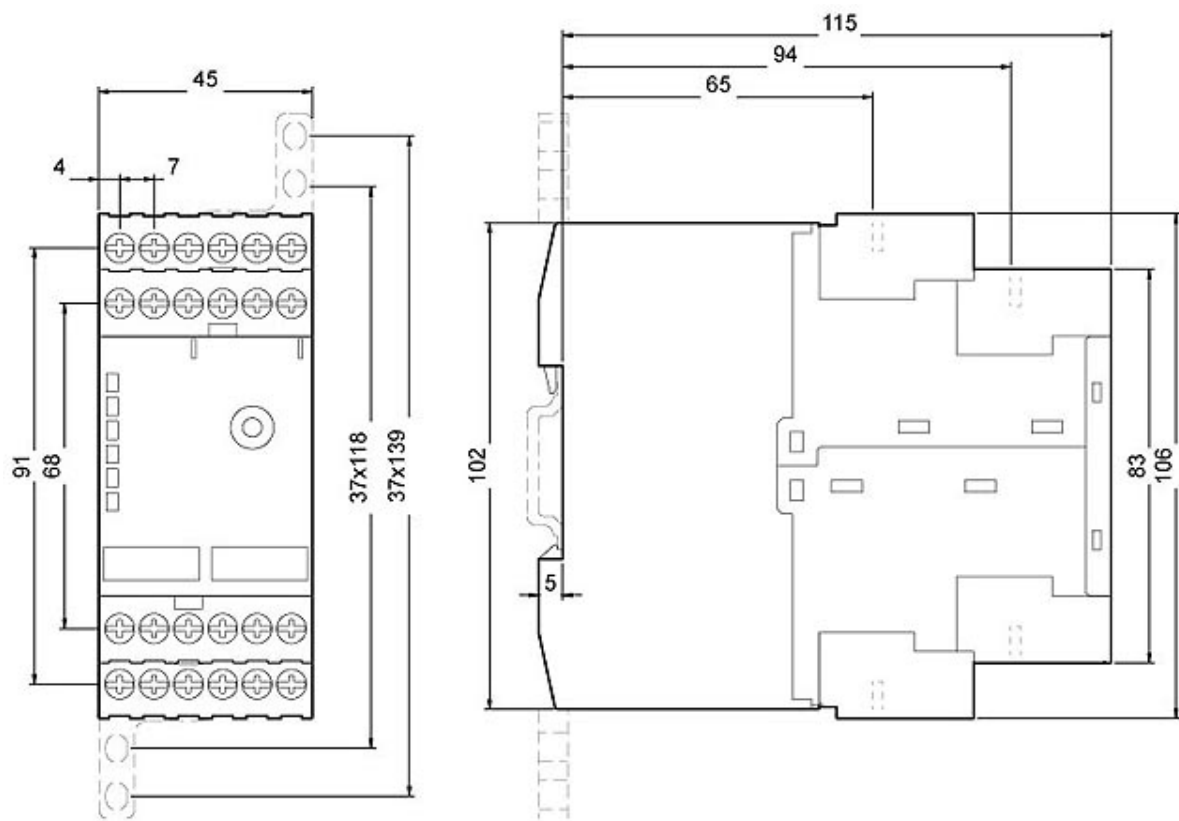

last modified:

1/26/2022