

P 17 Tempra Pro IP 44 - LV 16 and 32 A

selection chart

<p>Conform to : BS EN 60309-1, IEC 60309-1, BS EN 60309-2 and IEC 60309-2 IP 44 according to BS EN 60529 and IEC 60529 IK 09 according to BS EN 62262 and IEC 62262 Material : polyamide 6 or plastic (see p. 179 for details) Self-extinguishing : 850 °C (support of active parts) / 650 °C (plastic housing)</p> <p> Technical information and dimensions p. 180-181</p>			FUNCTIONS														
			PANEL MOUNTING SOCKETS INCLINED OUTLET	PANEL MOUNTING SOCKETS STRAIGHT OUTLET	SURFACE MOUNTING SOCKETS	MOBILE SOCKETS	STRAIGHT PLUGS	APPLIANCE INLETS									
<p>NEW</p>			<p>NEW</p>			<p>NEW</p>			<p>NEW</p>			<p>NEW</p>					
LV																	
100 to 130 V 50/60 Hz	16 A	2 P + \perp	5551 81	0573 51 ²	5551 51	5551 01	5551 21	0575 81 ¹									
	32 A	2 P + \perp	5552 81	–	5552 51	5552 11	5552 31	0582 81 ¹									
200 to 250 V 50/60 Hz	16 A	2 P + \perp	5551 84	0573 54 ²	5551 54	5551 04	5551 24	0575 84 ¹									
	32 A	2 P + \perp	5552 84	0580 54 ²	5552 54	5552 14	5552 34	0582 84 ¹									
380 to 415 V 50/60 Hz	16 A	3 P + \perp	5551 88	0573 58 ²	5551 58	5551 08	5551 28	0575 88 ¹									
		3 P + N + \perp	5551 89	0573 59 ²	5551 59	5551 09	5551 29	0575 89 ¹									
	32 A	3 P + \perp	5552 88	0580 58 ²	5552 58	5552 18	5552 38	0582 88 ¹									
		3 P + N + \perp	5552 89	0580 59 ²	5552 59	5552 19	5552 39	0582 89 ¹									
<p>1 : Appliance inlet covers not supplied, see p. 179 2 : Panel mounting sockets (straight outlet) and appliance inlets are P17 Tempra items which are manufactured from plastic For pack quantities, see p. 179</p>																	

ADAPTOR

Conform to BS EN 60309-1,
BS EN 60309-2, IEC 60309-1
and IEC 60309-2
Self-extinguishing : 850 °C
Temp. rating : -15 °C to +40 °C


Dimensions
p. 181

16 A – 230 V

	Pack	Cat. No.
IEC 2 P + \perp plug – 13 A 2 P + \perp B.S. socket	10	0521 01

P 17 Tempra Pro IP 44 - LV 16 and 32 A

sockets, mobile sockets, plugs and appliance inlets

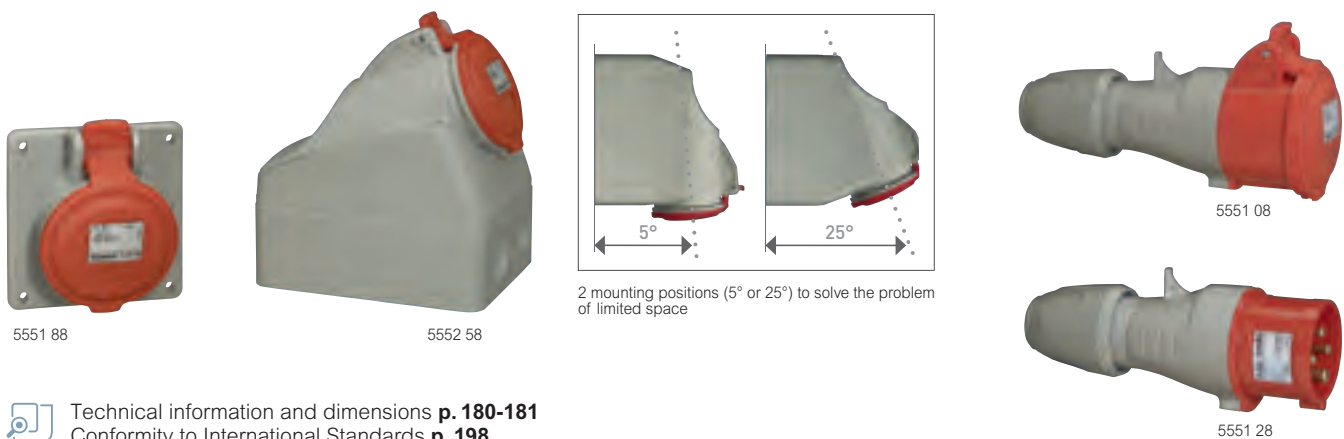

Technical information and dimensions **p. 180-181**
 Conformity to International Standards **p. 198**

Conform to BS EN 60309-1, IEC 60309-1, BS EN 60309-2 and IEC 60309-2
 IP 44 according to BS EN 60529 and IEC 60529
 IK 09 according to BS EN 62262 and IEC 62262
 Material : polyamide 6 or plastic (see below)
 Self-extinguishing : 850 °C (support of active parts) / 650 °C (plastic housing)

Pack	Cat. Nos.	Panel mounting sockets inclined outlet	Pack	Cat. Nos.	Mobile sockets
		NEW Material : polyamide 6 Can be fixed on plain faceplates or pre-drilled (p. 195)			NEW Material : polyamide 6 Cable clamping and closing without screws Supplied unlocked
	IP 44			IP 44	
	16 A 32 A			16 A 32 A	
5	5551 81 5552 81	100/130 V~ 2 P + ⊥	10 5	5551 01 5552 11	100/130 V~ 2 P + ⊥
10	5551 84 5552 84	200/250 V~ 2 P + ⊥	10	5551 04 5552 14	200/250 V~ 2 P + ⊥
10	5551 88 5552 88	380/415 V~ 3 P + ⊥	10	5551 08 5552 18	380/415 V~ 3 P + ⊥
10	5551 89 5552 89	3 P + N + ⊥	10	5551 09 5552 19	3 P + N + ⊥
		Panel mounting sockets straight outlet small flange¹ Material : plastic Can be fixed only on plain faceplates Cat. No. 0577 15 (p. 195)			Straight plugs Material : polyamide 6 Cable clamping and closing without screws Supplied unlocked
	IP 44			IP 44	
	16 A 32 A			16 A 32 A	
5	0573 51 0580 51	100/130 V~ 2 P + ⊥	10 5	5551 21 5552 31	100/130 V~ 2 P + ⊥
5	0573 54 0580 54	200/250 V~ 2 P + ⊥	10	5551 24 5552 34	200/250 V~ 2 P + ⊥
5	0573 58 0580 58	380/415 V~ 3 P + ⊥	10	5551 28 5552 38	380/415 V~ 3 P + ⊥
5	0573 59 0580 59	3 P + N + ⊥	10	5551 29 5552 39	3 P + N + ⊥
		Surface mounting sockets Material : polyamide 6 Two possible angles (5° or 25°)			Appliance inlets¹ Material : plastic Covers not supplied with product For appliance inlet covers, see below
	IP 44			IP 44	
	16 A 32 A			16 A 32 A	
5	5551 51 5552 51	100/130 V~ 2 P + ⊥	10	0575 81 0582 81	100/130 V~ 2 P + ⊥
10 5	5551 54 5552 54	200/250 V~ 2 P + ⊥	5	0575 84 0582 84	200/250 V~ 2 P + ⊥
10	5551 58 5552 58	380/415 V~ 3 P + ⊥	5	0575 88 0582 88	380/415 V~ 3 P + ⊥
10	5551 59 5552 59	3 P + N + ⊥	5	0575 89 0582 89	3 P + N + ⊥
		Appliance inlet covers			
				Rubber	
10	0521 25		10	0521 25	For plugs and appliance inlets: 2 P + ⊥ - 16 A
5	0521 26		5	0521 26	3 P + ⊥ - 16 A
5	0521 27		5	0521 27	3 P + N + ⊥ - 16 A / 2 P + ⊥ and 3 P + ⊥ - 32 A
5	0527 99		5	0527 99	3 P + N + ⊥ - 32 A

¹ : Panel mounting sockets (straight outlet) and appliance inlets are P17 Tempra items which are manufactured from plastic

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



KEMPSTON
CONTROLS