


# Meet easy relay mounting

G2RS relay socket

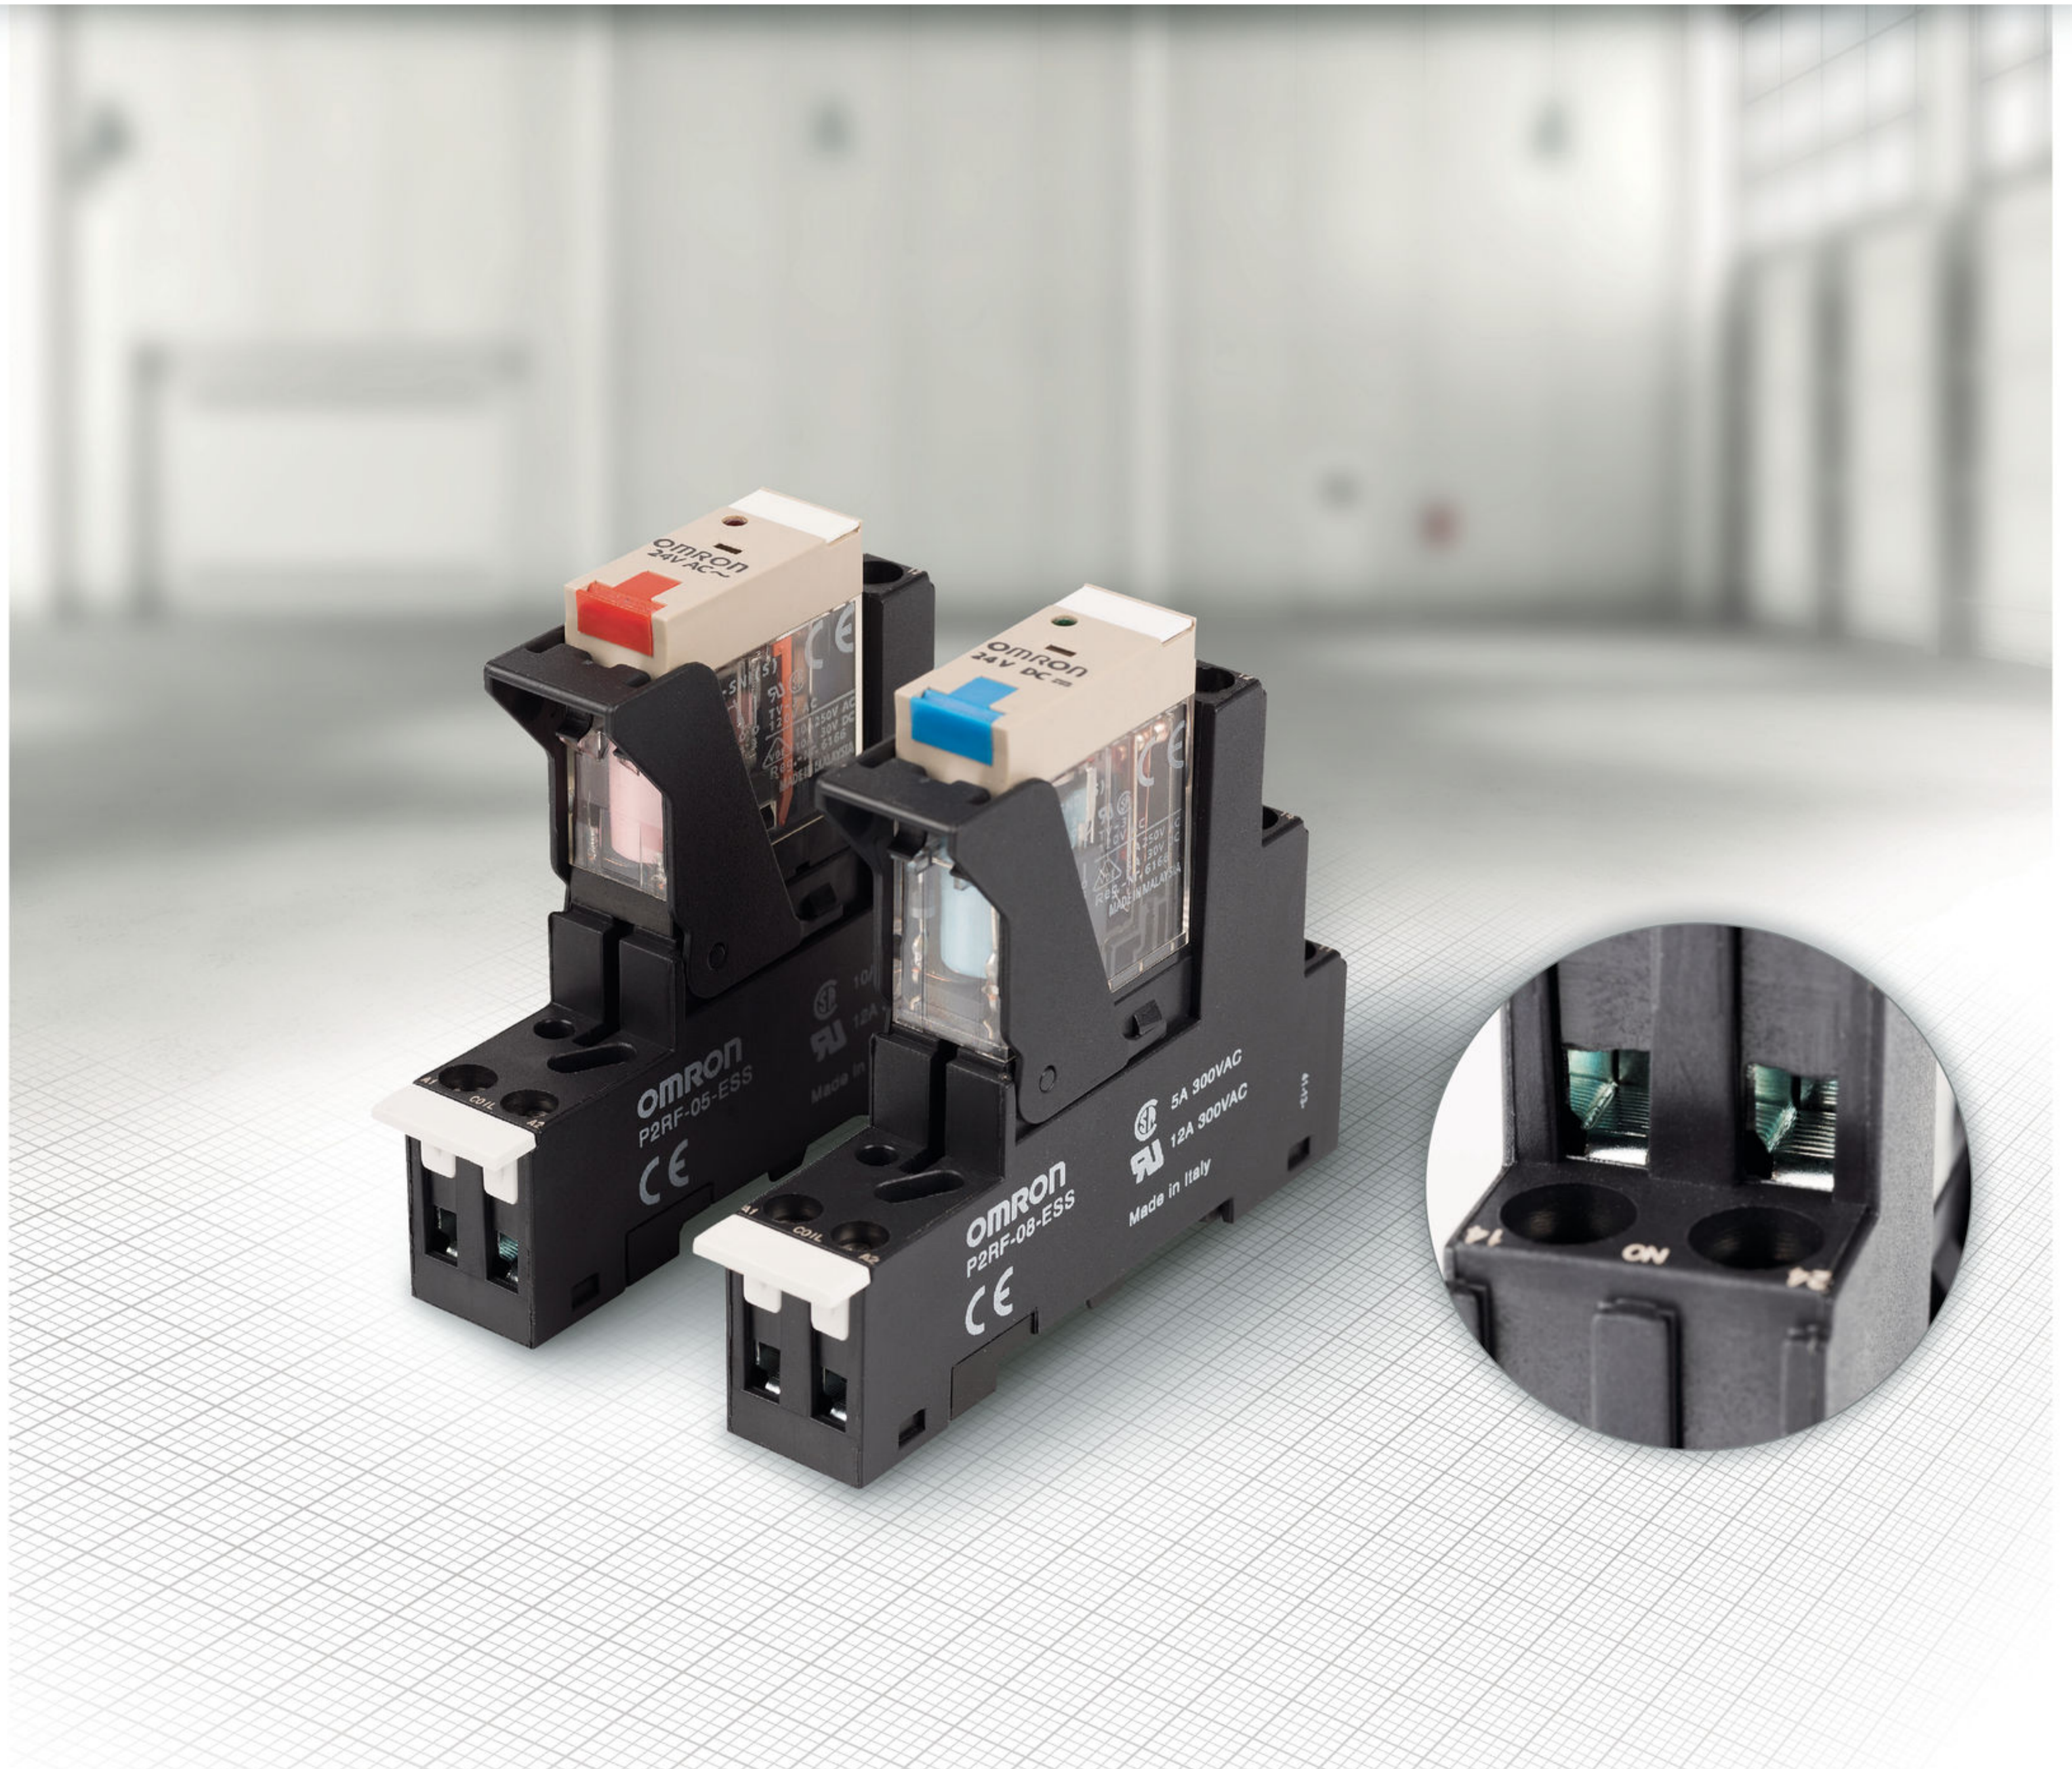

Double wiring available on all terminals  
0.5 to 2.5mm<sup>2</sup> (AWG20 to 14) solid or standard wire  
Ejector enables easy replacement  
Nameplates & socket bridge available  
Finger-protection  
UL/CSA/TUV certification, Lloyds approval expected soon