

**T-COUPLER M12 MALE /2X M12 FEMALE SHIELDED**

T-coupler


Male straight – females straight

M12 – M12, 5-pole


shielded

Distribution function (NO)


Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

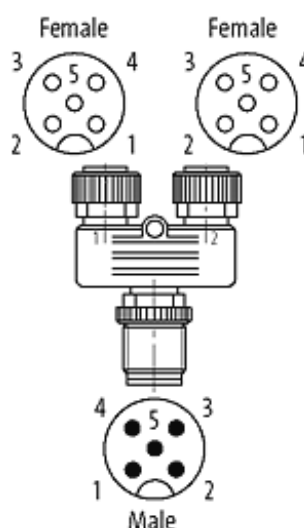[Link to Product](#)**Illustration**

stay connected

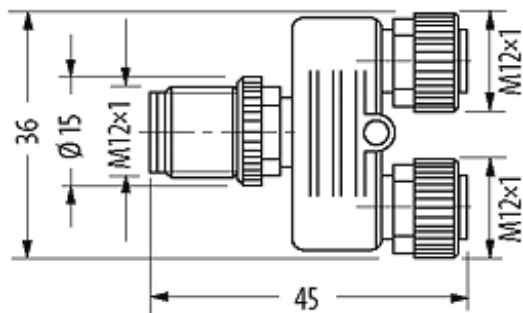

1. Female M12 2. Female

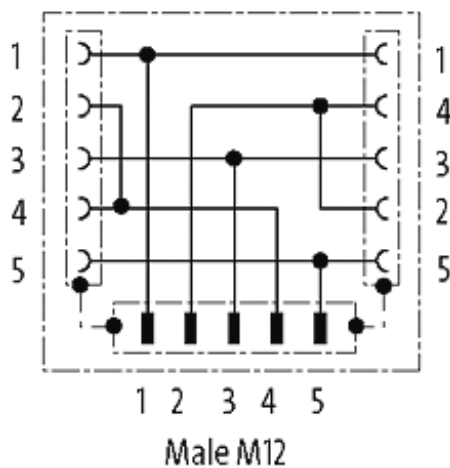

Product may differ from Image

Approvals



\* only for products with UL/CSA approved cable

Form

Form 42181

Technical Data

Operating voltage	max. 60 V AC/DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range -25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85366990

EAN	4048879322782
eClass	27143423
Packaging unit	1