




**KX1 / KX3**




**Mechanical characteristics**

PARAMETER	
Housing	Self-extinguishing plastic UL 94 v0
Mounting	Front panel
Dimensions	48 x 96 x 75.9 mm (W x H x D)
Panel cut-out	45 x 89 (-0... +0.6 mm)
Weight	160 g approx.
Terminals	16 terminals for cables from 2.5 mm <sup>2</sup> (AWG22... AWG14): - on fixed or removable terminal block with screw terminals; - on removable terminal block with spring-load terminals
Protection degree	IP 65 panel mounted with gasket (IP20 for screw terminals) In conformity with En 60070-1 (internal use only)

**Electrical connections**

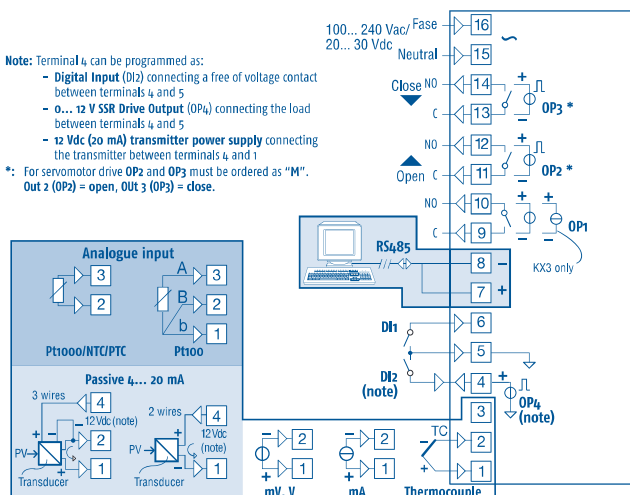

**How to order**

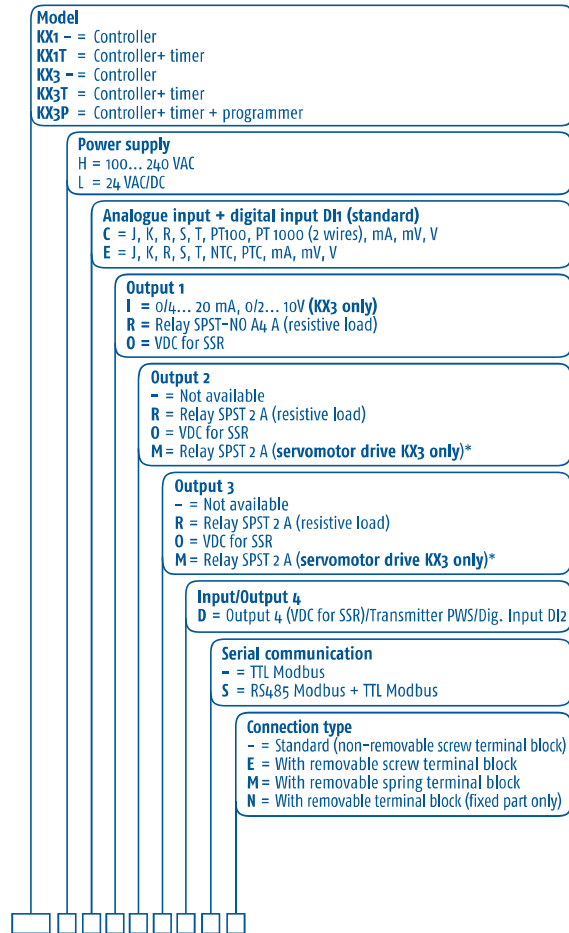

\*: For servomotor drive, both **OUT2** and **OUT3** codes must be selected as "M".

**Dimensions (mm)**

