


# Synergy® white

## socket outlets

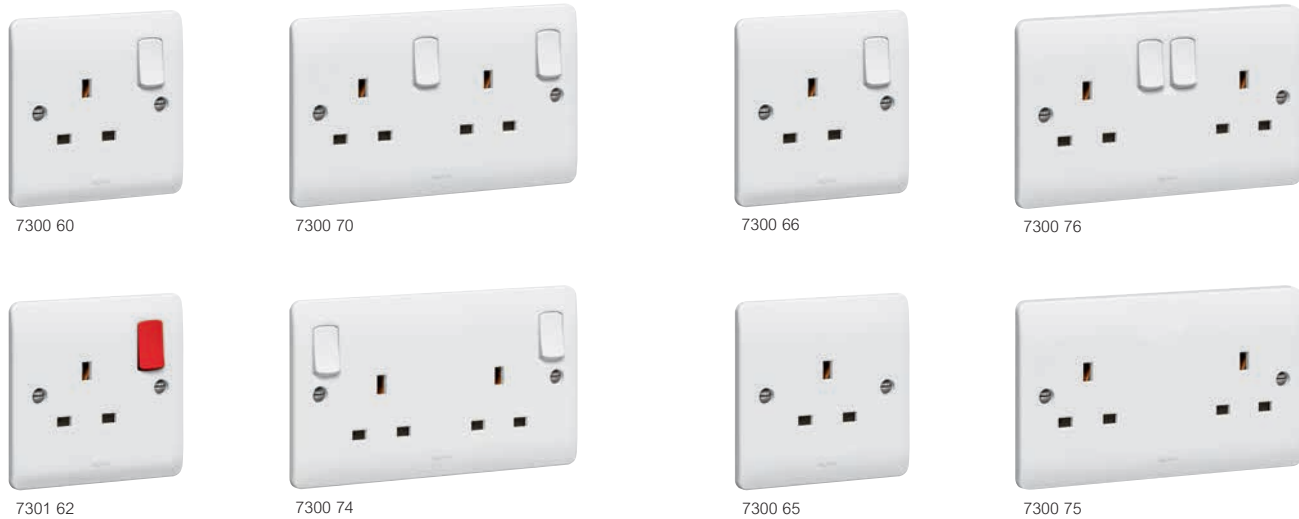


Front plates : white thermoset  
Terminal screws captive and backed off ready for cabling  
Supplied with optional faceplate screw caps

| Pack | Cat. Nos. | Double pole socket outlets 13 A - 250 V~  |
|------|-----------|---|
|      |           | Conform to BS 1363 - Part 2 : 1995<br>Options available as standard with red 'power on' LED indicator<br>Red LED 'power on' upgrade pack also available<br>2 earth terminals<br>Flush mounting back box : min. 25 mm deep<br>Nominal plate dimensions : 1 gang - 86 x 86 mm<br>2 gang - 86 x 146 mm |
| 10   | 7300 60   | 1 gang – switched   |
| 10   | 7301 62   | 1 gang – switched with red rocker   |
| 10   | 7300 61   | 1 gang – switched with red LED power indicator  |
| 10   | 7300 64   | 1 gang – switched for standard and clean earth applications   |
| 10   | 7300 67   | 1 gang – switched non-standard earth pin for standard and clean earth applications  |
| 5    | 7300 70   | 2 gang – switched   |
| 5    | 7301 61   | 2 gang – switched with red rocker   |
| 5    | 7300 71   | 2 gang – switched with red LED power indicator  |
| 5    | 7300 74   | 2 gang – switched outboard for standard and clean earth applications  |
| 5    | 7300 77   | 2 gang – switched non-standard earth pin for standard and clean earth applications  |

| Pack | Cat. Nos. | Single pole socket outlets 13 A - 250 V~  |
|------|-----------|---|
|      |           | Conform to BS 1363 - Part 2 : 1995<br>Options available as standard with red 'power on' LED indicator<br>Red LED 'power on' upgrade pack also available<br>Conventional earth pin release shutter<br>Single earth terminal<br>Flush mounting back box : min. 25 mm deep<br>Nominal plate dimensions : 1 gang - 86 x 86 mm<br>2 gang - 86 x 146 mm |
| 10   | 7300 66   | 1 gang – switched   |
| 5    | 7300 76   | 2 gang – switched   |
|      |           | <b>Unswitched and key switched socket outlets 13 A - 250 V~</b><br>Conform to BS 1363 - Part 2 : 1995<br>Optional red LED 'power on' upgrade pack available (not applicable to key switched sockets)<br>2 earth terminals<br>Flush mounting back box : min. 25 mm deep<br>Nominal plate dimensions : 1 gang - 86 x 86 mm<br>2 gang - 86 x 146 mm  |
| 10   | 7300 65   | 1 gang – unswitched   |
| 5    | 7300 75   | 2 gang – unswitched   |
| 1    | 8200 74   | 2 gang single socket with DP key switch <sup>1</sup>  |

1 : Flush mounting back box : min. 35 mm deep

Green locator LED pack or red power indicator pack p. 38

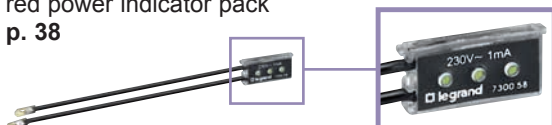

Flush and surface mounting back boxes p. 39



# Synergy® white

## socket outlets (continued)



7300 90



6781 38



7300 89



7300 69



7300 59

Front plates : white thermoset  
Terminal screws captive and backed off ready for cabling  
Supplied with faceplate screw caps

| Pack | Cat. Nos. | Shaver socket  |
|------|-----------|--|
| 1    | 7300 90   | <p>Conforms to BS EN 61558-2-5 : 1998<br/>IP 24</p> <p>For use with European, British, American and Australian 2 pin plugs<br/>Screwless live and neutral terminals<br/>Double wound isolating transformer<br/>Automatic self-resetting overload feature<br/>Plug insertion operates microswitch which energises transformer<br/>Flush mounting back box : min. 47 mm deep<br/>Nominal plate dimensions : 146 x 86 mm</p> <p>Supply : 230 V - 50/60 Hz<br/>Output : 230/120 V - 20 VA max.</p> |

| Pack | Cat. Nos. | Socket outlets 15 A - 250 V~   |
|------|-----------|--|
|      |           | <p>Conform to BS 546 : 1950<br/>Optional red LED 'power on' upgrade pack available<br/>Flush mounting back box : min. 35 mm deep<br/>Nominal plate dimensions : 86 x 86 mm</p> |
| 10   | 7300 88   | 1 gang – unswitched  |
| 10   | 7300 89   | 1 gang – switched  |

| Pack | Cat. Nos. | RCD sockets 13 A - 250 V~   |
|------|-----------|---|
|      |           | <p>Conform to BS 7288 : 1990 and BS 1363 - Part 2 : 1995<br/>Terminal screws captive and backed off ready for cabling<br/>Conventional earth pin release shutter<br/>Maximum operating current 16 A<br/>Incorporate a "test and reset" button<br/>Flush mounting back box : min. 25 mm deep<br/>Nominal plate dimensions :<br/>- 1 gang 86 x 86 mm<br/>- 2 gang 86 x 146 mm</p> |
|      |           | <p><b>ELO - DP 30 mA - active</b><br/>- trips in the event of a power failure<br/>- suitable in applications where automatic restoration of supply would be hazardous, e.g. machinery, power tools</p>  |
| 1    | 6781 33   | RCD unit 1 gang DP 30 mA active   |
| 1    | 6781 37   | RCD unit 2 gang DP 30 mA active   |
|      |           | <p><b>ELR - DP 30 mA - passive</b><br/>- does not trip in the event of a power failure<br/>- suitable in applications where automatic restoration of supply is required, e.g. fridge, freezer, unmanned areas</p>   |
| 1    | 6781 34   | RCD unit 1 gang DP 30 mA passive  |
| 1    | 6781 38   | RCD unit 2 gang DP 30 mA passive  |

| Pack | Cat. Nos. | Socket outlets 5 A - 250 V~  |
|------|-----------|--|
|      |           | <p>Conform to BS 546 : 1950<br/>Optional red LED 'power on' upgrade pack available<br/>2 earth terminals<br/>Flush mounting back box : min. 25 mm deep<br/>Nominal plate dimensions : 86 x 86 mm</p> |
| 10   | 7300 68   | 1 gang – unswitched  |
| 10   | 7300 69   | 1 gang – switched  |

| Pack | Cat. Nos. | Socket outlet 2 A - 250 V~   |
|------|-----------|--|
|      |           | <p>Conforms to BS 546 : 1950<br/>Optional red LED 'power on' upgrade pack available<br/>Conventional earth pin shutter release<br/>Flush mounting back box : min. 25 mm deep<br/>Nominal plate dimensions : 86 x 86 mm</p> |
| 10   | 7300 59   | 1 gang – unswitched  |

**For switched USB socket outlets  
Contact us on +44 (0) 345 605 4333**

**Red power indicator LED pack p.38**

Flush and surface mounting  
back boxes p. 39



Download the full file at

<http://assets.kempstoncontrols.com/doc/Synergy%20Wiring%20Accessories.pdf>



**KEMPSTON**  
CONTROLS