

Synergy® traditional

socket outlets (continued) and fused connection units




7330 68



7330 35



7332 30

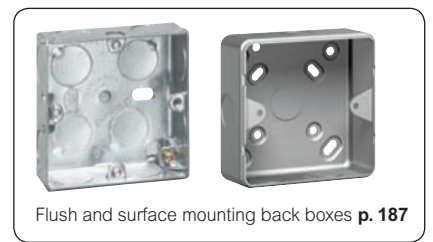

Flush and surface mounting back boxes **p. 187**



7330 69



7330 90



7330 37



7332 32



Brushed stainless steel front plates : brushed stainless steel with clear epoxy satin lacquer coating
 Polished stainless steel front plates : electroplated stainless steel plate with trivalent chrome for mirror finish
 White interiors and rockers
 Terminal screws captive and backed off ready for cabling

Pack	Cat. Nos.		Socket outlets 5 A - 250 V~
	Stainless steel Brushed Polished		Conform to BS 546 : 1950 Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm
1	7330 68	7332 68	1 gang – unswitched
1	7330 69	7332 69	1 gang – switched

Pack	Cat. Nos.		Shaver sockets
	Stainless steel Brushed Polished		Conform to BS EN 61558-2-5 : 1998 IP 24 For use with European, British, American and Australian 2 pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates microswitch which energises transformer Flush mounting back box : min. 47 mm deep Nominal plate dimensions : 146 x 86 mm
1	7330 90	7332 90	Supply : 230 V - 50/60 Hz Output : 230/120 V - 20 VA max.

Pack	Cat. Nos.		Fused connection units 13 A - 250 V~
	Stainless steel Brushed Polished		Conform to BS 1363 - Part 4 : 1995 Fuse drawer retained by quarter turn catch, drawer padlockable in open position for safety Flush mounting back box : min. 25 mm deep Nominal plate dimensions : 86 x 86 mm
			Switched
1	7330 34	7332 34	Switched, DP
1	7330 35	7332 35	Switched, DP with red LED power indicator
1	7330 36	7332 36	Switched, DP with cord outlet
1	7330 37	7332 37	Switched, DP with cord outlet + red LED power indicator
			Unswitched
1	7330 30	7332 30	Unswitched
1	7330 31	7332 31	Unswitched with red LED power indicator
1	7330 32	7332 32	Unswitched with cord outlet
1	7330 33	7332 33	Unswitched with cord outlet + red LED power indicator

Synergy® traditional control switches



7330 14




7332 10



7330 22



7332 22

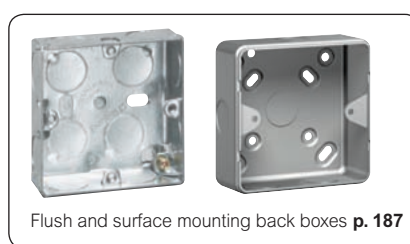Flush and surface mounting back boxes **p. 187**

7330 12



7332 16



7330 23



7332 29



Red LED power indicator

Brushed stainless steel front plates : brushed stainless steel with clear epoxy satin lacquer coating
 Polished stainless steel front plates : electroplated stainless steel plate with trivalent chrome for mirror finish
 White interiors and rockers (red rockers for specific items)
 Terminal screws captive and backed off ready for cabling

Pack	Cat. Nos.		Double pole switches 20 A - 250 V \sim	
	Stainless steel		Conform to BS EN 60669-1 : 2000	
	Brushed	Polished	Flush mounting back box : min. 25 mm deep	
			Nominal plate dimensions : 86 x 86 mm	
1	7330 10	7332 10		20 A DP
1	7330 14	7332 14		20 A DP with cord outlet
1	7330 16	7332 16		20 A DP with cord outlet + red LED power indicator
1	7330 12	7332 12		20 A DP with red LED power indicator

Pack	Cat. Nos.		Cable outlets 20 A - 250 V \sim	
	Stainless steel		Conform to BS 5733 : 1995	
	Brushed	Polished	Flush mounting back box : min. 25 mm deep	
			Nominal plate dimensions : 86 x 86 mm	
1	7330 19	7332 19		20 A - with terminal block and outlet gland

Pack	Cat. Nos.		Double pole switches 45 A - 250 V \sim	
	Stainless steel		Conform to BS EN 60669-1 : 2000	
	Brushed	Polished	Red rocker	
			Flush mounting back box : min. 48 mm deep	
			Nominal plate dimensions :	
			2 gang - 146 x 86 mm	
			1 gang - 86 x 86 mm	
1	7330 20	7332 20		45 A DP
1	7330 21	7332 21		45 A DP with red LED power indicator
1	7330 22	7332 22		45 A DP
1	7330 23	7332 23		45 A DP with red LED power indicator

Pack	Cat. Nos.		Cooker control units 45 A - 250 V \sim	
	Stainless steel		Conform to BS 4177 : 1992	
	Brushed	Polished	45 A - 250 V \sim DP switch with 13 A - 250 V \sim DP switched socket outlet	
			Red rocker	
			Flush mounting back box : min. 48 mm deep	
			Nominal plate dimensions : 86 x 146 mm	
1	7330 28	7332 28		DP with DP switched socket
1	7330 29	7332 29		DP with DP switched socket + red LED power indicators

Pack	Cat. Nos.		Cable outlets 45 A - 250 V \sim	
	Stainless steel		Conform to BS 5733 : 1995	
	Brushed	Polished	2 piece design for safety	
			Flush mounting back box : min. 48 mm deep	
			Nominal plate dimensions : 86 x 86 mm	
1	7330 26	7332 26		45 A - with terminal block

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Wiring%20Devices%202012.pdf>



KEMPSTON
CONTROLS