

TENBY®

Fast & reliable wiring connections



Tenby Rapid Clamp Ultra creates earthing connections with a simple fixing method that makes fitting them in hard to reach areas easier than ever, in new and existing installations.

The unique 'twist' fixing method is up to 5 times faster when compared with traditional clamps. So for mains incomer pipes, boiler replacement, special locations or supplementary bonding in pre-17th Edition installations, earthing is a whole lot easier with Tenby!

EASY TO FIT

- 1 Simply 'twist' the clamp to attach it to the pipe
- 2 The clamp is locked into position in under a second
- 3 Screw down the clamp to secure the fitting in 6 seconds
- 4 Finally attach the earthing wire to complete the installation in 10 seconds

Tenby® Rapid Clamp Ultra

earth clamps



0343 85



0343 86



0343 87

Conform to BS 951 : 2009

Available in three sizes

Suitable for dry, non corrosive atmospheres and corrosive or humid conditions

Resistance of incandescent wire 960 °C

Resistivity of 0.4 mΩ

Colour : grey

Polyamide

Safe, intuitive 1/4 turn mounting ensuring an excellent, lasting equipotential link

Pack	Cat. Nos.	Earth clamps for all conditions			
		Terminal size : A – D (2.5 – 10 mm ²) Maximum earth conductor 1 x 10 mm ²			
		Pipe Ø		Connection cross-section	
		Ø min. (mm)	Ø max. (mm)	min. (mm ²)	max. (mm ²)
20	0343 85	12	16	2.5	16
10	0343 86	18	22	2.5	16
10	0343 87	28	32	2.5	16

Tenby® Rapid Clamp

earth clamps



EC14



EC15/2



EC16/3

Conform to BS 951 : 2009

Available in three types :

Red (EC14) for dry, non corrosive atmospheres

Blue (EC15) for corrosive or humid conditions

Green (EC16) for corrosive or humid conditions, large earth conductors


5 standard band lengths to suit pipe Ø of 12-32 mm, 32-50 mm, 50-75 mm, up to 100 mm and up to 150 mm

Pack	Cat. Nos.	Earth clamps for dry conditions	
		Terminal size : A – D (2.5 – 10 mm ²) Maximum earth conductor 1 x 10 mm ²	
20	EC14	For pipe Ø 12 – 32 mm	
20	EC14/2	For pipe Ø 32 – 50 mm	
20	EC14/3	For pipe Ø 50 – 75 mm	

Pack	Cat. Nos.	Earth clamps for all conditions	
		Terminal size : A – D (2.5 – 10 mm ²) Maximum earth conductor 1 x 10 mm ²	
20	EC15	For pipe Ø 12 – 32 mm	
20	EC15/2	For pipe Ø 32 – 50 mm	
20	EC15/3	For pipe Ø 50 – 75 mm	
20	EC15/4	For pipe Ø up to 100 mm	
20	EC15/6	For pipe Ø up to 150 mm	
		Terminal size : A – E (2.5 – 16 mm ²) Maximum earth conductor 2 x 16 mm ²	
20	EC16	For pipe Ø 12 – 32 mm	
20	EC16/2	For pipe Ø 32 – 50 mm	
20	EC16/3	For pipe Ø 50 – 75 mm	

Download the full file at

<http://assets.kempstoncontrols.com/doc/Wiring%20Accessories%20Product%20Guide.pdf>

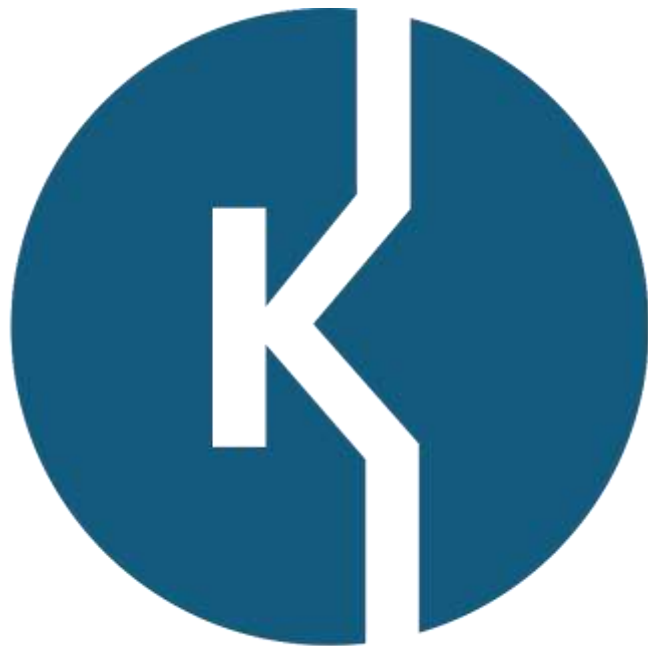

KEMPSTON
CONTROLS