

- DC wide range input
- Short circuit, overload, input and output overvoltage protections
- Over temperature protection
- Compact dimension





**NOTE**

Please refer to the datasheet for more details

Above overcurrent limit, the protection starts cycling in ON/OFF mode(hiccup autoreset), the maximum current supplied depends by the line resistance

Inrush current measured at Un with battery power supply; peak current varies according to the internal impedance of the current source and the resistance of the connections.

The capacitors between phase and neutral, requires that the isolation tests are carried out in DC

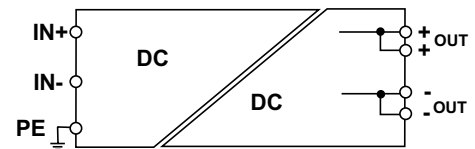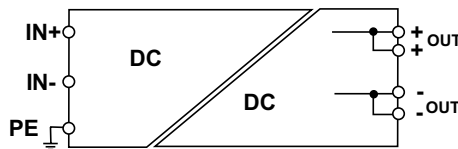

CODE	XCSA120CC	XCSA120DC
<b>TYPE</b>	<b>CSA120CC</b>	<b>CSA120DC</b>
<b>INPUT TECHNICAL DATA</b>		
Input rated voltage	24 Vdc	48 Vdc
Input voltage AC	—	—
Input voltage DC	18...36 Vdc	36...72 Vdc
Frequency	—	—
Current consumption	5.8 A (24 Vdc) ±10%	2.8 A (48 Vdc) ±10%
Inrush peak current	90 A	120 A
Power factor	—	—
Internal protection fuse	T 10 A	T 5 A
External protection on AC line	MCB: C-13 A / Fuse: T-13 A	MCB: C-6 A / Fuse: T-6 A
<b>OUTPUT TECHNICAL DATA</b>		
Output rated voltage	24 Vdc	24 Vdc
Output adjustable range	22.5...27.5 Vdc	22.5...27.5 Vdc
Continuous current	5 A (24 Vdc)	5A (24 Vdc)
Overload limiting	6.5 A	6.5 A
Short circuit peak current	12 A for 300 ms	13 A for 300 ms
Ripple @ nominal ratings	150 mVpp	200 mVpp
Hold up time	2 ms	4.5 ms
Status indication	LED "DC OK"	LED "DC OK"
Alarm contact	—	—
Parallel connection	possible	possible
Redundant parallel connection	possible with external ORing diode	possible with external ORing diode
<b>GENERAL TECHNICAL DATA</b>		
Efficiency	87% (24 Vdc)	90% (48 Vdc)
Dissipated power	18 W (24 Vdc)	13 W (48 Vdc)
Operating temperature range	-20...+50°C	-20...+50°C
Input / output isolation	2.1 kVdc / 60s	2.1 kVdc / 60s
Input / ground isolation	1.41 kVdc / 60s	1.41 kVdc / 60s
Output / ground isolation	0.75 kVdc / 60s	0.75 kVdc / 60s
Standard / approvals	EN 60950-1	EN 60950-1
EMC Standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4
Overvoltage category / Pollution degree	II / 2	II / 2
Protection degree	IP 20	IP 20
Connection terminal IN/OUT	2.5 mm <sup>2</sup> / 2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup> / 2.5 mm <sup>2</sup>
Housing material	aluminium	aluminium
Dimension	40x130x115 mm	40x130x115 mm
Approximate weight	550 g	550 g
Mounting information	vertical on a rail, 10 mm from adjacent components	vertical on a rail, 10 mm from adjacent components
<b>APPROVALS</b>	<b>CE</b>	<b>CE</b>
<b>ACCESSORIES</b>		
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
Mounting rail (IEC60715/TH35-15)	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB
Marking tag	—	—