


Atlantic-E weatherproof metal cabinets

IP 66 - IK 10

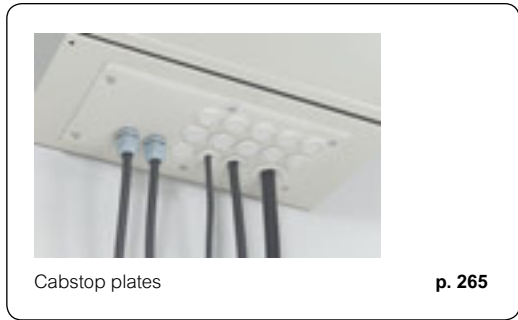

Cabstop plates

p. 265

Cabinet and equipment selection chart **p. 262-263**
 Technical characteristics **p. 269**

Pack	Cat.Nos	Metal cabinets RAL 7035			
		IP 66 - IK 10 according to IEC EN 60529 Supplied with: galvanized plain mounting plate (removable), earth connection braid and wall mounting lugs Reversible door Supplied with one double bar lock up to 500 x 500 x 250 mm and 2 double bar lock from 600 x 400 x 150 mm Removable cable entries plate Can be equipped with Cabstop plates (p. 265) Can be equipped with Lina 12.5 and Lina 25 perforated plates, sectionned uprights, DIN rail or chassis with insulating faceplates (p. 276, 278, 279) RAL 7035 80 µ thick textured polyester coating			
		Dimensions (mm)			
		Height	Width	Depth	Weight (kg)
1	0 399 30	300	200	150	4.5
1	0 399 31	300	300	150	4.7
1	0 399 32	300	300	200	4.8
1	0 399 33	300	400	200	6.7
1	0 399 34	400	300	150	6.25
1	0 399 35	400	300	200	6.7
1	0 399 36	400	400	200	10.5
1	0 399 37	400	600	250	13.5
1	0 399 38	500	400	150	11
1	0 399 39	500	400	200	11.5
1	0 399 40	500	400	250	12
1	0 399 41	500	500	250	12.5
1	0 399 42	600	400	200	13
1	0 399 43	600	400	250	13.5
1	0 399 44	600	500	200	16
1	0 399 45	600	500	250	16.5
1	0 399 46	600	600	250	17
1	0 399 51	700	500	200	20
1	0 399 52	700	500	250	21
1	0 399 54	800	600	200	27
1	0 399 55	800	600	250	30
1	0 399 56	800	600	300	31.7
1	0 399 59	800	800	300	33.5
1	0 399 63	1000	600	300	48
1	0 399 64	1000	800	250	49.5
1	0 399 65	1000	800	300	52
1	0 399 69	1200	800	300	62

Pack	Cat.Nos	Plinths RAL 7021		
		Height 200 mm Front and rear trap door For cabinets		
		Dimensions (mm)		
		Width (mm)	Depth (mm)	Weight (kg)
1	0 363 00	600	300	6
1	0 363 01	800	300	6.7

Pack	Cat.Nos	Roofs RAL 7035		
		Steel Possible adjustment ± 20 mm (front or back) For cabinets		
		Width (mm)	Depth (mm)	Weight (kg)
1	0 365 51	300	200	1.2
1	0 365 52	400	200	1.4
1	0 365 53	400	250	1.8
1	0 365 64	500	250	2
1	0 365 54	600	250	2.5
1	0 365 56	600	300	3
1	0 365 57	800	300	3.6

Pack	Cat.Nos	Wall mounting lugs (set of 4)
1	0 364 01	For load up to 300 kg Horizontal or vertical installation With a roof, horizontal installation only Zamak RAL 7035 Supplied with cover finish

Pack	Cat.Nos	Lighting kit
1	0 363 12	Supplied with 8 W fluorescent tube, Ø16 mm 230 V - 50 Hz Class I - IP 20 - 600 lumens Electromagnetic compatibility according to EN 55015 Equipped with a switch Connection on terminal block Dim.: 320 x 61 x 32 mm

Pack	Cat.Nos	Metal rebate locks
10	0 399 80	Square female 6 mm
10	0 399 81	Triangle male 8 mm

Pack	Cat.Nos	Key barrels
		Supplied with set of 2 keys For key No
10	0 399 86	405
10	0 399 87	455
10	0 399 88	2433 A
10	0 365 45	Set of two 2433 A keys

Pack	Cat.Nos	Metal keys for rebate locks
10	0 365 35	Square female 6 mm
10	0 365 40	Triangle male 8 mm