

20...250 V AC

Thyristor output  
2-wire version

Series 90

Art. No.	Type	Sensing dist. [mm]			Flush mounting	Thread Ø [mm]	Material	Dim.
		Sn	Min.	Max.				
Cylindrical housing								
901100	KAS-90-20-S	6	2	8	yes	22	PA	1-7
901200	KAS-90-20-Ö							
901300	KAS-90-21-S	8	2	10	no	22	PA	1-7
901400	KAS-90-21-Ö							
901500	KAS-90-30-S	15	2	20	yes	30	PA	1-8
901600	KAS-90-30-Ö							
902100	KAS-90-32-S	20	3	25	no	30	PA	1-8
902200	KAS-90-32-Ö							
902110	KAS-90-32-S-PTFE	20	3	25	no	30	PTFE	1-8
902210	KAS-90-32-Ö-PTFE							
903600	KAS-90-37-S	15	2	25	yes	34	PA	1-9
903700	KAS-90-37-Ö							
904000	KAS-90-38-S	20	3	30	no	34	PA	1-9
904100	KAS-90-38-Ö							
904400	KAS-90-40-S	20	3	25	yes	40	PA	1-10
904500	KAS-90-40-Ö							
904600	KAS-90-41-S	25	3	35	no	40	PA	1-10
904700	KAS-90-41-Ö							
904800	KAS-90-50-S	25	3	35	yes	50	PA	1-11
904900	KAS-90-50-Ö							
905000	KAS-90-52-S	30	3	40	no	50	PA	1-11
905100	KAS-90-52-Ö							
905200	KAS-90-61-S	35	3	50	no	64	PA	1-12
905300	KAS-90-61-Ö							


For suitable mounting clamps please refer to our catalogue of accessories.

20...250 V AC

Thyristor output  
2-wire version


Series 90

Art. No.	Type	Sensing dist. [mm]			Flush mounting	Thread Ø [mm]	Material	Dim.
		Sn	Min.	Max.				
Cylindrical housing with thread with plastic flange connector M12 x 1 and LED display								
902580	KAS-90-32-S-M32-Y1	20	3	25	no	M32 x 1.5	PA	7-1
902600	KAS-90-32-Ö-M32-Y1							
Cylindrical housing with thread with metal flange connector M12 x 1 and LED display								
903213	KAS-90-34-S-1"-PTFE/Ms-Y9	20	3	25	no	1"	PTFE/brass	7-2
903313	KAS-90-34-Ö-1"-PTFE/Ms-Y9							

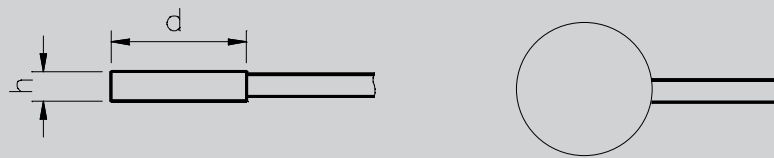


Dim. 12

Dimension No.	Diameter d [mm]	Height h [mm]	M3 thread centred on back side	
			PTFE/brass housing	PTFE housing
12-1	18	5	yes	no
12-2	22	10	yes	no
12-3	30	15	yes	no

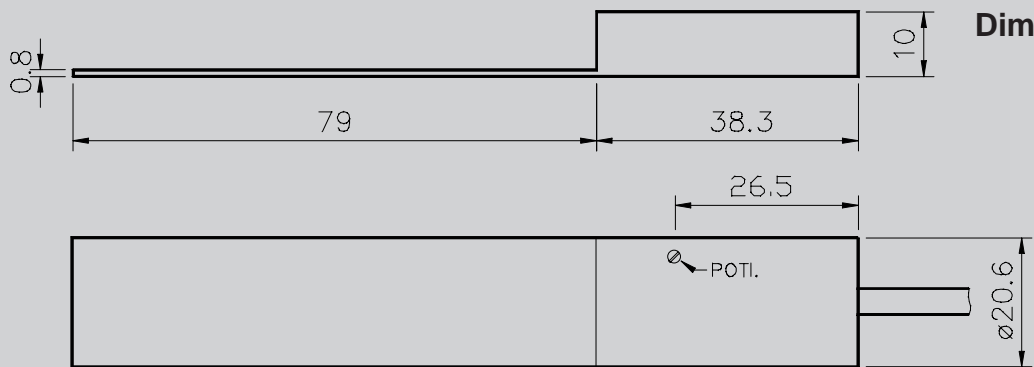

Dim. 13

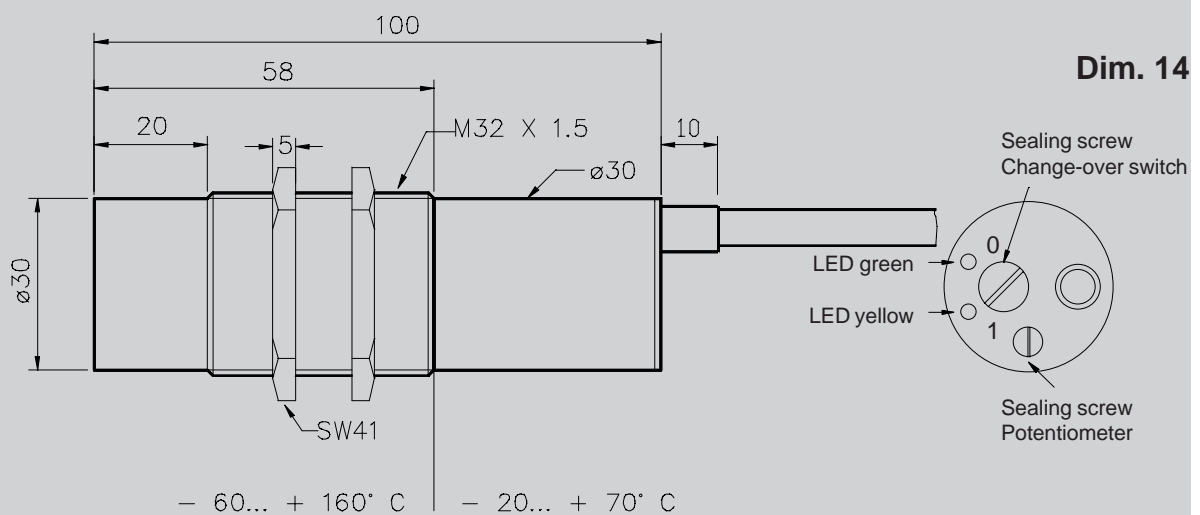

Dim. 14