
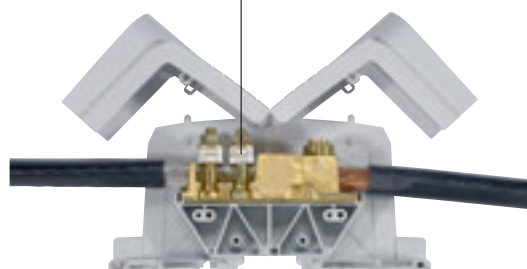


# Viking™ 3 power terminal blocks

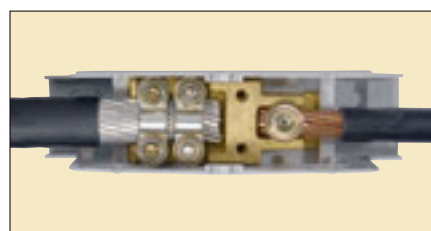

0 390 11 (interior view with covers cut away)

Al/Cu direct connection without cable lug

Built-in insulation dividers



Possibility of sealing



CAB 3 and Duplex marking

Built-in removable adjustable covers



0 390 72



0 390 31






Approvals p. 906

Bridging the gap between the enclosure and external cables

Pack	Cat.Nos	<b>Aluminium/copper power terminal blocks with connectors</b>		
		For aluminium/copper cables, copper bars or cable lugs (see selection chart p. 311) Direct connection of cable Insulation and protection against direct contact without additional accessories (built-in dividers and covers) Pre-cut removable covers for adjustment to the various connection modes Fixed using metal clip for rails 15 mm depth and EN 60715 15 mm depth, or on plate with screws Permits the use of Cab 3, Duplex markers Test via test plug closed covers Blocks with identical pitch can be joined using a threaded rod Shunting possible with Cat.Nos 0 394 46/47		
5	0 390 10	<b>Cable - cable</b> Rigid or flexible cable (mm²)	Rigid or flexible cable (mm²)	Pitch (mm)
5	0 390 11	Al/Cu 35 to 120	Cu 35 to 70	42
		Al/Cu 70 to 300	Cu 70 to 150	55
5	0 390 13	<b>Cable lug - cable lug</b> Max. connection (mm²)	Max. connection (mm²)	Pitch (mm)
5	0 390 14	Al/Cu 95	Al/Cu 95	36
5	0 390 15	Al/Cu 150	Al/Cu 150	42
		Al/Cu 300	Al/Cu 300	55
5	0 390 17	<b>Cable lug - cable</b> Max. connection (mm²)	Rigid or flexible cable (mm²)	Pitch (mm)
5	0 390 18	Al/Cu 150	Cu 35 to 95	42
		Al/Cu 300	Cu 70 to 150	55
5	0 390 20	<b>Cable - cable lug</b> Rigid or flexible cable (mm²)	Max. connection (mm²)	Pitch (mm)
5	0 390 21	Al/Cu 35 to 120	Al/Cu 120	42
		Al/Cu 70 to 300	Al/Cu 300	55

Pack	Cat.Nos	<b>Equipotential bonding shunts</b>
5	0 394 46	For aluminium/copper terminal blocks with connectors Supplied with screws
5	0 394 47	For blocks with pitch 36 and 42 mm For blocks with pitch 55 mm

Pack	Cat.Nos	Power terminal blocks without connectors	
		For copper bars or cable lugs Insulation dividers and protective covers to be ordered separately For use with terminal marker sheets (p. 304)	
		<b>Cable lug - cable lug for symmetrical rails</b> Fixed using metal clip on rails  15 mm depth and  EN 60715 15 mm depth	
		Connecting max. (mm <sup>2</sup> )	Pitch (mm)
5	0 390 71	35	26
5	0 390 72	70	34
5	0 390 73	120	34
5	0 390 74	240	46
		<b>Cable lug - cable lug for asymmetrical rails</b> Fixed using metal clip on rails  EN 60715	
5	390 31	35	26
5	390 32	70	34
5	390 33	120	34
5	390 34	240	46

Pack	Cat.Nos	<b>Insulation and protection accessories</b>
		For terminal blocks without connectors
		<b>Separation barriers</b> Take protective covers Marking possible with CAB 3 (p. 314)
10	0 394 77	For blocks with pitch 26 mm
10	0 394 78	For blocks with pitch 34 and 46 mm
		<b>Protective covers</b> For mounting on separation barriers
5	0 394 86	For 3 blocks with pitch 46 mm or for 4 blocks with pitch 34 mm
5	0 394 88	For 4 blocks with pitch 26 mm
5	0 394 89	For 4 blocks with pitch 46 mm



**End stops** (p. 304)

**Al/Cu distribution boxes** (p. 193)

**CAB 3 marking system** (p. 314)