


# Viking 3 terminal blocks – spring connection

for copper cable (continued)

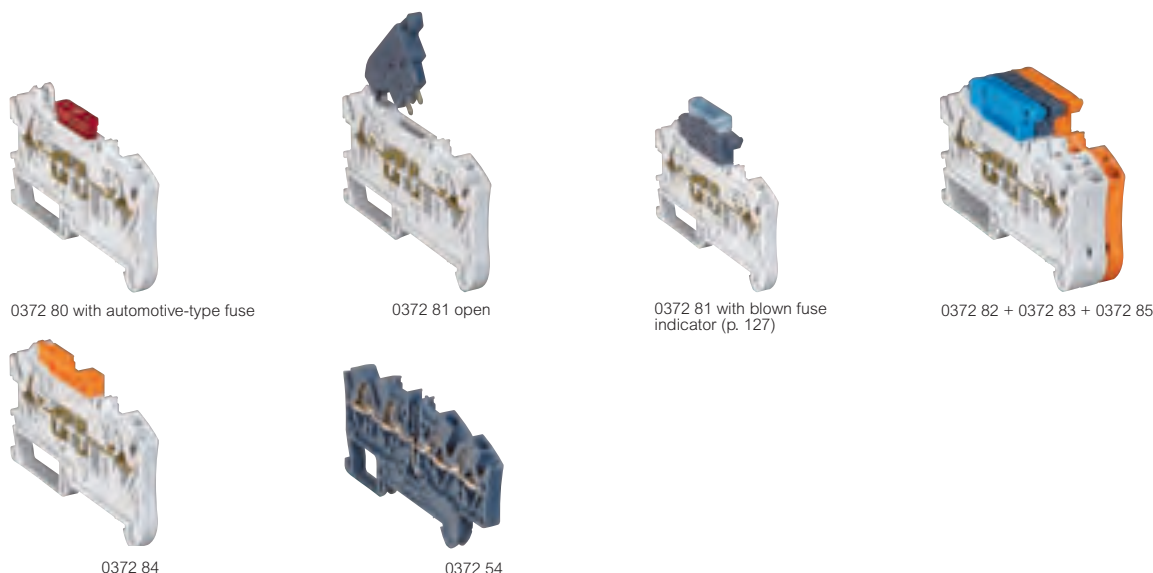

Accessories **p. 126-127**  
 Technical characteristics **p. 130-131**

Screwless connection system, stainless steel spring type  
 Compatible with either 2 rigid copper cables or flexible cables (0.5 mm<sup>2</sup> - 16 mm<sup>2</sup>) with or without ferrules (p. 148)  
 Direct tool-free insertion of a rigid cable. Direct tool-free insertion of a flexible cable with ferrule, up to 6 mm width  
 Facility for 2 bridging combs  
 Compatible with rails EN 60715 depth 7.5 mm and 15 mm

Pack	Cat. Nos.	Disconnection					
		<b>1 connection - 2 cables</b>					
		Disconnection by means of blade type lever, handle lever or mini lever (with tool)					
		<b>Open (to be equipped)</b>					
		Can take a blade-type automotive fuse or a miniature circuit breaker					
		Colour	Nominal cross section (mm <sup>2</sup> )	Rigid cable (mm <sup>2</sup> )	Capacity Flexible cable (mm <sup>2</sup> )	Flexible cable with ferrule (mm <sup>2</sup> )	Width (mm)
20	0372 80	Grey ●	2.5	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5	6
		<b>For fuse cartridge 5 x 20 with handle lever</b>					
20	0372 81	Grey ●	2.5	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5	6
		<b>For neutral circuit with blue handle lever</b>					
20	0372 82	Grey/blue ●	2.5	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5	6
		<b>For standard circuit with handle lever</b>					
20	0372 83	Grey ●	2.5	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5	6
		<b>For standard circuit with mini lever</b>					
20	0372 84	Grey ●	2.5	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5	6
		<b>For circuit not broken with handle lever</b>					
20	0372 85	Orange ●	2.5	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5	6
		<b>For circuit not broken with mini lever</b>					
20	0372 86	Orange ●	2.5	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5	6

**Blown fuse indicators** p. 127

Pack	Cat. Nos.	Function blocks					
		<b>1 connection - 4 cables - 2 entries/2 outlets - diode-carrier</b>					
		Colour	Nominal cross section (mm <sup>2</sup> )	Rigid cable (mm <sup>2</sup> )	Capacity Flexible cable (mm <sup>2</sup> )	Flexible cable with ferrule (mm <sup>2</sup> )	Width (mm)
60	0372 54	Grey ●	4	0.5 to 6	0.5 to 4	0.5 to 2.5	5
		<b>2 connections - 4 cables - 2 levels - diode carrier</b>					
60	0372 55	Grey ●	4	0.5 to 6	0.5 to 4	0.5 to 2.5	5
		<b>2 connections - 4 cables - 2 levels - with LED</b>					
		Voltage presence indicator (12/24V= /~)					
60	0372 56	Grey ●	4	0.5 to 6	0.5 to 4	0.5 to 2.5	5


**Accessories** p. 126-127

**End stops** p. 126

CAB 3 marking system **p. 140-142**  
 Starfix ferrules and crimping tools **p. 148-149**



# Viking 3 accessories for terminal blocks

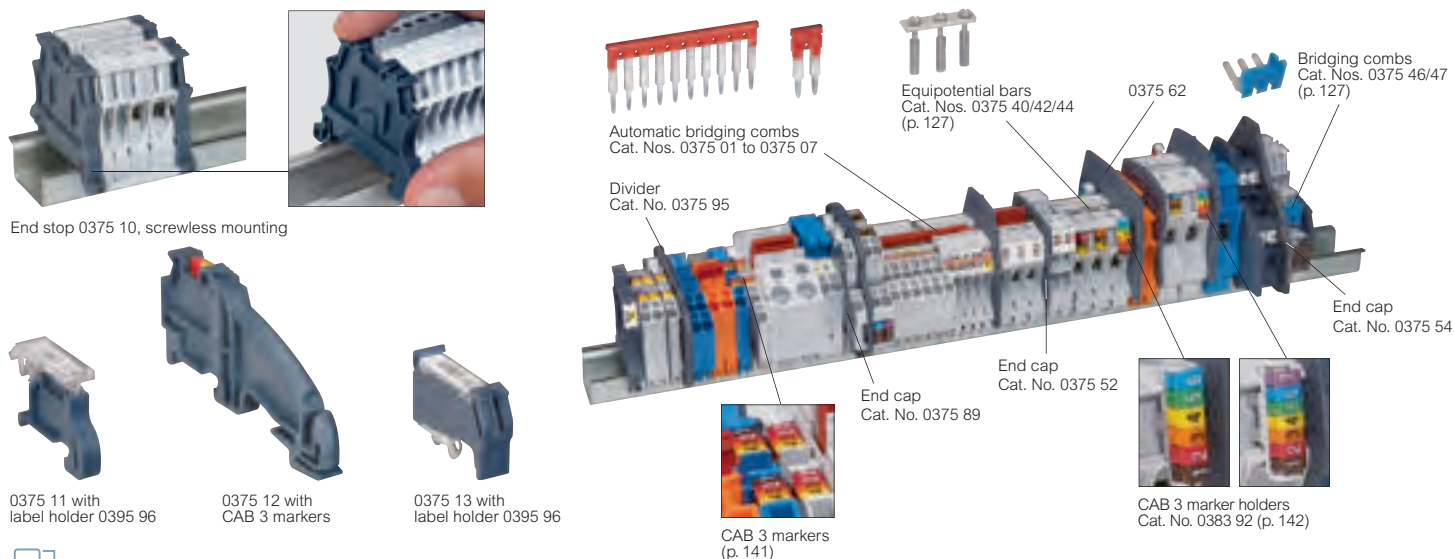

## Technical characteristics p. 131

Pack	Cat. Nos.	Rails
10	0374 04	Length 2 m ┌ EN 60715 depth 7.5 mm
10	0374 07	┌ depth 15 mm
10	0394 49	<b>45° mounting bracket</b> Set of 2 supports for tilting a rail at an angle of 45° Supplied with 4 x M6 screws, nuts and washers
50	0375 10	<b>End stops</b> Grey Compatible with CAB 3 marking system <b>6 mm width</b> Screwless mounting For rails ┌ depth 15 mm and ┌ EN 60715 depth 7.5 mm and 15 mm Accepts label holder Cat. No. 0395 96 Acts as end cap for screw terminal blocks 1 entry/1 exit 5, 6, 8 and 10 mm width
20	0375 11	<b>8 mm width</b> For rails ┌ depth 15 mm and ┌ EN 60715 depth 7.5 mm and 15 mm Accepts label holder Cat. No. 0395 96
10	0375 12	<b>10 mm width</b> For rails ┌ depth 15 mm and ┌ EN 60715 depth 7.5 mm (except for rail fixed on plate) and 15 mm - IP 2X terminal block with flat steel bar 12 x 2 mm Cat. No. 0048 19 (p. 42) - Copper bar 12 x 4 mm Cat. No. 0373 89 (p. 45) - Shielding bar 10 x 3 mm Cat. No. 0375 34 (p. 127)
20	0375 13	<b>12 mm width</b> For rails ┌ EN 60715, ┌ depth 15 mm and ┌ EN 60715 depth 7.5 mm and 15 mm
20	0395 96	<b>Identification accessories</b> <b>Transparent label holder</b> With variable angle Fixing on end stops Cat. Nos. 0375 10/11 Supplied with label 32 x 9.5 mm Compatible with label Cat. No. 0395 97
20	0395 97	<b>Label</b> For engraving 28 x 9.5 mm For label holder Cat. No. 0395 96. Flexible ABS White background, black engraving
10	0395 98	<b>Black felt tip pen</b> For permanent marking

### CAB 3® marking system p. 140-142

Pack	Cat. Nos.	End caps
		Grey
		<b>For screw terminal blocks</b>
100	0375 50	1 entry/1 exit 5, 6, 8 and 10 mm width
20	0375 51	1 entry/1 exit 12 and 15 mm width
20	0375 52	2 entries/2 exits
20	0375 53	2 levels
20	0375 54	3 levels
20	0375 55	Disconnection terminal 6 mm width and function blocks 5 mm width
20	0375 56	Disconnection terminal fuse cartridge 5 x 20 with screwed plug
10	0375 57	Disconnection for measurement
		<b>For spring terminal blocks with 5 mm width</b> 5 mm pitch block becomes 6 mm pitch with end cap fitted Permits termination of a 4 mm <sup>2</sup> cable complete with ferrule
50	0375 86	1 entry/1 exit
50	0375 87	1 entry/2 exits
20	0375 88	2 entries/2 exits
20	0375 89	2 levels
		<b>For spring terminal blocks with 6 mm width</b> Disconnection type
20	0375 90	
		<b>Separation and insulation dividers</b> Grey
		<b>For screw terminal blocks</b>
20	0375 60	1 entry/1 exit 5, 6, 8 and 10 mm width
10	0375 61	1 entry/1 exit 12 and 15 mm width
10	0375 62	2 entry/2 exits and disconnection 6 mm width blocks
10	0375 63	2 levels
		<b>For spring terminal blocks</b>
10	0375 95	1 entry/1 exit, 1 entry/2 exits and 2 entry/2 exits 5 and 6 mm width
10	0375 96	2 levels
		<b>Bridging accessories</b> <b>Bridging combs for screw and spring terminal blocks</b> Front mounting (automatic insertion), screwless Isolated and separable. Consecutive or alternating connection. Red
20	0375 01 <sup>1</sup>	For 10 blocks with 5 mm width
50	0375 02 <sup>1</sup>	For 2 blocks with 5 mm width
20	0375 04 <sup>1</sup>	For 10 blocks with 6 mm width
50	0375 05 <sup>1</sup>	For 2 blocks with 6 mm width
20	0375 07 <sup>1</sup>	For 3 blocks with 8 mm width

1 : Blocks Cat. Nos. 0371 51/52 : upper level only  
Block Cat. No. 0372 56 : lower level only

Download the full file at

<http://assets.kempstoncontrols.com/doc/Legrand%20Industrial%20and%20power%20protection%20catalogue.pdf>



**KEMPSTON**  
CONTROLS