

chassis and internal doors

for Atlantic and Atlantic stainless steel enclosures



0361 03 mounted in enclosure
Cat. No. 0369 26 (p. 10)



0363 60 mounted in Atlantic metal
enclosures Cat. Nos. 0369 18 (p. 10)
with Cat. No. 0363 69




Accept key barrel

Enclosure and equipment selection chart **p. 8-9**
Technical characteristics **p. 20**

| Pack | Cat. Nos. | Chassis with insulating faceplates RAL 7035 |
|------|-----------|--|
| 1 | 0361 01 | Symmetrical rails 15 mm depth Supplied complete with uprights and faceplates Space between door and faceplate for Atlantic, Atlantic stainless steel enclosures : - 70 mm for enclosures depth 200 mm - 80 mm for enclosures depth 250 mm - 90 mm for enclosures depth 300 mm Self extinguishing 750 °C acc. to IEC EN 60695-2-11 For enclosures 400 x 300 x 200 30 modules (3 rows of 10) Supplied with 1 blanking plate |
| 1 | 0361 02 | For enclosures 500 x 400 x 200 48 modules (3 rows of 16) Supplied with 1 blanking plate |
| 1 | 0361 03 | For enclosures 600 x 400 x 250 48 modules (3 rows of 16) Supplied with 1 blanking plate |
| 1 | 0361 05 | For enclosures 700 x 500 x 250 84 modules (4 rows of 21) Supplied with 1 blanking plate |
| 1 | 0361 06 | For enclosures 800 x 600 x 300 108 modules (4 rows of 27) Supplied with 2 blanking plates |
| 1 | 0361 09 | For enclosures 1000 x 800 x 300 190 modules (5 rows of 38) Supplied with 2 blanking plates |
| 1 | 0361 10 | For enclosures 1200 x 800 x 300 228 modules (6 rows of 38) Supplied with 2 blanking plates |
| 10 | 0361 00 | Blanking plate 38 modules, length 684 mm |

| Pack | Cat. Nos. | Insulating internal doors RAL 7035 | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------------|-----------------------------|--|--------------------------------------|-----------------------------|------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|-----------|-----------|------------|-----------|-----------|
| | | For direct mounting in Atlantic metal enclosures IP XXB with Cat. No. 0363 69 Polyester fibre glass reinforced, height 4 mm Self-extinguishing 960°C acc. to IEC EN 60695-2-11 Grid lines integrated on back Centre marking on front Adjustable distance between enclosure door and internal door: 42 to 50 mm for Atlantic enclosures Right or left opening, captive hinge pins Double bar key: 1 key for 400 to 600 mm height, 2 keys for height from 700 mm Take key barrels and other barrels | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>For enclosures Height x Width(mm)</th> <th>Dim. (mm) Height x Width</th> <th>Usable dim. (mm) Height x Width</th> </tr> </thead> <tbody> <tr> <td>400 x 300</td> <td>341 x 236</td> <td>305 x 185</td> </tr> <tr> <td>500 x 400</td> <td>441 x 336</td> <td>405 x 250</td> </tr> <tr> <td>600 x 400</td> <td>541 x 336</td> <td>505 x 250</td> </tr> <tr> <td>700 x 500</td> <td>642 x 436</td> <td>500 x 340</td> </tr> <tr> <td>800 x 600</td> <td>742 x 536</td> <td>600 x 440</td> </tr> <tr> <td>1000 x 800</td> <td>942 x 736</td> <td>800 x 640</td> </tr> <tr> <td>1200 x 800</td> <td>942 x 736</td> <td>800 x 640</td> </tr> </tbody> </table> | For enclosures Height x Width(mm) | Dim. (mm) Height x Width | Usable dim. (mm) Height x Width | 400 x 300 | 341 x 236 | 305 x 185 | 500 x 400 | 441 x 336 | 405 x 250 | 600 x 400 | 541 x 336 | 505 x 250 | 700 x 500 | 642 x 436 | 500 x 340 | 800 x 600 | 742 x 536 | 600 x 440 | 1000 x 800 | 942 x 736 | 800 x 640 | 1200 x 800 | 942 x 736 | 800 x 640 |
| For enclosures Height x Width(mm) | Dim. (mm) Height x Width | Usable dim. (mm) Height x Width | | | | | | | | | | | | | | | | | | | | | | | | |
| 400 x 300 | 341 x 236 | 305 x 185 | | | | | | | | | | | | | | | | | | | | | | | | |
| 500 x 400 | 441 x 336 | 405 x 250 | | | | | | | | | | | | | | | | | | | | | | | | |
| 600 x 400 | 541 x 336 | 505 x 250 | | | | | | | | | | | | | | | | | | | | | | | | |
| 700 x 500 | 642 x 436 | 500 x 340 | | | | | | | | | | | | | | | | | | | | | | | | |
| 800 x 600 | 742 x 536 | 600 x 440 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1000 x 800 | 942 x 736 | 800 x 640 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1200 x 800 | 942 x 736 | 800 x 640 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Accessory | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0363 69 | Accessory for mounting insulating internal doors in Atlantic metal enclosures | | | | | | | | | | | | | | | | | | | | | | | | |

Assembled chassis with rails and Lina 25 uprights


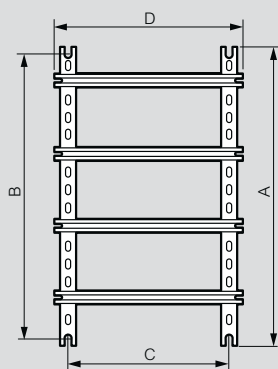


| Dimensions of enclosures Height x Width (mm) | Uprights height | | Rail length | | Chassis fixing | |
|--|-----------------|--------|-------------|--------|----------------|--|
| | A (mm) | D (mm) | B (mm) | C (mm) | | |
| 300 x 200 | 237 | 143 | 225 | 125 | | |
| 300 x 300 | 237 | 243 | 225 | 225 | | |
| 300 x 400 | 237 | 343 | 225 | 325 | | |
| 400 x 300 | 337 | 243 | 325 | 225 | | |
| 400 x 400 | 337 | 343 | 325 | 325 | | |
| 400 x 600 | 337 | 543 | 325 | 525 | | |
| 500 x 400 | 437 | 343 | 425 | 325 | | |
| 500 x 500 | 437 | 443 | 425 | 425 | | |
| 600 x 400 | 537 | 343 | 525 | 325 | | |
| 600 x 500 | 537 | 443 | 525 | 425 | | |
| 600 x 600 | 537 | 543 | 525 | 525 | | |
| 600 x 800 | 537 | 743 | 525 | 725 | | |
| 600 x 1000 | 537 | 943 | 525 | 925 | | |
| 700 x 500 | 637 | 443 | 625 | 425 | | |
| 800 x 600 | 737 | 543 | 725 | 525 | | |
| 800 x 800 | 737 | 743 | 725 | 725 | | |
| 800 x 1000 | 737 | 943 | 725 | 925 | | |
| 1000 x 600 | 937 | 543 | 925 | 525 | | |
| 1000 x 800 | 937 | 743 | 925 | 725 | | |
| 1000 x 1200 | 937 | 1143 | 925 | 1125 | | |
| 1200 x 600 | 1137 | 543 | 1125 | 525 | | |
| 1200 x 800 | 1137 | 743 | 1125 | 725 | | |
| 1200 x 1000 | 1137 | 943 | 1125 | 925 | | |
| 1400 x 800 | 1337 | 743 | 1325 | 725 | | |

Lina 25 sectioned uprights

Cat. Nos. 0361 50/51/52/53/54/55/56

Cat.No 0361 58/59





1: Saw notch for upright length x pitch 25, the 2 others for uprights Cat. Nos. 0361 50/51/52/53/54/55/56

Rails

Cat. No. 0374 02

Cat. Nos. 0367 80/81/82/83/84



Lock housings for rebate locks or key barrets

| Pack | Cat. Nos. | Description | Image |
|------|-----------|--------------------------------------|-------|
| 10 | 0368 04 | For Atlantic enclosures Lock | |
| 10 | 0368 05 | Handle (with blanking plate) | |
| 10 | 0368 06 | Handle fitted with key barrel 2433 A | |

| Padlocking | | | |
|------------------------|---------|---|--|
| Padlock adaptor | | | |
| 1 | 0365 11 | Takes 3 safety padlocks Cat. No. 0227 97 Shackle Ø6 mm max. For fitting on Atlantic handle or lock RAL 7021 painted steel | |
| Large padlock | | | |
| 1 | 0227 97 | To lock the handle of a modular device during maintenance Ø6 mm, 50 mm length Supplied with two keys and labels | |

| Locking latches | | | |
|------------------------|---------|-------------------------------|--|
| 10 | 0368 43 | For Atlantic 1-door enclosure | |

| Metal rebate locks | | | |
|---------------------------|---------|--|--|
| 10 | 0368 17 | For Atlantic enclosures Triangle male 6.5 mm | |
| 10 | 0368 18 | Triangle male 8 mm | |
| 10 | 0368 19 | Triangle male 9 mm (EDF) | |
| 10 | 0368 20 | Double bar | |

| Key barrets | | | |
|--|---------|--|--|
| For Atlantic enclosures Supplied with set of 2 key | | | |
| 10 | 0368 22 | For key No 405 | |
| 10 | 0368 23 | For key No 421 | |
| 10 | 0368 24 | For key No 455 | |
| 10 | 0368 25 | For key No 1242 E | |
| 10 | 0368 26 | For key No 2433 A | |
| 10 | 0368 27 | For key No 3113 A | |
| 10 | 0365 45 | Set of two 2433 A keys Other key code: please consult us | |

| Metal keys for rebate locks | | | |
|------------------------------------|---------|--------------------------|--|
| 10 | 0365 39 | Triangle male 6.5 mm | |
| 10 | 0365 40 | Triangle male 8 mm | |
| 10 | 0365 41 | Triangle male 9 mm (EDF) | |
| 10 | 0365 42 | Double bar | |

Download the full file at

<http://assets.kempstoncontrols.com/doc/Atlantic%20New%20IP66%20Metal%20Enclosures.pdf>



KEMPSTON
CONTROLS