


**Accessories**  
**BTS-DS20-TP1**

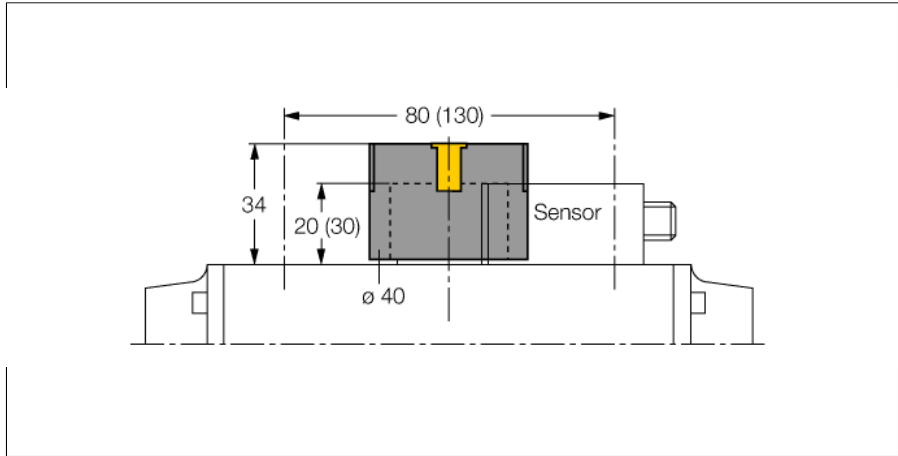

- Actuation kit (puck)
- End position damped
- For clockwise or counter-clockwise rotating drives
- Displays rotatable by 90 °
- Hole pattern on flange face 30 x 80 mm (30 x 130 mm); connection shaft (shaft peg) height 20 mm / max. Ø 30 mm

**General description**

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

<b>Type designation</b>	BTS-DS20-TP1
Ident no.	6900155
<b>Design</b>	Accessories for dual sensor, Ni4-DS20-...
Housing material	Plastic, PP-GF30

